

自主封測 品質把控 售後保障


WEB | WWW.TDSEMIC.COM




電源管理




顯示驅動




二三極管



LDO穩壓器




觸摸芯片



MOS管




運算放大器



存儲芯片



MCU



串口通信

BC807-40 5C-TD
(0.35)

產品規格說明書

FEATURES:

- Ideally suited for automatic insertion
- Epitaxial planar die construction
- Complementary NPN type available(BC817)

MARKING:5C

MAXIMUM RATINGS (Ta=25°C unless otherwise noted)


Parameter	Symbol	Value	Unit
Collector-Base Voltage	VCBO	-50	V
Collector-Emitter Voltage	VCEO	-45	V
Emitter-Base Voltage	VEBO	-5	V
Collector Current	IC	-500	mA
Collector Power Dissipation	PC	300	mW
Thermal Resistance From Junction To Ambient	RθJA	417	°C/W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-55~+150	°C

SOT-23

1.BASE

2.EMITTER

3.COLLECTOR







ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Collector-base breakdown voltage	V(BR)CBO	IC= -10μA, IE=0	-50			V
Collector-emitter breakdown voltage	V(BR)CEO	IC= -10mA, IB=0	-45			V
Emitter-base breakdown voltage	V(BR)EBO	IE=-10μA, IC=0	-5			V
Collector cut-off current	ICBO	VCB= -45 V , IE=0			-0.1	μA
Emitter cut-off current	IEBO	VEB= -4V , IC=0			-0.1	μA
DC current gain	hFE	VCE= -1V, IC= -100mA	100		600	
	hFE	VCE= -1V, IC= -500mA	40			
Collector-emitter saturation voltage	VCE(sat)	IC= -500mA, IB= -5mA			-0.65	V
Base-emitter saturation voltage	VBE(sat)	IC= -500 mA, IB= -5mA			-1.2	V
Transition frequency	fT	VCE= -5V, IC= -10mA f=100MHz	100			MHz





CLASSIFICATION OF hFE

Rank	BC807-16	BC807-25	BC807-40
Range	100-250	160-400	250-600
Marking	5A	5B	5C


Typical Electrical and Thermal Characteristics

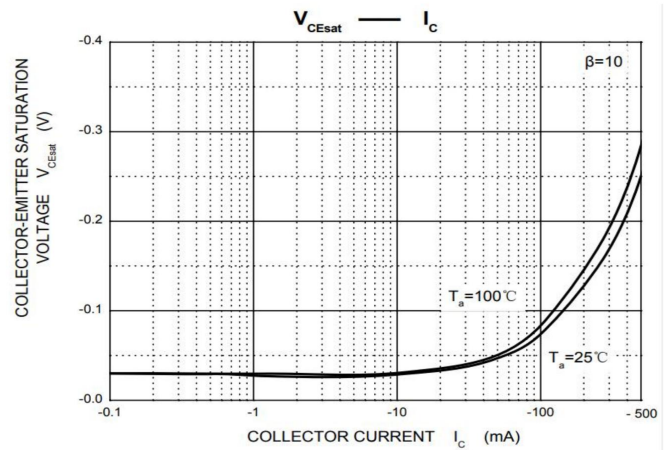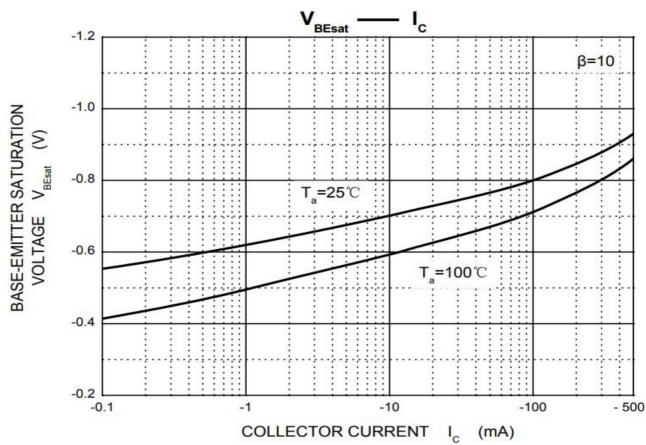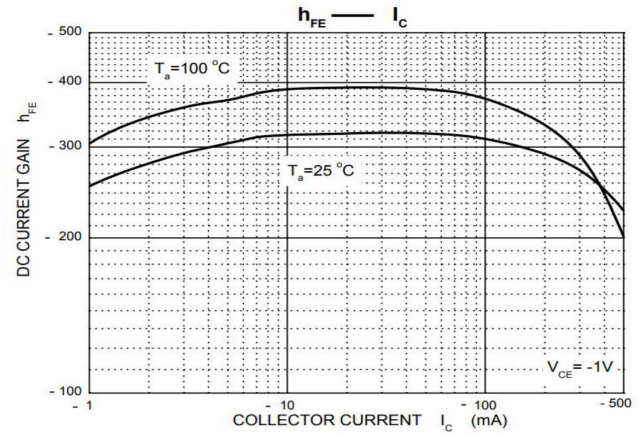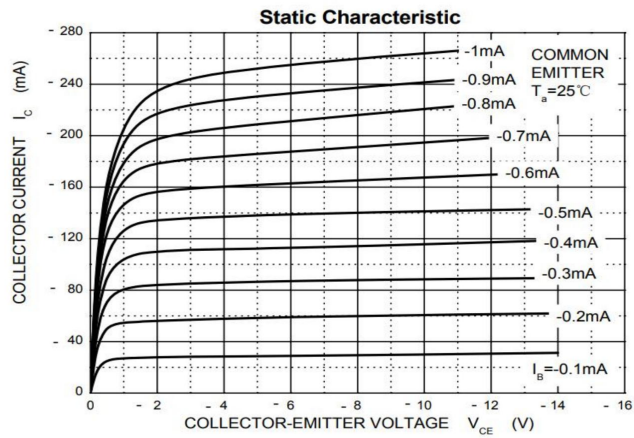

Typical Electrical and Thermal Characteristics

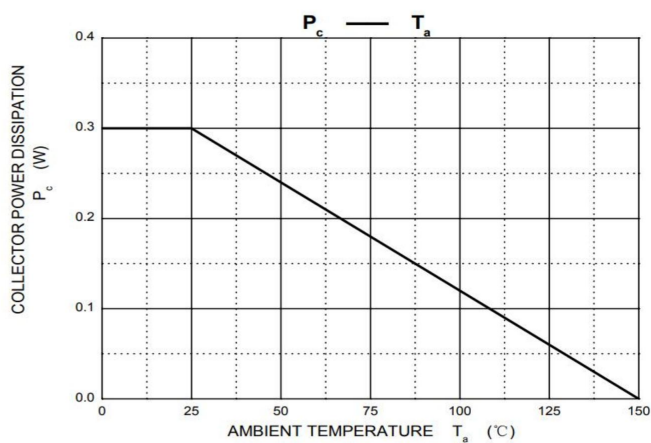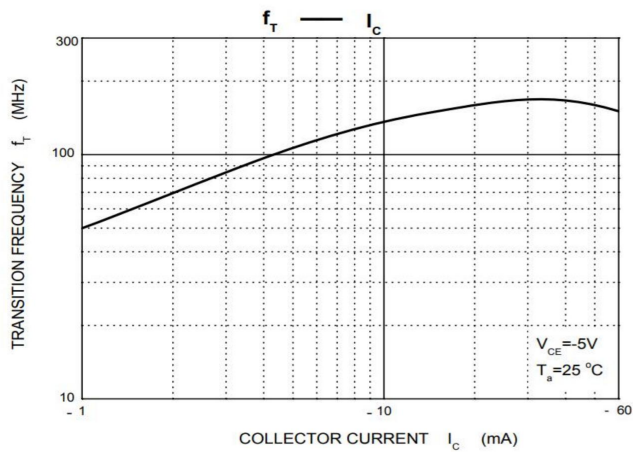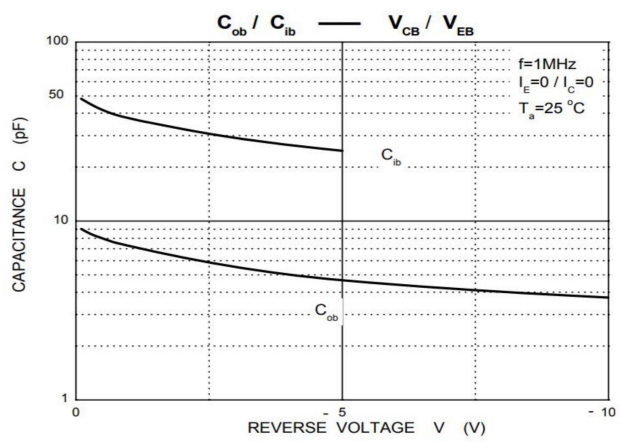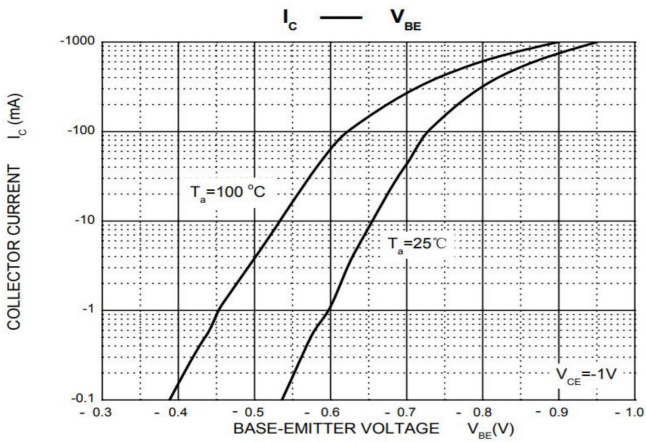

SOT-23 Package Outline Dimesions

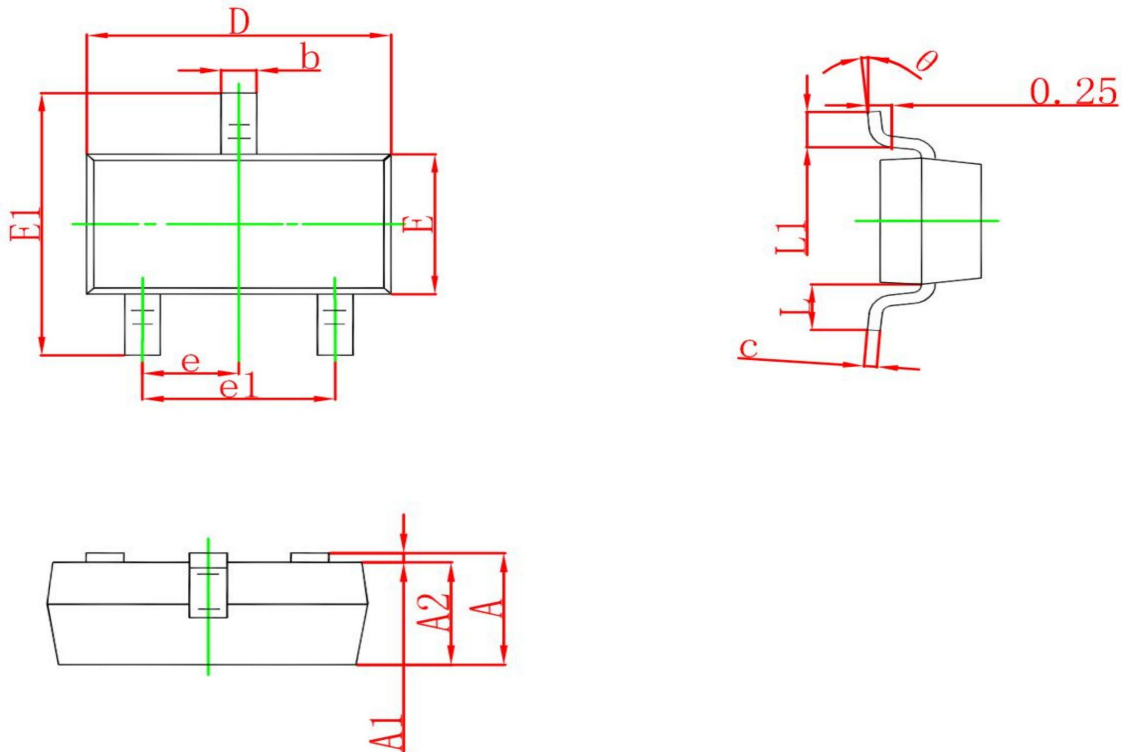

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°