



Features

- 3rd generation SiC MOSFET technology
- Optimized package with separate driver source pin
- High blocking voltage with low on-resistance
- High-speed switching with low capacitances
- Fast intrinsic diode with low reverse recovery (Q_{rr})
- Halogen free, RoHS compliant

Benefits


- Reduce switching losses and minimize gate ringing
- Higher system efficiency
- Reduce cooling requirements
- Increase power density
- Increase system switching frequency

Applications


- Renewable energy
- EV battery chargers
- High voltage DC/DC converters
- Switch Mode Power Supplies



Ordering Part Number	Package	Qty(PCS)
AIMZH120R060M1TXKSA1	TO-247-4L	30

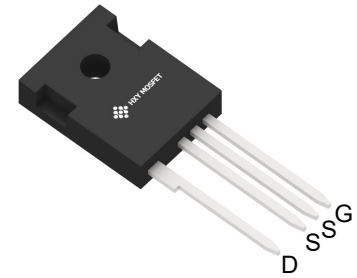

TO-247-4L

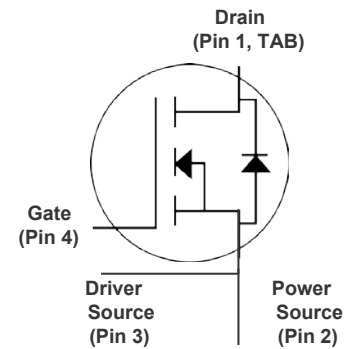

Maximum Ratings ($T_c = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	1200	V
Continuous drain current $T_c = 25^\circ\text{C}$, $V_{GS} = 18\text{V}$ $T_c = 100^\circ\text{C}$, $V_{GS} = 18\text{V}$	I_D	69 50.1	A
Pulsed drain current ($T_c = 25^\circ\text{C}$, t_p limited by T_{jmax})	$I_{D\text{ pulse}}$	80	A
Gate-Source voltage	V_{GS}	-10/+22	V
Power dissipation $T_c = 25^\circ\text{C}$ $T_c = 110^\circ\text{C}$	P_{tot}	426 185	W
Operating junction and storage temperature	T_j , T_{stg}	-55...+150	$^\circ\text{C}$
Thermal resistance, junction case. Max	R_{thJC}	0.35	$^\circ\text{C/W}$



Electrical Characteristics (at $T_J = 25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Drain-source breakdown voltage	BV _{DSS}	1200	-	-	V	V _{GS} =0V, I _D =100uA
Gate threshold voltage	V _{GS(th)}	2 -	2.9 1.85	4.5 -	V	V _{DS} =V _{GS} ,I _D =10mA T _C =25°C T _C =175°C
Zero gate voltage drain current	I _{DSS}	- -	0.1 11	100 -	μA	V _{DS} =1200V,V _{GS} =0V T _C =25°C T _C =175°C
Gate-source leakage current	I _{GSS}	- -	- -	100 100	nA	V _{GS} =22V,V _{DS} =0V V _{GS} =-10V,V _{DS} =0V
Drain-source on-state resistance	R _{DS(on)}	- -	59 81	70 -	mΩ	V _{GS} =18V, I _D =25A, T _J =25°C T _J =175°C
Transconductance	g _{fs}	- -	11.2 11.5	- -	S	I _{DS} =25A T _C =25°C T _C =175°C
Input Capacitance	C _{iss}	-	2073	-	pF	V _{DS} = 800V V _{GS} = 0V V _{AC} = 25mV f = 1MHz
Output Capacitance	C _{oss}	-	122	-		
Reverse Transfer Capacitance	C _{rss}	-	26	-		
Gate Total Charge	Q _G	-	137	-	nC	V _{DS} = 800V V _{GS} = -3/18V I _D = 25A
Gate-Source charge	Q _{gs}	-	22	-		
Gate-Drain charge	Q _{gd}	-	48	-		
Turn-On Switching Energy	E _{ON}	-	471.7	-	μJ	V _{DD} = 800V V _{GS} = -5/+18V I _D = 25A R _G = 4.7Ω L = 100uH
Turn-Off Switching Energy	E _{OFF}	-	137.4	-		
Turn-on delay time	t _{d(on)}	-	14.4	-	ns	
Rise time	t _r	-	42.2	-		
Turn-off delay time	t _{d(off)}	-	38.1	-		
Fall time	t _f	-	13.7	-		
Gate resistance	R _G	-	1.89	-	Ω	V _{AC} = 25mV, f=1MHz



Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Body Diode Forward Voltage	V_{SD}		4.14		V	$V_{GS}=0V, I_{SD}=15A, T_J=25^{\circ}C$
			3.90			$V_{GS}=0V, I_{SD}=15A, T_J=175^{\circ}C$
Continuous Source Current	I_{SD}	-	-	54	ns	$V_{GS}=-5V, T_J=25^{\circ}C$
		-	-	32		$V_{GS}=-5V, T_J=100^{\circ}C$
Body Diode Reverse Recovery Time	t_{rr}	-	20.7	-	ns	$V_R = 800V$ $I_D = 25A$ $di/dt = 1000A/\mu S$ $T_J = 25^{\circ}C$
Body Diode Reverse Recovery Charge	Q_{rr}	-	111.3	-	nC	

Typical Performance Characteristics

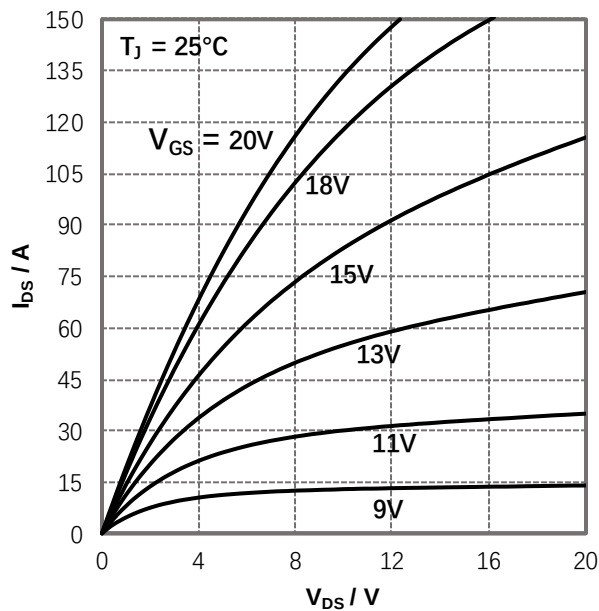


Fig 1. Output Characteristics ($T_J = 25^{\circ}C$)

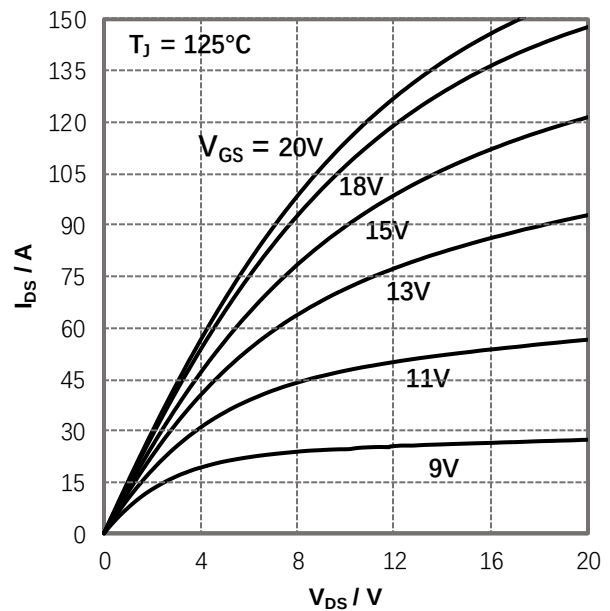
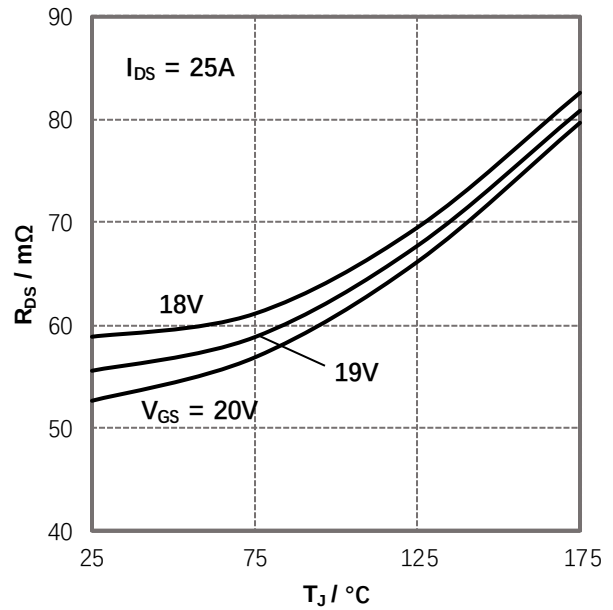
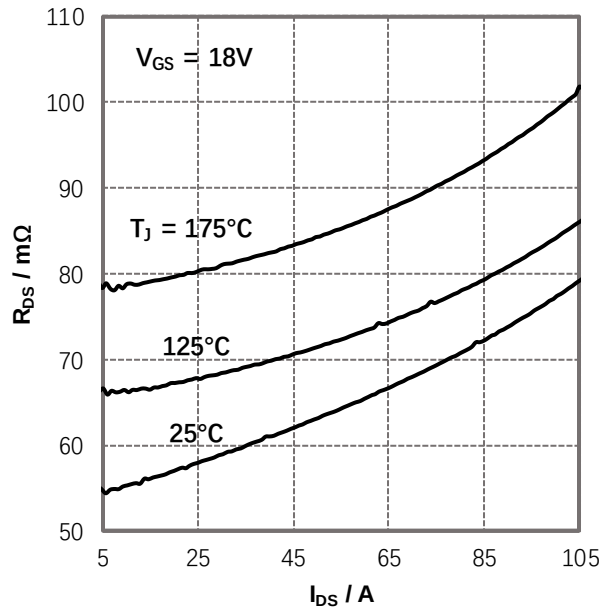
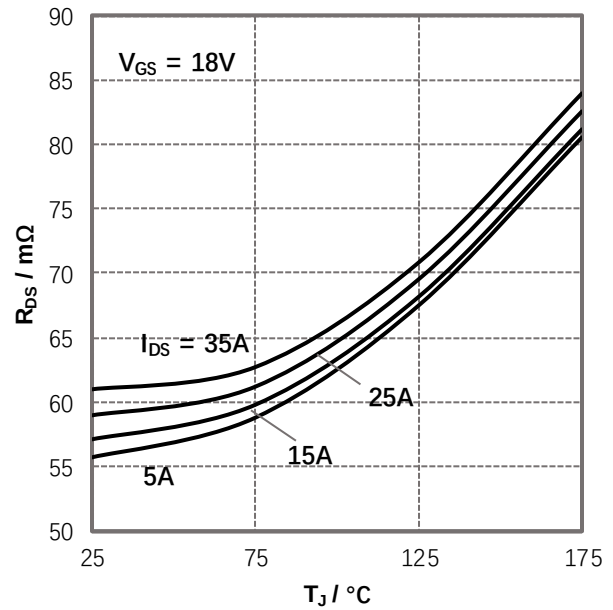
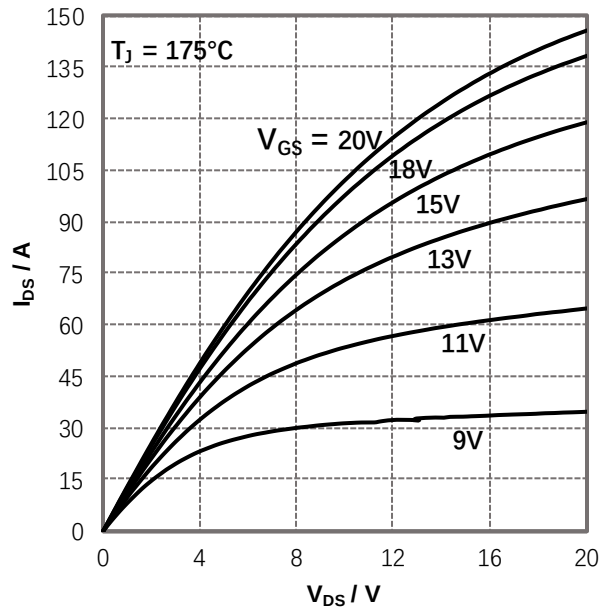
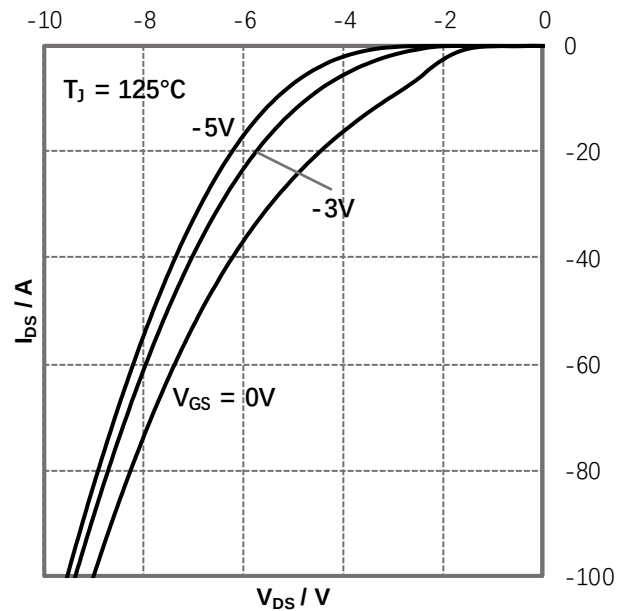
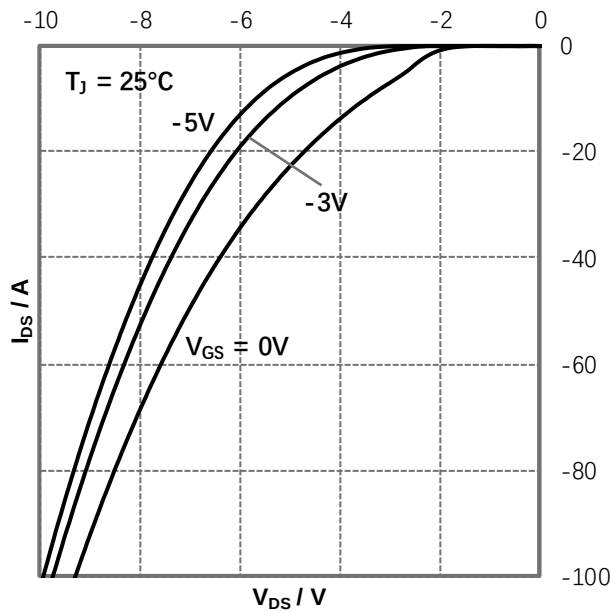
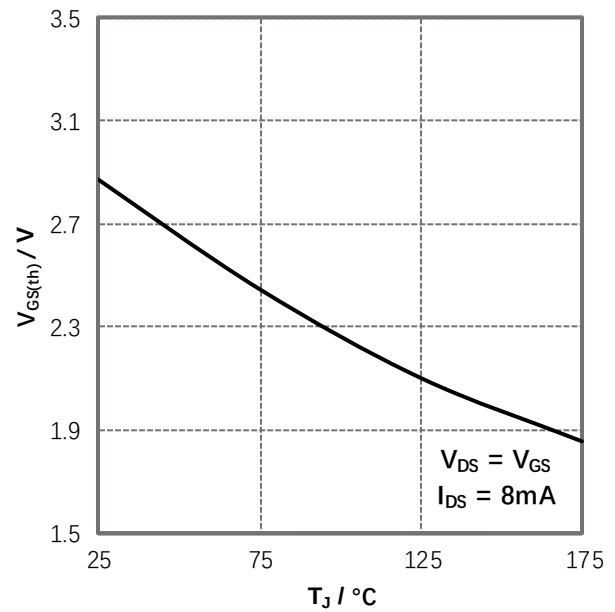
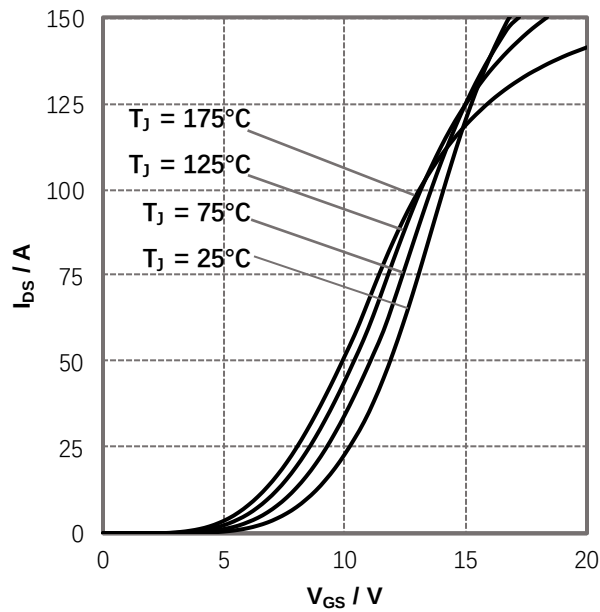


Fig 2. Output Characteristics ($T_J = 125^{\circ}C$)





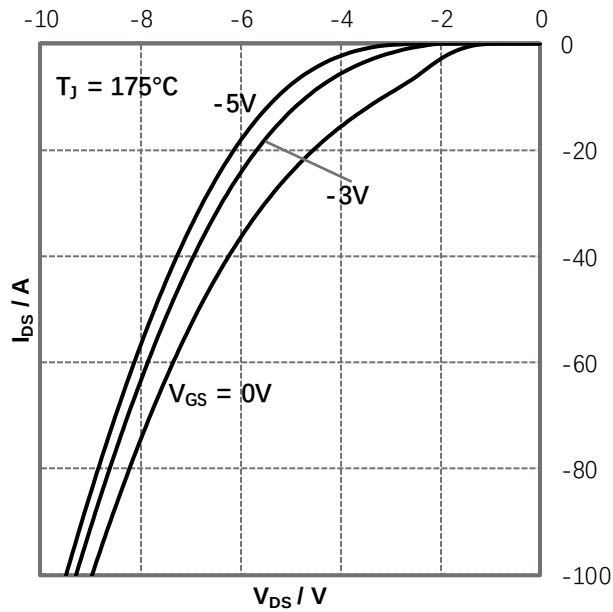


Fig 11. Body-diode Characteristics ($T_j = -175^\circ\text{C}$)

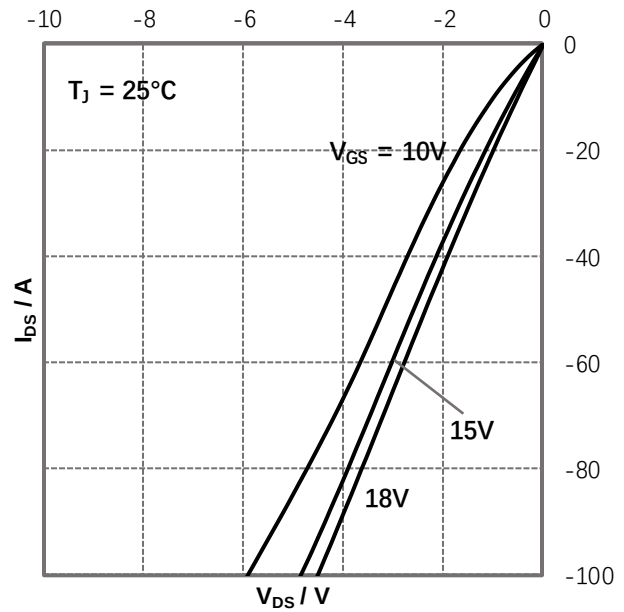


Fig 12. 3rd Quadrant Characteristics ($T_j = -25^\circ\text{C}$)

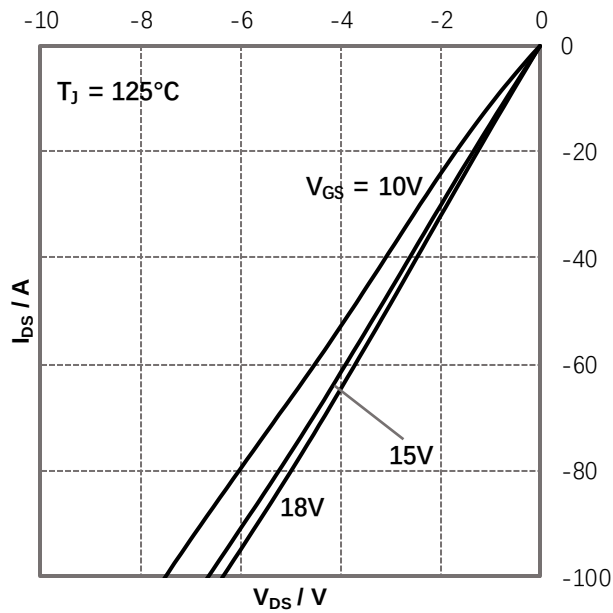


Fig 13. 3rd Quadrant Characteristics ($T_j = -125^\circ\text{C}$)

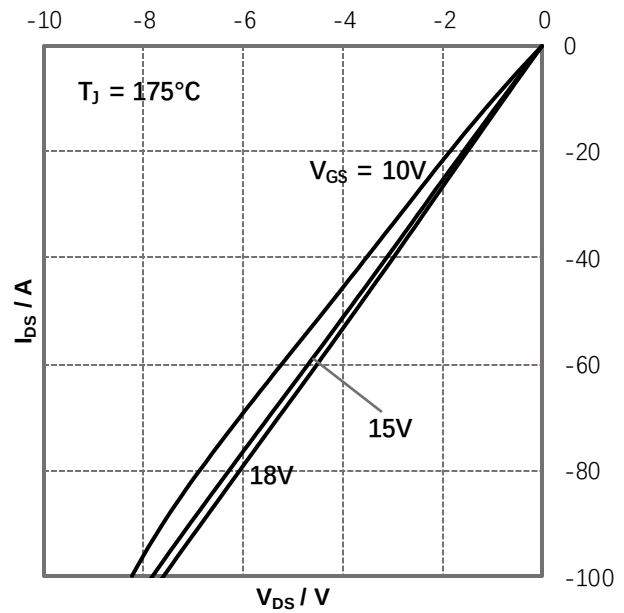


Fig 14. 3rd Quadrant Characteristics ($T_j = -175^\circ\text{C}$)

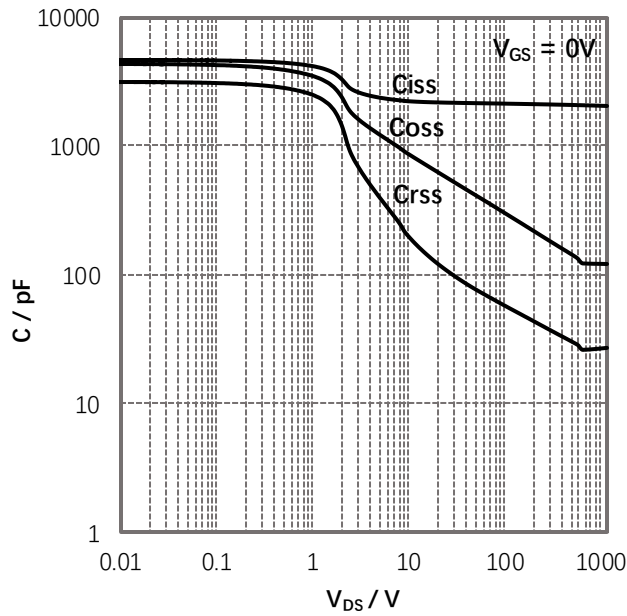


Fig 15. Capacitance Characteristics

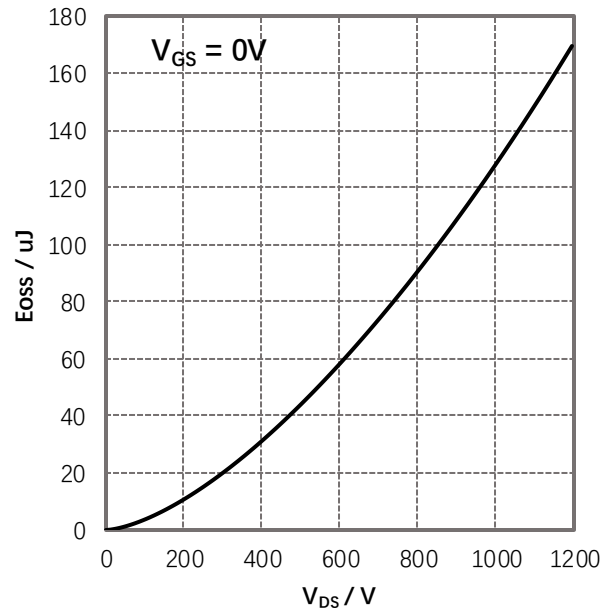


Fig 16. Output Capacitor Stored Energy

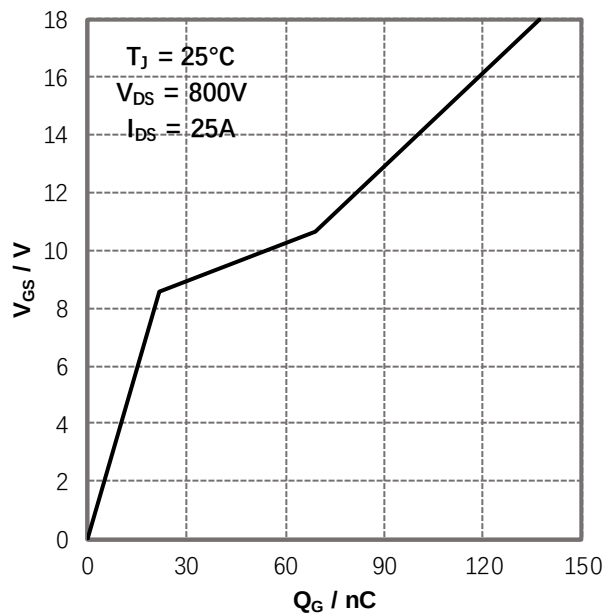


Fig 17. Gate Charge Characteristics

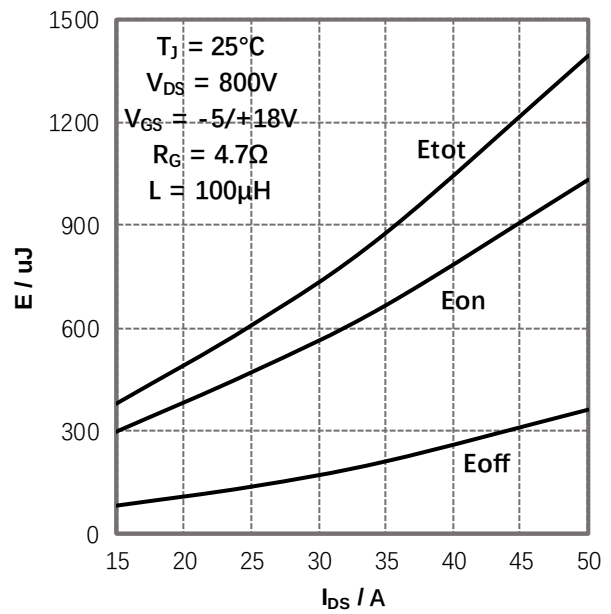


Figure 18. Clamped Inductive Switching Energy vs. Drain Current

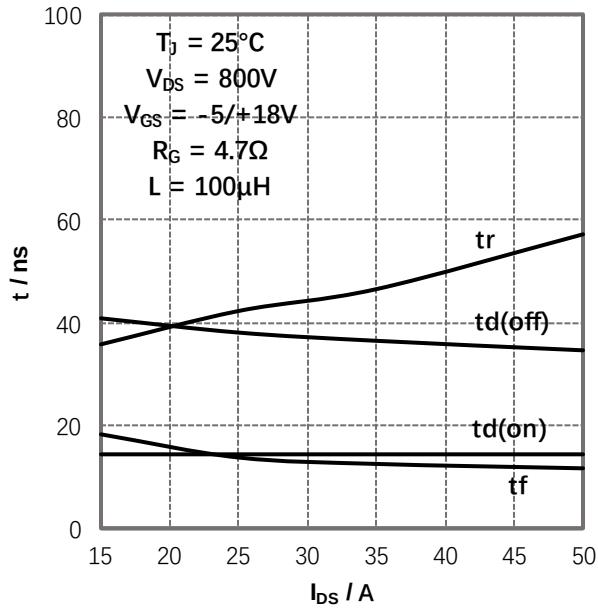


Fig 19. Switching Times vs. I_{DS}

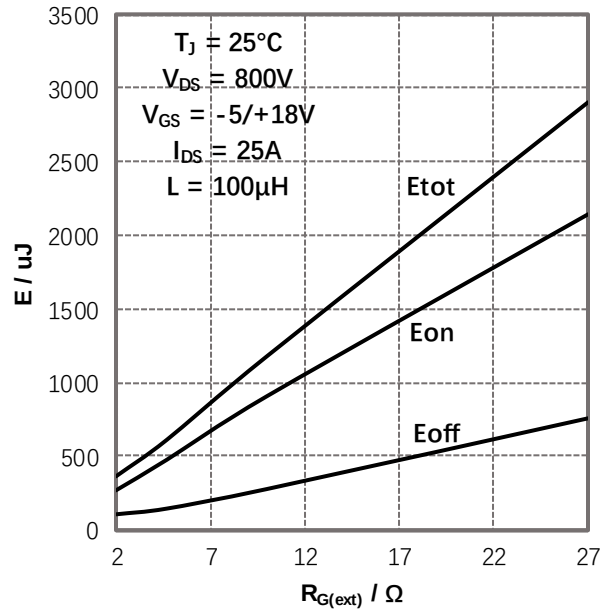


Fig 20. Clamped Inductive Switching Energy vs. Temperature

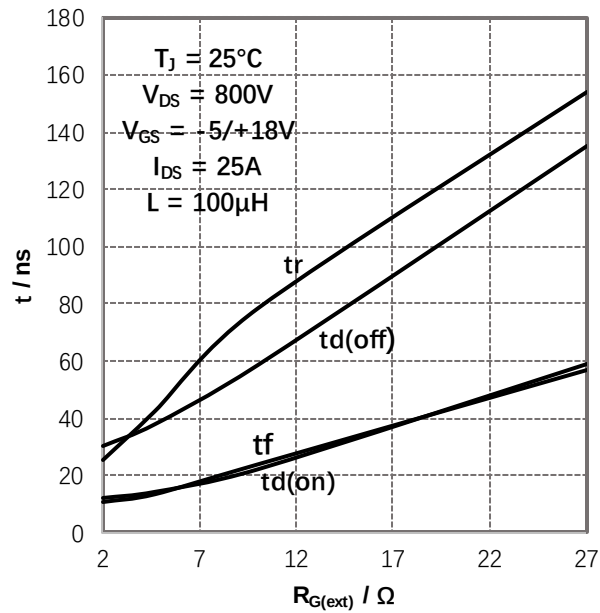


Fig 21. Switching Times vs. R_{G(ext)}

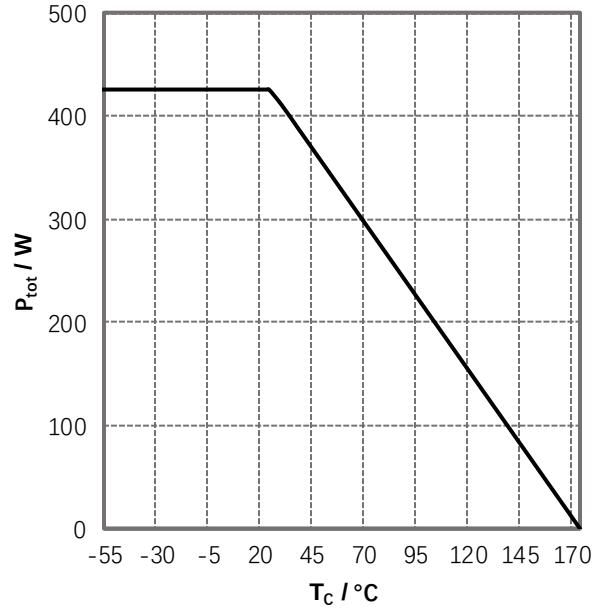


Fig 22. Maximum Power Dissipation Derating vs. Case Temperature

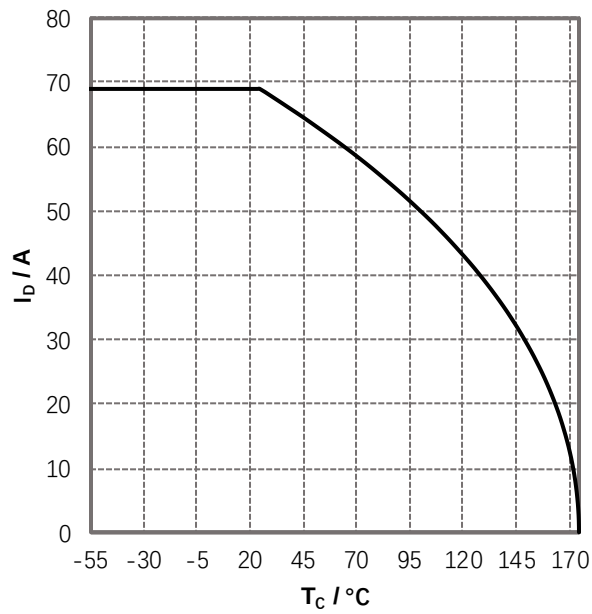


Fig 23. Continuous Drain Current Derating vs. Case Temperature

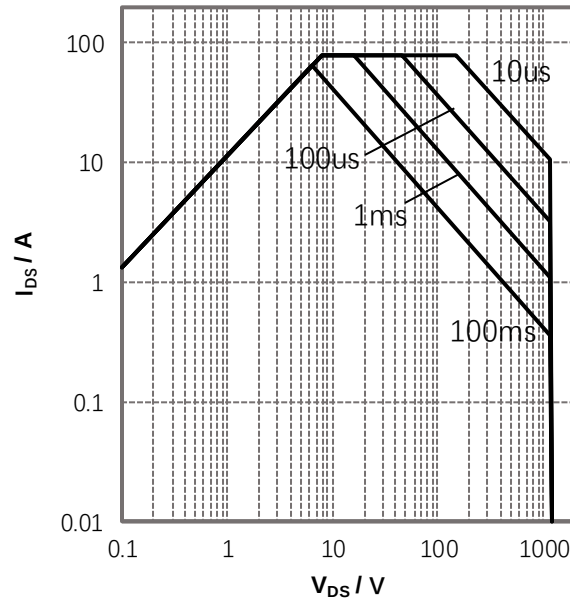


Fig 24. Safe Operating Area


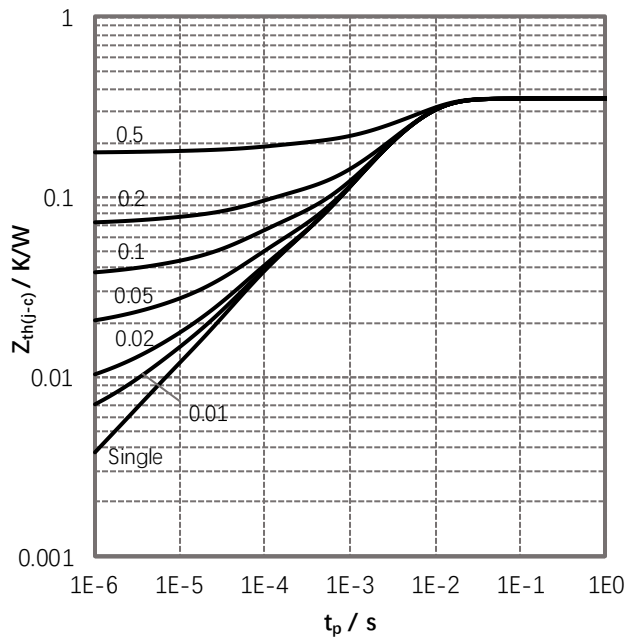


Fig 25. Transient Thermal Impedance



Package Dimensions

Package TO-247-4L

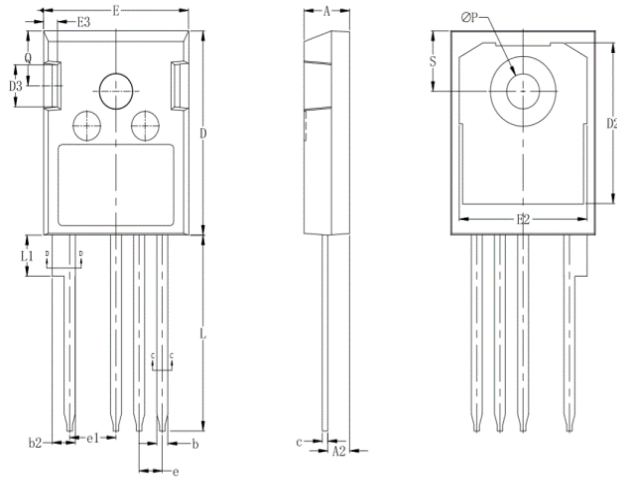

Items	Values(mm)	
	MIN	MAX
A	4.8	5.2
A2	2.2	2.6
b	1.05	1.4
b2	2.4	2.75
c	0.5	0.75
D	20	21.5
D2	15.5	17.2
D3	4	5
E	15.5	16.1
E2	13	15
E3	1	2
e	2.54 BSC.	
e1	5.08 BSC.	
L	19	21
L1	4	4.45
ΦP	3.5	3.7
Q	5.4	5.9
S	5.9	6.4



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.