

P-Channel Enhancement Mode Power MOSFET

Description


The GT300P15M uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge. It can be used in a wide variety of applications.

General Features

- V_{DS} -150V
- I_D (at $V_{GS} = -10V$) -90A
- $R_{DS(ON)}$ (at $V_{GS} = -10V$) < 34mΩ
- 100% Avalanche Tested
- RoHS Compliant

Application

- Power switch
- DC/DC converters



Schematic diagram



TO-263

Ordering Information

Device	Package	Marking	Packaging
GT300P15M	TO-263	GT300P15	800pcs/Reel

Absolute Maximum Ratings $T_C = 25^\circ\text{C}$, unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-150	V
Continuous Drain Current	I_D	$T_C = 25^\circ\text{C}$ -90	A
		$T_C = 100^\circ\text{C}$ -57	
Pulsed Drain Current (note1)	I_{DM}	-360	A
Gate-Source Voltage	V_{GS}	± 20	V
Power Dissipation	P_D	300	W
Single pulse avalanche energy (note2)	E_{AS}	1024	mJ
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 To 150	$^\circ\text{C}$

Thermal Resistance

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Ambient	R_{thJA}	50	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	R_{thJC}	0.42	$^\circ\text{C/W}$

Specifications T _J = 25°C, unless otherwise noted						
Parameter	Symbol	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
Static Parameters						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-150	--	--	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -150V, V _{GS} = 0V	--	--	-1	μA
Gate-Source Leakage	I _{GSS}	V _{GS} = ±20V	--	--	±100	nA
Gate-Source Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-2.0	-3.5	-4.0	V
Drain-Source On-Resistance	R _{DS(on)}	V _{GS} = -10V, I _D = -40A	--	28	34	mΩ
Forward Transconductance	g _{FS}	V _{DS} = -5V, I _D = -40A	--	38	--	S
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = -75V, f = 0.5MHz	--	8000	--	pF
Output Capacitance	C _{oss}		--	500	--	
Reverse Transfer Capacitance	C _{rss}		--	15	--	
Total Gate Charge	Q _g	V _{DD} = -75V, I _D = -40A, V _{GS} = -10V	--	116	--	nC
Gate-Source Charge	Q _{gs}		--	50	--	
Gate-Drain Charge	Q _{gd}		--	12	--	
Turn-on Delay Time	t _{d(on)}	V _{DD} = -75V, I _D = -40A, R _G = 1.6Ω	--	28	--	ns
Turn-on Rise Time	t _r		--	34	--	
Turn-off Delay Time	t _{d(off)}		--	96	--	
Turn-off Fall Time	t _f		--	32	--	
Drain-Source Body Diode Characteristics						
Continuous Body Diode Current	I _S	T _C = 25°C	--	--	-90	A
Body Diode Voltage	V _{SD}	T _J = 25°C, I _{SD} = -40A, V _{GS} = 0V	--	--	-1.2	V
Reverse Recovery Charge	Q _{rr}	I _F = -40A, V _{GS} = 0V di/dt=-100A/us	--	196	--	nC
Reverse Recovery Time	T _{rr}		--	104	--	ns


Notes

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. EAS condition : $T_J = 25^{\circ}\text{C}, V_{DD} = 50V, V_{GS} = 10V, L = 0.5mH, R_g = 25\Omega$

The table shows the minimum avalanche energy, which is 2809mJ when the device is tested until failure

3. Identical low side and high side switch with identical R_G

Gate Charge Test Circuit

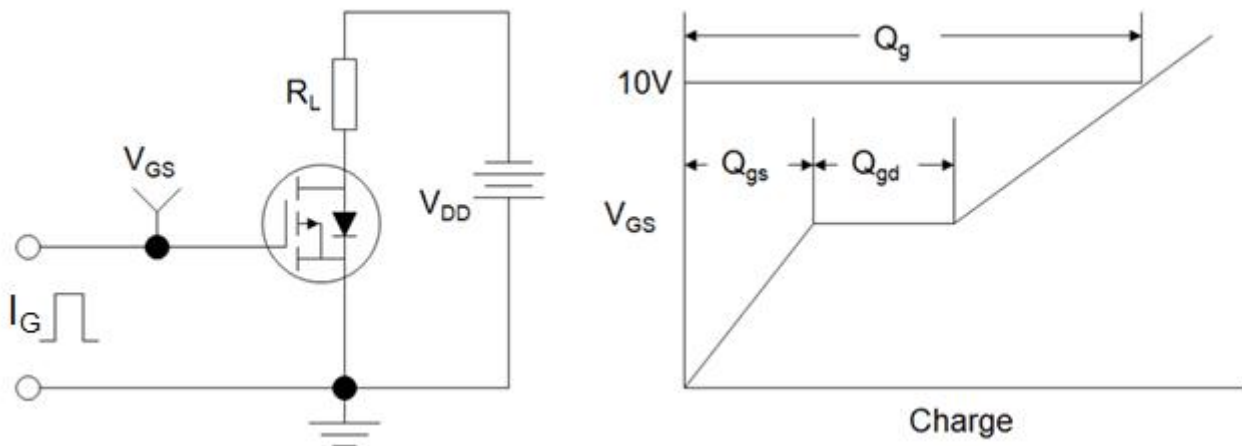

Switch Time Test Circuit



EAS Test Circuit



Typical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted

Figure 1. Output Characteristics

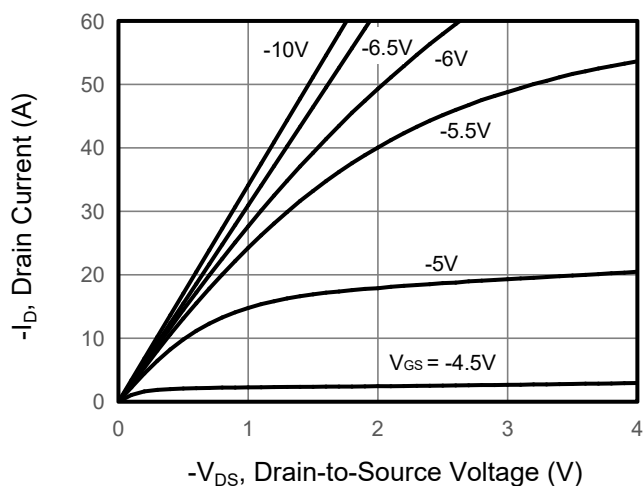


Figure 2. Transfer Characteristics

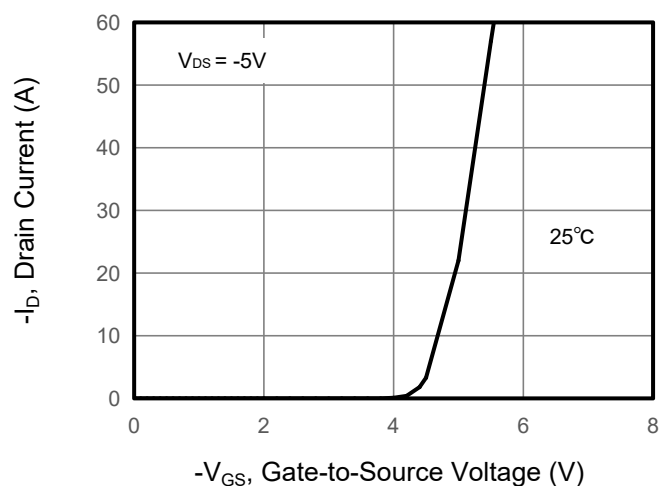


Figure 3. Drain Source On Resistance

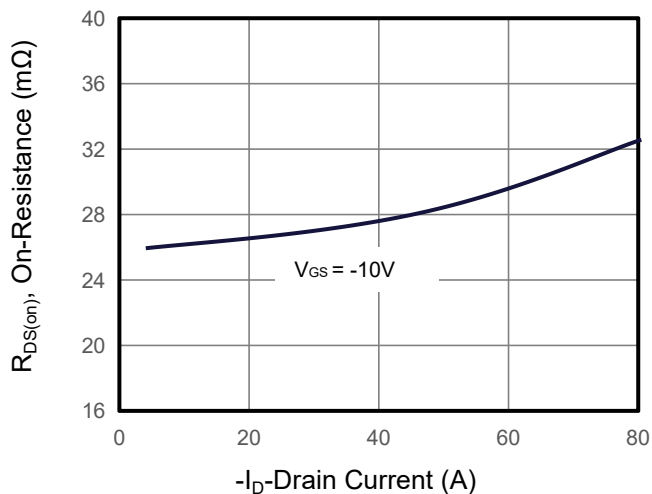


Figure 4. Gate Charge

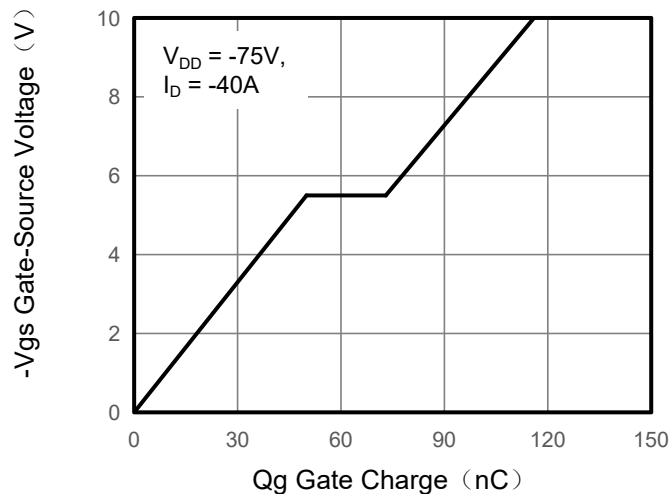


Figure 5. Capacitance


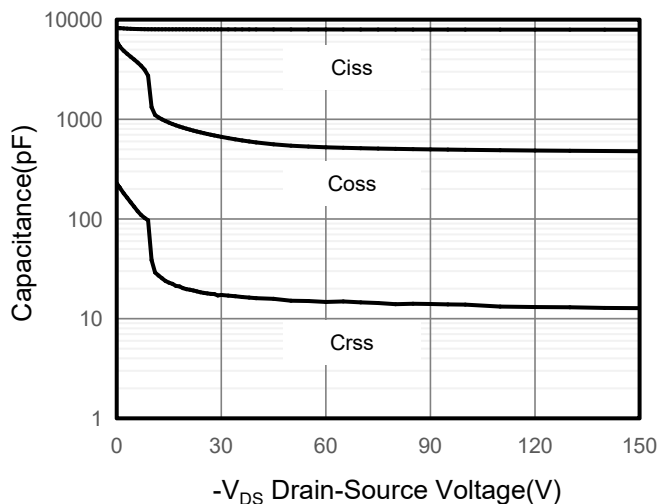


Figure 6. Source-Drain Diode Forward

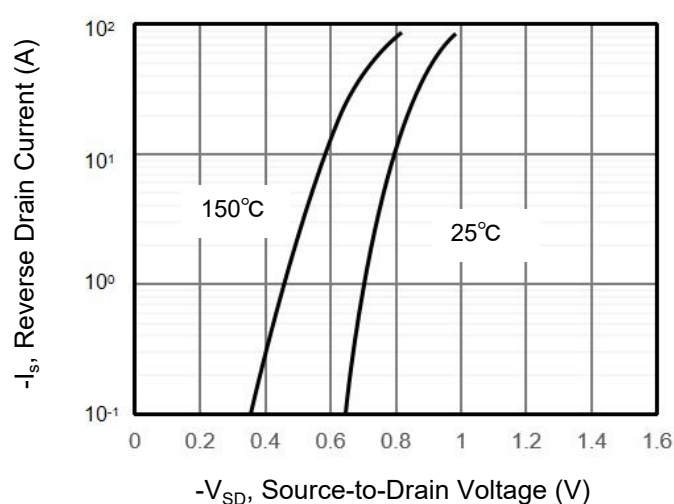

Typical Characteristics $T_J = 25^\circ\text{C}$, unless otherwise noted

Figure 7. Drain-Source On-Resistance

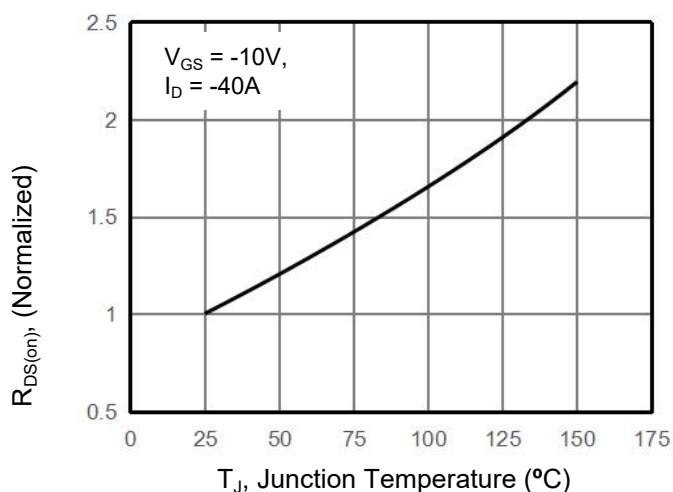


Figure 8. Safe Operation Area

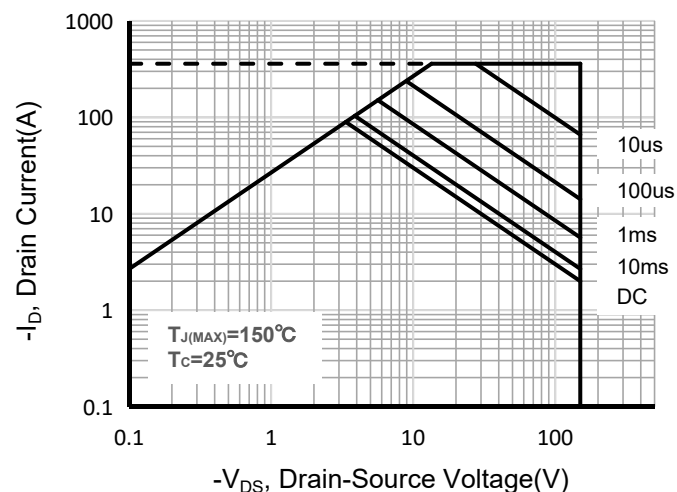


Figure 9. Maximum Continuous Drain Current vs Case Temperature



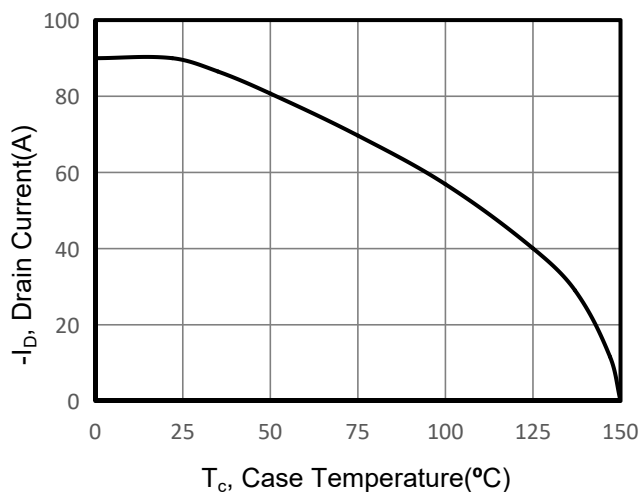



Figure 10. Normalized Maximum Transient Thermal Impedance

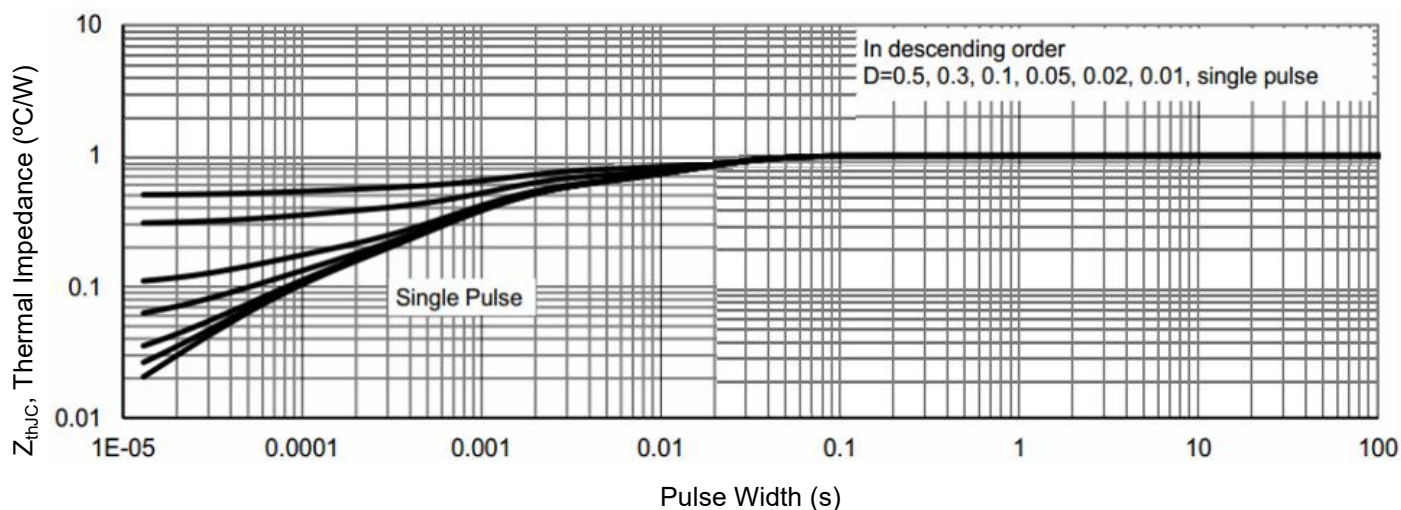


TO-263 Package Information

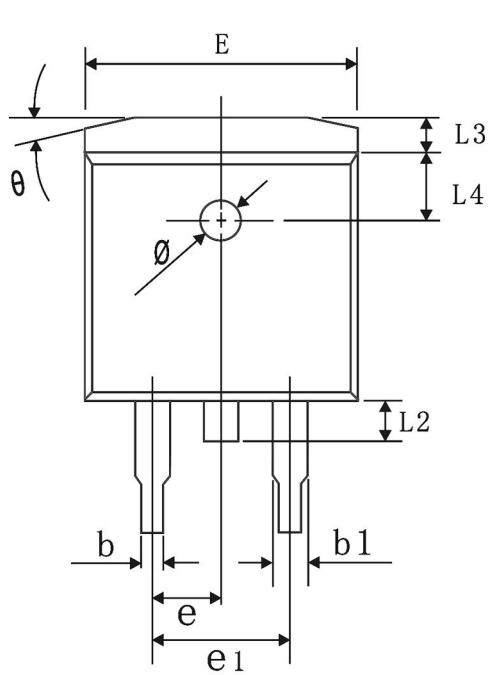


TOP VIEW

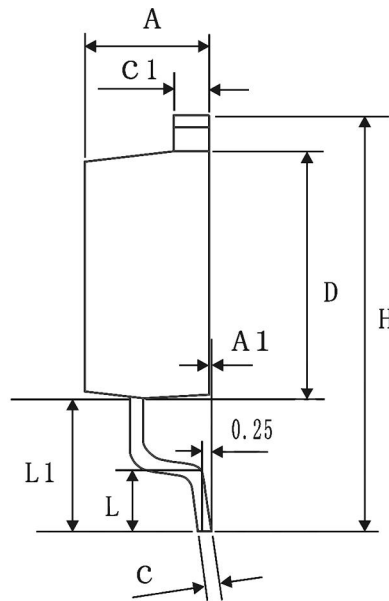

SIDE VIEW

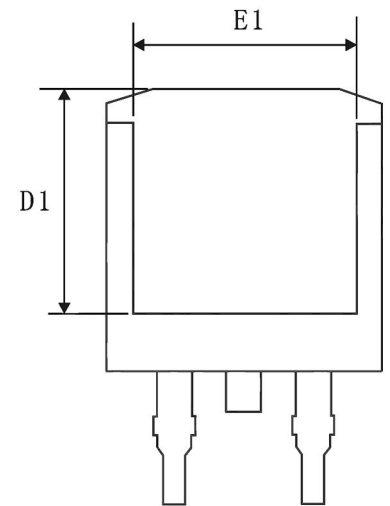

BOTTOM VIEW



SIDE VIEW

COMMON DIMENSIONS
(UNITS OF MEASURE=mm)

SYMBOL	MIN	NOM	MAX
A	4.30	4.50	4.70
A1	0.00	NA	0.25
b	0.70	0.80	0.90
b1	1.20	1.30	1.40
c	0.40	0.47	0.55
c1	1.25	1.30	1.35
D	9.00	9.10	9.20
D1	8.00	8.10	8.20
H	14.9	15.2	15.5
E	9.80	10.0	10.2
E1	7.85	8.00	8.15
e1	4.93	5.08	5.23
L	2.00	2.20	2.45
L1	4.60	4.80	5.00
L2	1.30	1.50	1.70
L3	1.15	1.25	1.35
L4	2.40	2.50	2.60
Ø	1.5 REF		
e	2.54 BSC		
θ	13° TYP		