


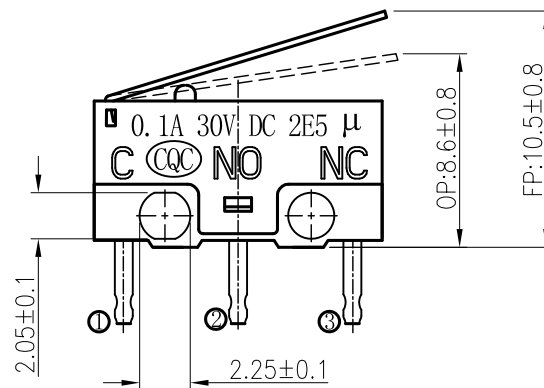
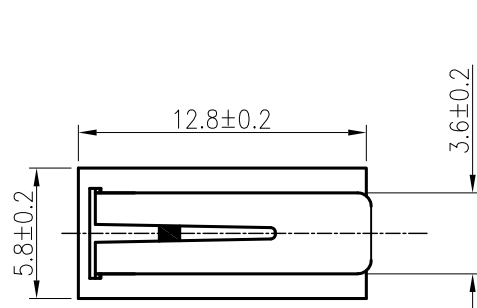
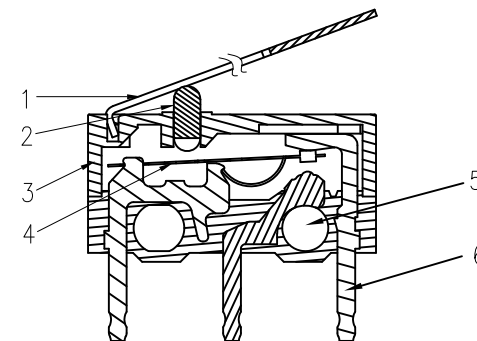
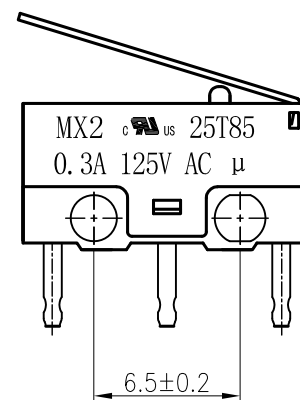


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW DWG		

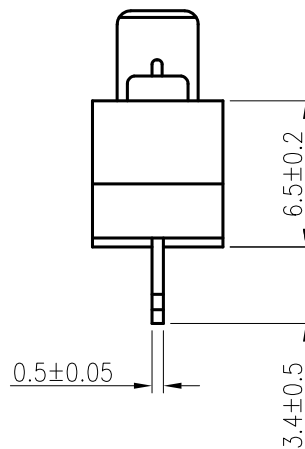

CIRCUIT DIAGRAM

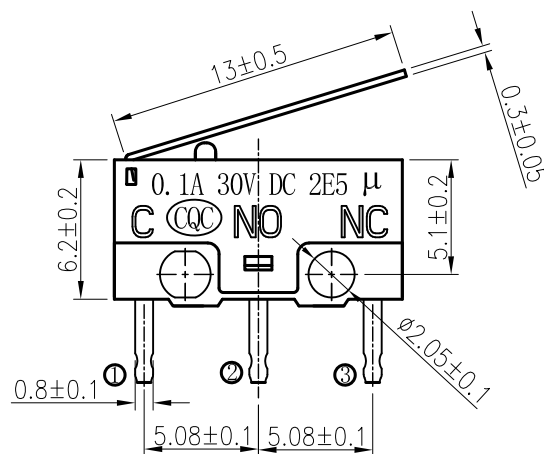

- (1) Temperature: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$
- (2) Relative humidity: $\leq 85\% \text{ RH}$
- (3) Rating: 0.1A 30V DC/0.3A 125V AC
- (4) Contact Resistance: $\leq 100\text{m ohm}$
- (5) Insulation Resistance: $\geq 100\text{m ohm}$
- (6) withstand voltage: AC 500V for 1min.
- (7) Soldering Temperature: $260\pm 5^{\circ}\text{C}$ 5 $\pm 0.5\text{s}$
- (8) Operating Force: 30 $\pm 10\text{gf}$
- (9) Travel: As the chart shows.
- (10) Durability test: $\geq 200,000\text{cycles}$



深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
电话: 0755-27111216 传真: 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 微动开关			
X.X	± 0.30	X.X*	$\pm 3^{\circ}$	APPD: 核准: 谢亮	PART NO: HDGC-Z13P030		
X.XX	± 0.30	X.XX*	$\pm 2^{\circ}$	CHECK: 校对: 王建业	DATE	SCALE	UNIT
X.XXX	± 0.10	X.XXX*	$\pm 1^{\circ}$	DRAW: 绘图: 黄艳兰		1:1	mm
							A001