

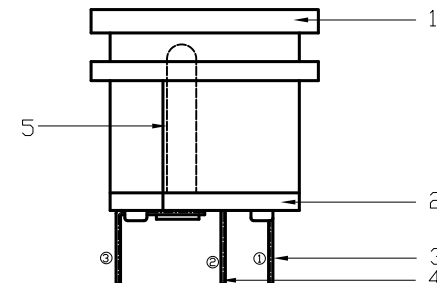
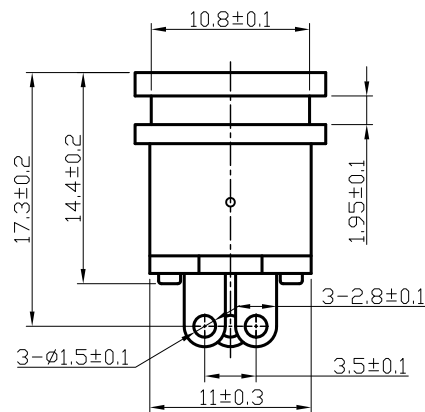
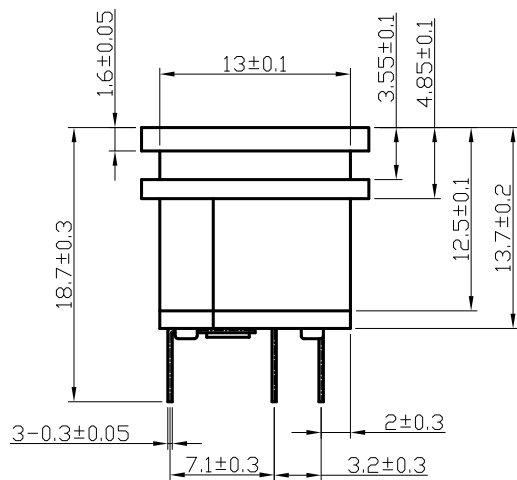



修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW DWG		

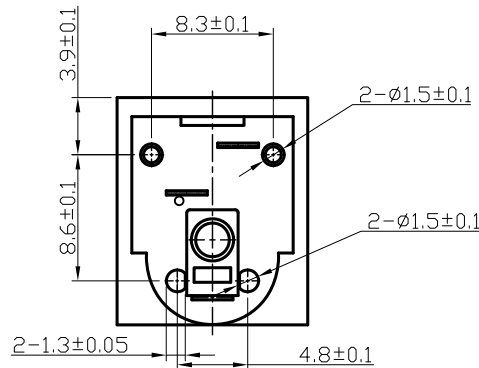


(8)Operating Force:insertion force 950±400gf,withdrawal force 850±400gf

- (1)Temperature: -25℃~85℃
- (2)Relative humidity: ≤85% RH
- (3)Rating: DC 12V 3A
- (4)Contact Resistance:≤100m ohm
- (5)Insulation Resistance:≥100M ohm
- (6)Withstand Voltage: AC 500V for 1min
- (7)Soldering Temperature: 260±5℃ 5±0.5s
- (8)Operating Force:As the chart shows
- (9)Switching life:≥5,000cycles(15-18c/m unloading)

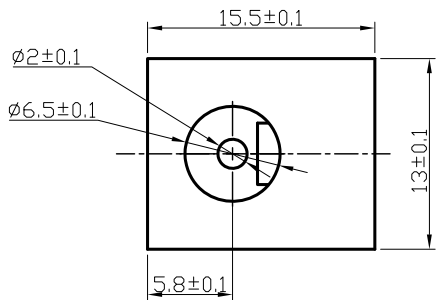

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
电话: 0755-27111216 传真: 0755-29940187

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差参数表



TITLE:
产品名称: DC座

X.X	±0.30	X.X*	±3°	APPD: 核准: 谢亮	PART NO: DC-2. 0-3W-6. 5-0. 7E 产品编号:			
X.XX	±0.30	X.XX*	±2°	CHECK: 校对: 王建业	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX*	±1°	DRAW: 绘图: 黄艳兰		1:1	mm	A001