


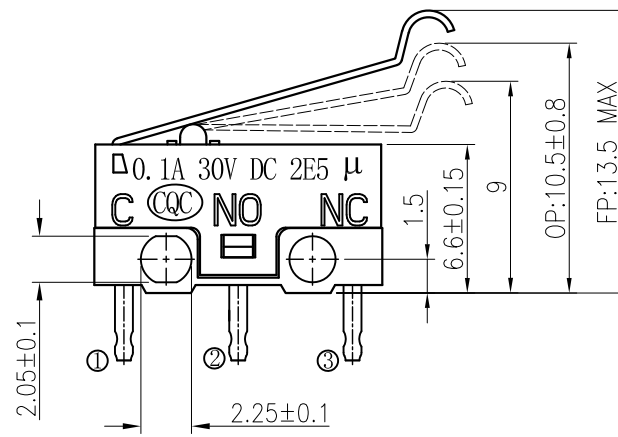
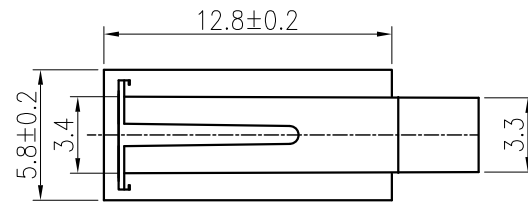
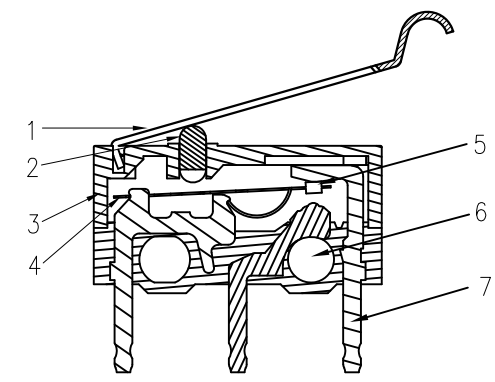
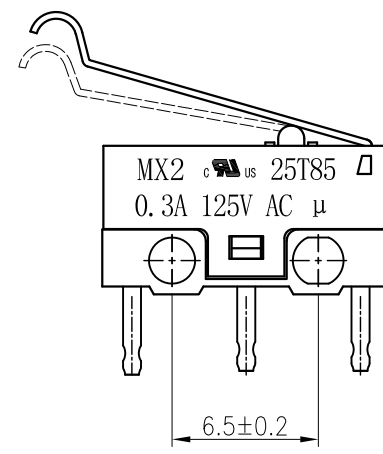


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW DWG		

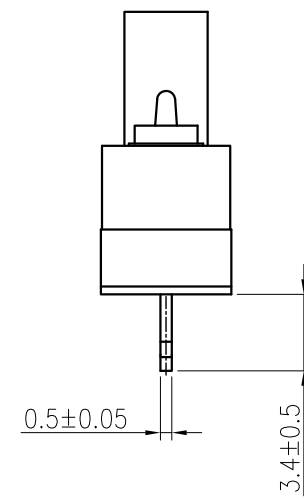

CIRCUIT DIAGRAM

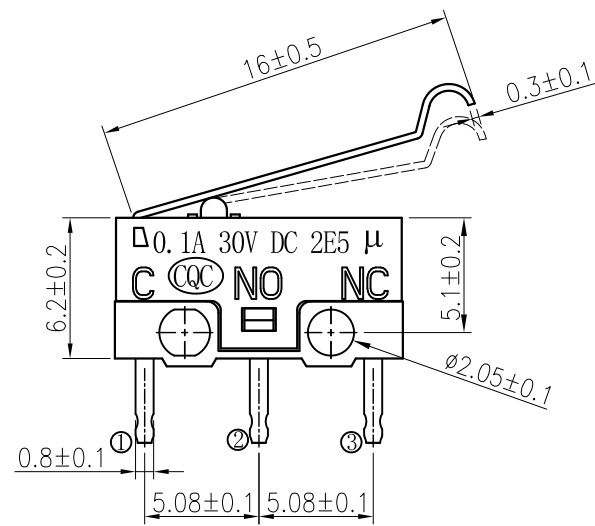

- (1)Temperature: -25℃~85℃
- (2)Relative humidity: ≤85% RH
- (3)Rating: 0.1A 30V DC/0.3A 125V AC
- (4)Contact Resistance:≤100m ohm
- (5)Insulation Resistance:≥100M ohm
- (6)withstand voltage:AC 500V for 1min.
- (7)Soldering Temperature: 260±5℃ 5±0.5s
- (8)Operating Force:30±10gf
- (9)Travel:As the chart shows.
- (10)Durability test:≥200,000cycles



深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
电话: 0755-27111216 传真: 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表		TITLE: 产品名称: 微动开关	
X.X ±0.30	X.X* ±3°	APPD: 核准: 谢亮	PART NO: 产品编号: HDGC-Z16BP030
X.XX ±0.30	X.XX* ±2°	CHECK: 校对: 王建业	DATE SCALE UNIT CODE NUMBER
X.XXX ±0.10	X.XXX* ±1°	DRAW: 绘图: 黄艳兰	1:1 mm A001