


FEATURES

- ◆ We declare that the material of product compliance with RoHS requirements and Halogen Free.
- ◆ S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.
- ◆ 2 Unidirectional transil functions
- ◆ Low leakage current:IR max< 20 μ A at VRM
- ◆ 260W peak pulse power(8/20 μ s)
- ◆ Transient protection for data lines as per IEC61000-4-2 (ESD) 23KV(air) 23KV(contact)IEC61000-4-5(Lightning) see IPPM below



APPLICATIONS


- ◆ Computers
- ◆ Printers
- ◆ Communication systems

ABSOLUTE RATINGS($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit
Peak Pulse Power ($tp = 8/20\mu\text{s}$)	PPP	260	W
Lead Solder Temperature – Maximum(10 Second Duration)	TL	260	°C
Storage Temperature Range	T _{stg}	-55~+150	°C
Operating Temperature Range	T _{op}	-40~+125	°C
Maximum junction temperature	T _j	150	°C
Electrostatic discharge IEC61000-4-2 air discharge IEC61000-4-2 contact discharge	V _{PP}	23 23	kV

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)



Symbol	Parameter
VRM	Stand-off voltage
VBR	Breakdown voltage
VCL	Clamping voltage
IRM	Leakage current
IPPM	Peak pulse current

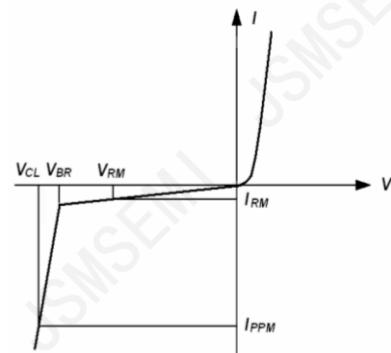

 ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

DEVICE	VRWM (V)	IR (μA) @VRWM	VBR (V) @IT (Note 1)	IT (mA)	VC (V) @IPP=1A	VC (V) @IPP=13A	IPP(A) @tp=8/20 μs	C (pF) f=1MHz
	Max.	Max.	Min.		Max.	Max.	Max.	Max.
PESD5V2S2UT,215-JSM	5	5	6	1	12	20	13	200

1. 8/20 waveform used.

ELECTRICAL CHARACTERISTICS CURVES

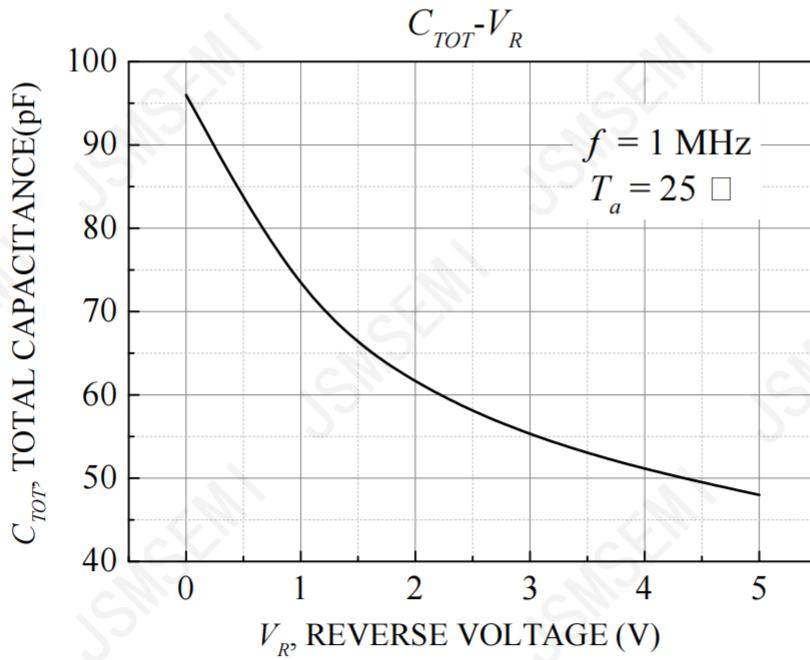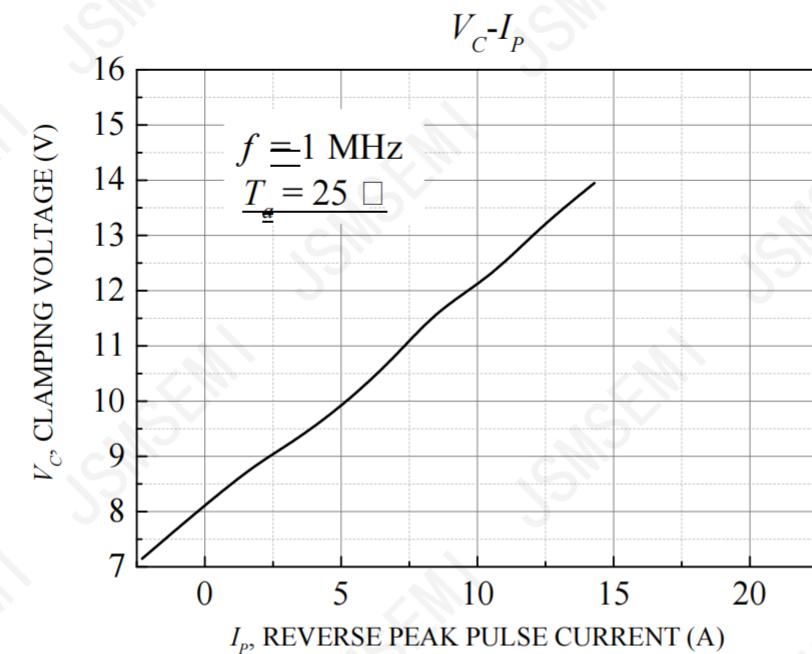

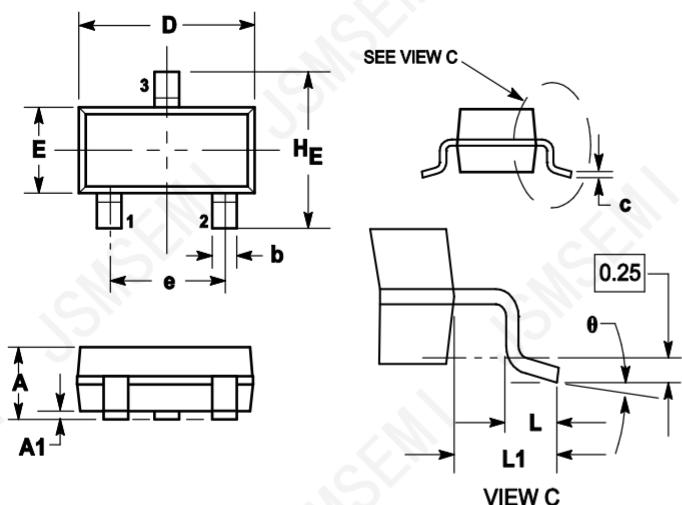


DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.89	1	1.11	0.035	0.04	0.044
A1	0.01	0.06	0.1	0.001	0.002	0.004
b	0.37	0.44	0.5	0.015	0.018	0.02
c	0.09	0.13	0.18	0.003	0.005	0.007
D	2.80	2.9	3.04	0.11	0.114	0.12
E	1.20	1.3	1.4	0.047	0.051	0.055
e	1.78	1.9	2.04	0.07	0.075	0.081
L	0.10	0.2	0.3	0.004	0.008	0.012
L1	0.35	0.54	0.69	0.014	0.021	0.029
H _E	2.10	2.4	2.64	0.083	0.094	0.104
θ	0°	---	10°	0°	---	10°

Notes:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.

SOLDERING FOOTPRINT

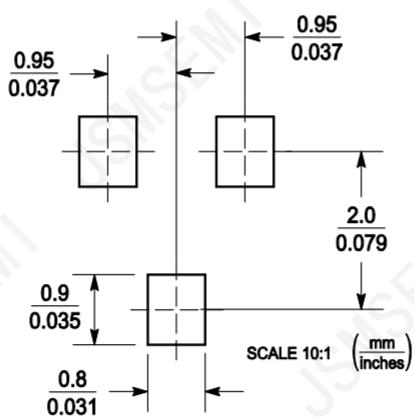

Revision History

Rev.	Change	Date
V1.0	Initial version	2/23/2024

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER'S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements different from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or service. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com