

PRODUCT CHARACTERISTICS


V_{DSS}	-60V
$R_{DS(ON)} Typ(@V_{GS}=-10V)$	24m Ω
$R_{DS(ON)} Typ(@V_{GS}=-4.5V)$	31m Ω
I_D	-50A

APPLICATIONS

- * Electronic lamp ballasts based on half bridge
- * Load Switching, Quick/Wireless Charge.
- * Motor Driving

FEATURE

- * Low Gate Charge
- * Pb-Free Lead Plating



TO-252

ORDER INFORMATION

Order Codes		Package	Packing
Halogen-Free	Halogen		
N/A	MOT50P06D	TO-252	2500 pieces/Reel

ABSOLUTE MAXIMUM RATINGS($T_A=25^{\circ}C$, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DSS}	-60	V
Gate-Source Voltage	V_{GSS}	± 20	V
Drain Current Continuous($@V_{GS}=-10V, T_A=25^{\circ}C$)	I_D	-50	A
Drain Current Continuous($@V_{GS}=-10V, T_A=100^{\circ}C$)	I_D	-30	A
Drain Current Pulsed	I_{DM}	-200	A
Avalanche Energy *	E_{AS}	196	mJ
Power Dissipation	P_D	105	W
Junction Temperature	T_J	+150	$^{\circ}C$
Storage Temperature	T_{STG}	-55~ +150	$^{\circ}C$

THERMAL CHARACTERISTICS

Parameter	Symbol	Typ	Unit
Junction to Case	R_{thJC}	1.19	$^{\circ}C/W$

Note: * EAS condition: $T_J=25^{\circ}C, V_{DS}=30V, V_G=10V, L=0.5mH, R_g=25\Omega$

■ ELECTRICAL CHARACTERISTICS ($T_C=25^{\circ}\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Off characteristics						
Drain to Source Breakdown Voltage	V _{DSS}	V _{GS} =0V,I _D =-250μA	-60	-	-	V
Drain to Source Leakage Current	I _{DSS}	V _{DS} =-60V,V _{GS} =0V	-	-	-1	μA
Gate to Source Forward Leakage	I _{GSS(F)}	V _{GS} =+20V,V _{DS} =0V	-	-	100	nA
Gate to Source Reverse Leakage	I _{GSS(R)}	V _{GS} =-20V,V _{DS} =0V	-	-	-100	nA
On characteristics						
Drain to Source On-Resistance	R _{DS(ON)}	V _{GS} =-10V,I _D =-20A	-	24	28	mΩ
		V _{GS} =-4.5V,I _D =-20A	-	31	35	mΩ
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} =V _{GS} ,I _D =-250μA	-1	-1.8	-2.5	V
Dynamic characteristics						
Gate capacitance	R _g	V _{GS} =0V,V _{DS} =0V,f=1.0MHz	-	5.1	-	Ω
Forward Transconductance	g _{fs}	V _{DS} =-5V,I _D =-5A	-	16	-	S
Input Capacitance	C _{iss}	V _{DS} =-20V,V _{GS} =0V f=1.0MHz	-	3600	-	pF
Output Capacitance	C _{oss}		-	164	-	pF
Reverse Transfer Capacitance	C _{rss}		-	153	-	pF
Resistive Switching Characteristics						
Turn-on Delay Time	t _{d(ON)}	V _{GS} =-15V,V _{DS} =-30V, I _D =-10A,R _G =3.9Ω	-	66	-	ns
Rise Time	t _r		-	101	-	ns
Turn-off Delay Time	t _{d(OFF)}		-	465	-	ns
Fall Time	t _f		-	205	-	ns
Total Gate Charge	Q _g	I _D =-15A,V _{DS} =-30V V _{GS} =-10V	-	72	-	nC
Gate to Source Charge	Q _{gs}		-	19	-	nC
Gate to Drain("Miller") Charge	Q _{gd}		-	9.8	-	nC
Source-Drain Diode Characteristics						
Continuous Source Current(Body Diode)	I _s		-	-	-50	A
Maximum Pulsed Current(Body Diode)	I _{SM}		-	-	-200	A
Diode Forward Voltage	V _{SD}	I _{SD} =-1A,V _{GS} =0V	-	-0.74	-1.2	V
Reverse Recovery Time	t _{rr}	I _{SD} =-15A,T _J =25℃ dI/dt=100A/μs	-	25	-	ns
Reverse Recovery Charge	Q _{rr}		-	21	-	nC

■ TYPICAL CHARACTERISTICS

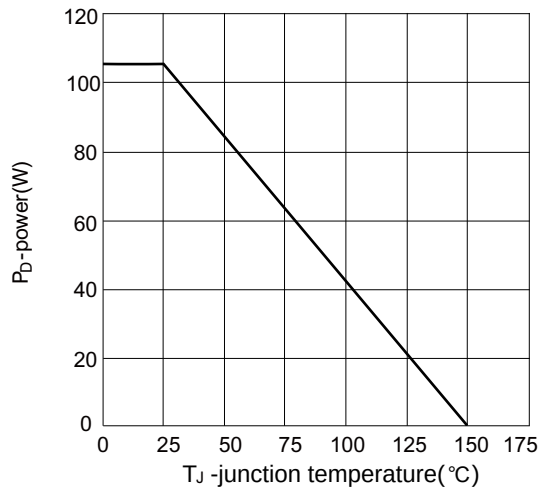


Figure 1 Power capability

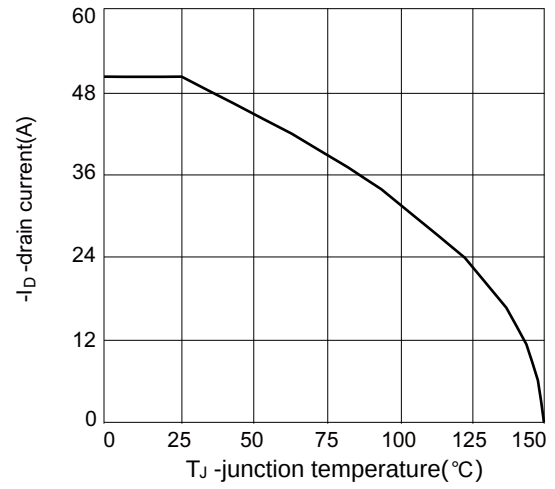


Figure 2 Current capability

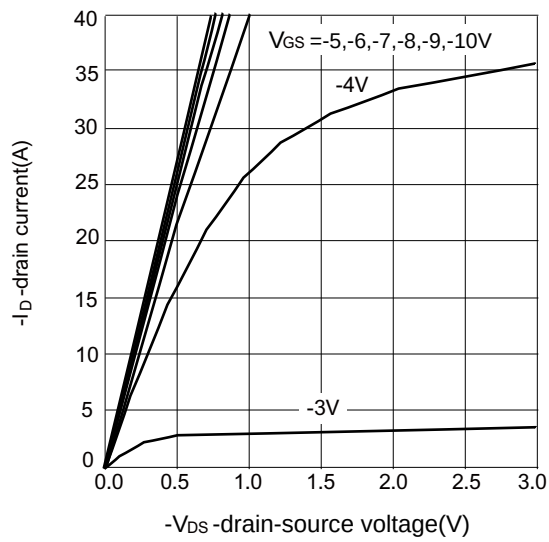


Figure 3 Output characteristics

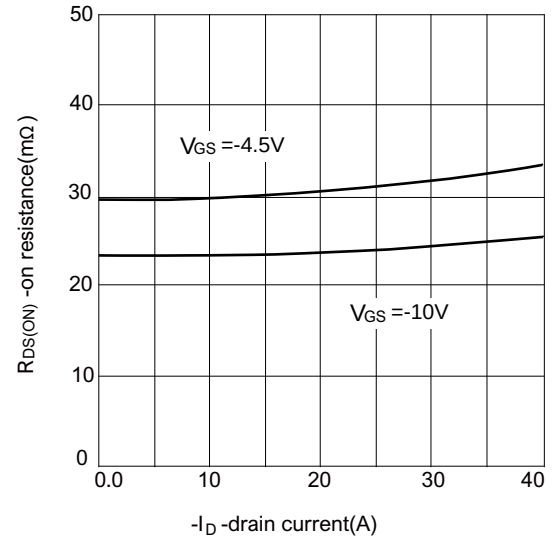


Figure 4 Drain-source on resistance

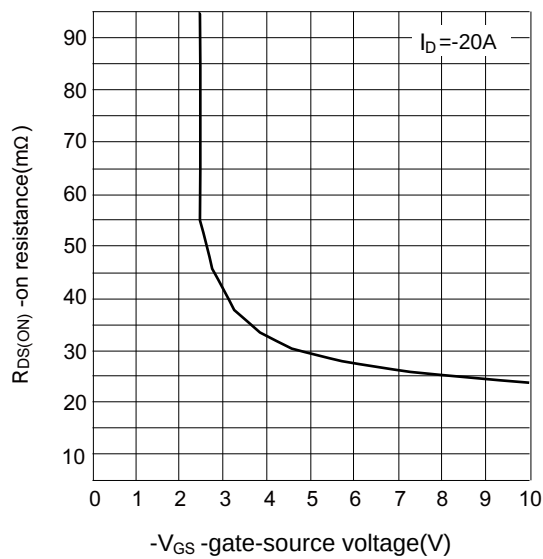


Figure 5 Transfer characteristics

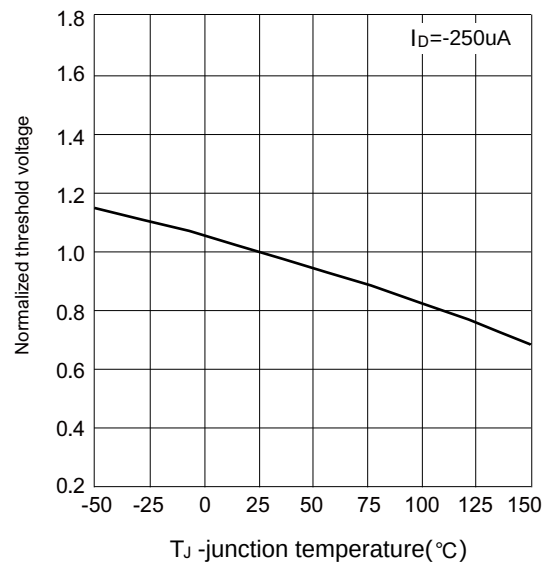


Figure 6 Normalized threshold voltage

■ TYPICAL CHARACTERISTICS(Cont.)

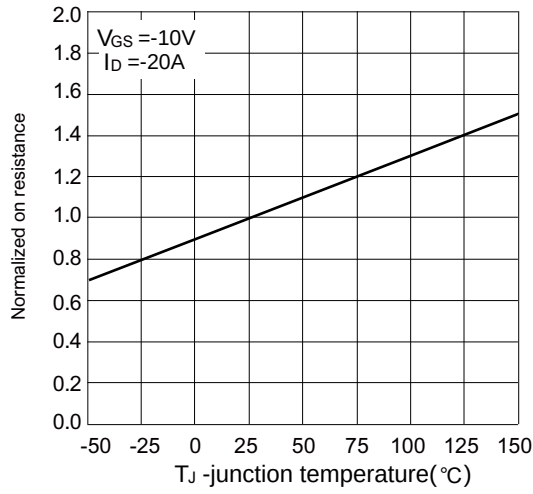


Figure 7 Normalized on resistance

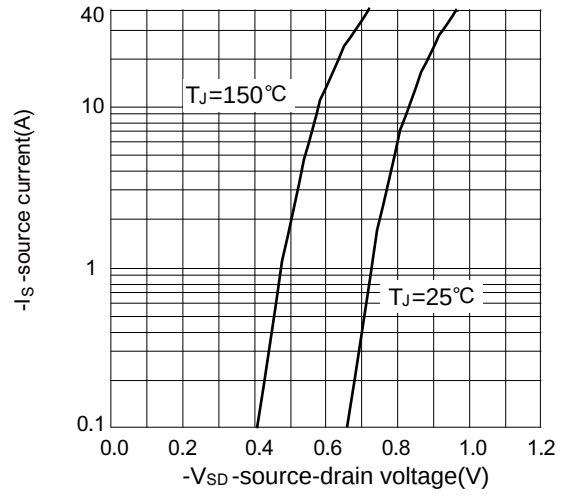


Figure 8 Diode forward current

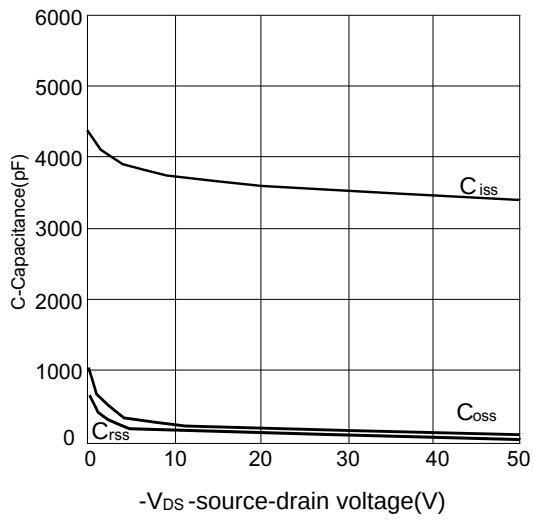


Figure 9 Capacitance

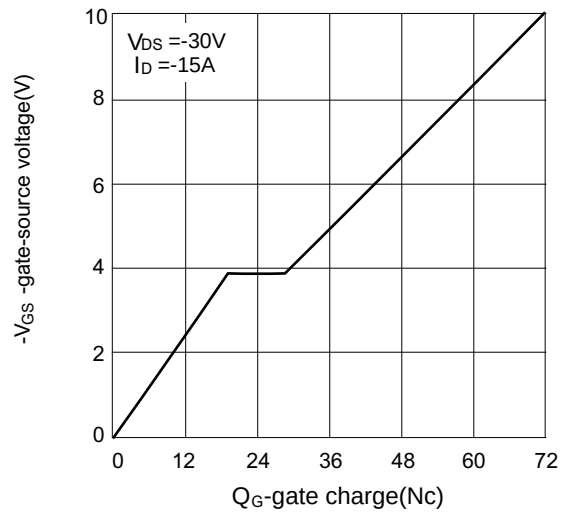


Figure 10 Gate charge

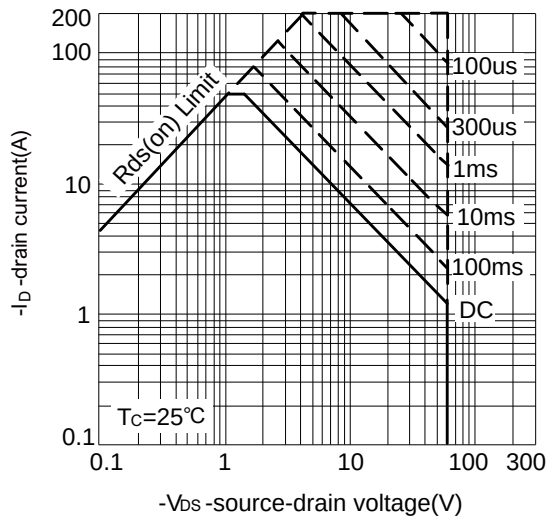


Figure 11 Safe operation area

■ TO-252 PACKAGE OUTLINE DIMENSIONS

