



# 规格书

## SPECIFICATION SHEET

Customer name : \_\_\_\_\_

BERYL SERIES : ME

TYPE : RADIAL

DESCRIPTION : 33uF/400V  $\Phi$ 13\*17

Apply date : 2023-07-20

| BERYL                        |         |          | CUSTOMER |         |          |
|------------------------------|---------|----------|----------|---------|----------|
| P/N:ME400M330LO13*17TA-1B3Et |         |          | P/N:     |         |          |
| PREPARED                     | CHECKED | APPROVAL | PREPARED | CHECKED | APPROVAL |
| 胡晓敏                          | 廖梅君     | 张业维      |          |         |          |

After approved, please sign back 1 Approval Sheet before order. If not, we will treat it as tacitly acknowledged and accepted our relative standard and technical index.

**Zhao Qing Beryl Electronic Technology Co., Ltd.**

TEL: (0758) 2862871 FAX: (0758) 2862870

E-mail: master@zq-beryl.com <http://www.zq-beryl.com>

NO.8 DUANZHOU ROAD, ZHAOQING CITY. GUANGDONG. CHINA

**Revise record**

| <b>NO.</b> | <b>Date</b>       | <b>Revise reason</b> | <b>Revise content</b> | <b>Prepared</b> |
|------------|-------------------|----------------------|-----------------------|-----------------|
| <b>01</b>  | <b>2023.07.20</b> | <b>First issue</b>   | <b>First issue</b>    | <b>胡晓敏</b>      |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |
|            |                   |                      |                       |                 |

## 1、Application

This specification applies to Aluminum electrolytic capacitor (foil type) used in electronic equipment.

Designed capacitor's quality meets IEC 60384.


## 2、Table of specification and characteristics

| Series                    | Cap(uF)<br>120Hz/20℃ | WV(V)                    | Size(mm) |                            | Temperature<br>(℃) | Capacitance<br>Tolerance       | Life(hours)<br>@105(℃) |                  |  |
|---------------------------|----------------------|--------------------------|----------|----------------------------|--------------------|--------------------------------|------------------------|------------------|--|
|                           |                      |                          | D        | L                          |                    |                                |                        |                  |  |
| ME                        | 33                   | 400                      | 13       | 17                         | -40~+105           | ±20%                           | 2000                   |                  |  |
| DF (%) (MAX)<br>120Hz/20℃ |                      | LC(μA) (MAX)<br>2min/20℃ |          | ESR(Ω) (MAX)<br>100KHz/25℃ |                    | RC (mA rms)<br>(MAX)105℃/120Hz |                        | Surge voltage(V) |  |
| ≤24                       |                      | ≤274                     |          | -                          |                    | 250                            |                        | 440              |  |

Other: /

## 3、Product Dimensions

Type

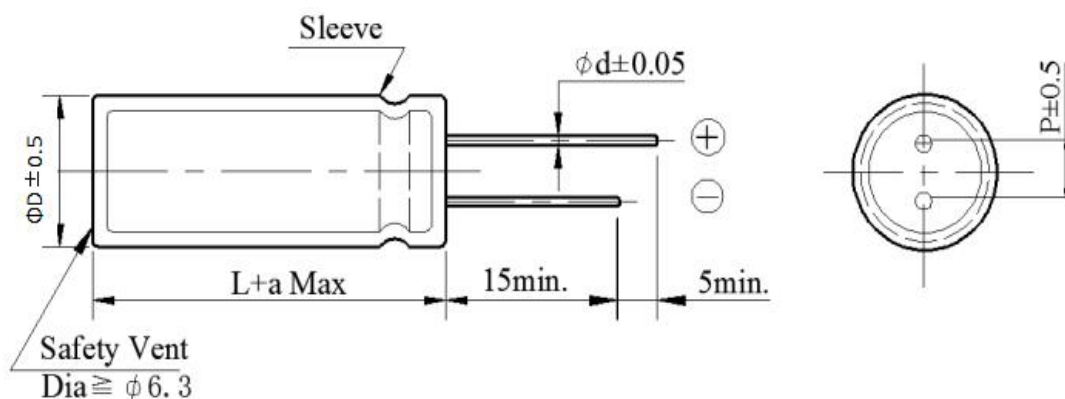

| $\Phi D$ | 5                  | 6.3 | 8       | 10  | 13                    | 16  | 18  | 22  |
|----------|--------------------|-----|---------|-----|-----------------------|-----|-----|-----|
| P        | 2                  | 2.5 | 3.5     | 5   | 5                     | 7.5 | 7.5 | 10  |
| $\Phi d$ | 0.5                | 0.5 | 0.5/0.6 | 0.6 | 0.6                   | 0.8 | 0.8 | 0.8 |
| a        | $(L < 20) \pm 1.5$ |     |         |     | $(L \geq 20) \pm 2.0$ |     |     |     |

## 4、Part Number

|    |     |   |     |    |       |        |   |   |
|----|-----|---|-----|----|-------|--------|---|---|
| ME | 400 | M | 330 | LO | 13*17 | TA-1B3 | E | t |
|----|-----|---|-----|----|-------|--------|---|---|

t=date code(week)

Material PET

Sleeve colour

Size:D\*L

TYPE CODE DESCRIPTION:  
LO Long Lead


RATED CAPACITANCE: 330=33uF

CAPACITANCE TOLERANCE:M=±20%

RATED VOLTAGE: 400=400V

SERIES NAME


## 5、Construction

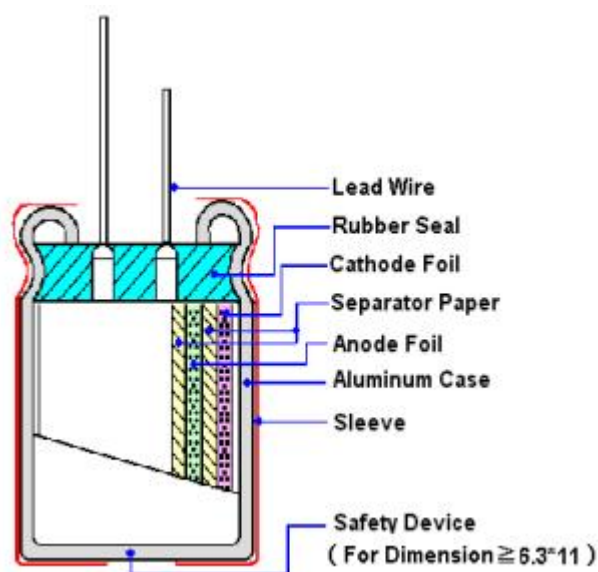

| Material name | Composition                         | Supplier name        |
|---------------|-------------------------------------|----------------------|
| Lead          | Al and (Fe+Cu+Sn)                   | NM、RH、ZY             |
| Rubber        | IIR                                 | LHX、TH               |
| Case          | Aluminum                            | OX、YJ、LY2、SH         |
| Paper         | Wood / Fibrous plant materials      | KE、CY                |
| Anode foil    | Al + Al <sub>2</sub> O <sub>3</sub> | HY1、HY2、HF、HX1、GD、FC |
| Cathode foil  | Aluminum                            | GY、FL、TL             |
| Electrolyte   | Glycol + Water + Ammonium salt      | XZB、JZ2              |
| Sleeve        | PET                                 | YL、CY                |
| Adhesive tape | propylene , butyl acrylate          | RK、RB、CW             |

## 6、Product Marking

### Marking Sample:

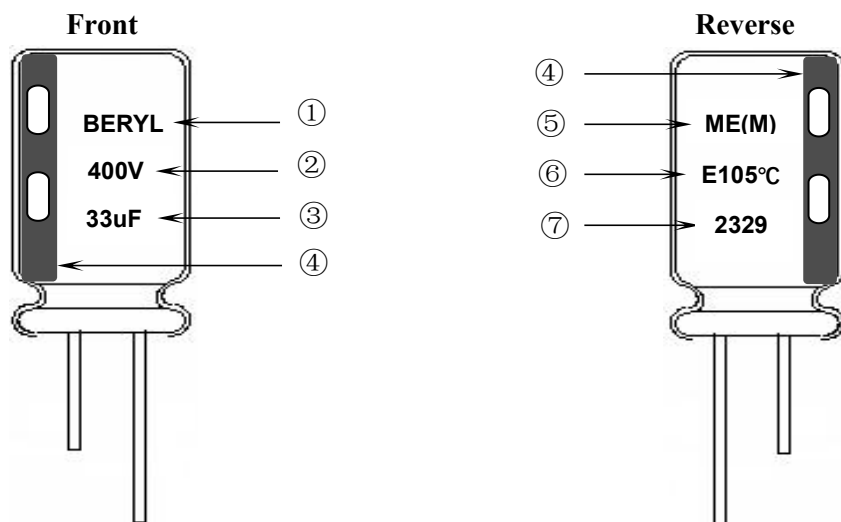

### Marking Details:

Capacitor shall be marked the following items:

- 1) Trademark (BERYL)
- 2) working voltage(400V)
- 3) Nominal capacitance(33uF)
- 4) Cathode marked
- 5) Series symbol & Nominal capacitance tolerance (M: -20% ~ +20%)
- 6) Sleeve material(E: PET)  
Maximum operating temperature(105°C)

- 7) Date code (2329)

23: Manufactured year 2023

|      |      |      |      |      |      |      |      |      |       |
|------|------|------|------|------|------|------|------|------|-------|
| Code | 19   | 20   | 21   | 22   | 23   | 24   | 25   | 26   | ..... |
| Year | 2019 | 2020 | 2021 | 2022 | 2023 | 2024 | 2025 | 2026 | ..... |

29: Manufactured week (01、02、03、04.....52、53)

## 7、Characteristics

### Standard atmospheric conditions

Unless other specified, the standard range of atmospheric conditions for making measurements and tests is as follows:

Ambient temperature : 15°C to 35°C

Relative humidity : 45% to 85%

Air pressure : 86kPa to 106kPa

If there is any doubt about the results, measurement shall be made within the following conditions:

Ambient temperature : 20°C ± 2°C


Relative humidity : 60% to 70%

Air pressure : 86kPa to 106kPa

### Operating temperature range

The ambient temperature range at which the capacitor can be operated continuously at rated voltage is (6.3~400WV) -40°C to +105°C. (450WV)-25°C to +105°C.


**Table**
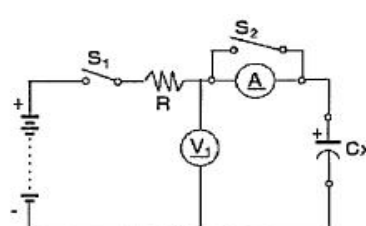
| ITEM |                                 | PERFORMANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | Nominal capacitance (Tolerance) | <p>&lt;Condition&gt;<br/>           Measuring Frequency: 120Hz±12Hz<br/>           Measuring circuit: Series equivalent circuit<br/>           Measuring Voltage: Not more than 0.5Vrms +1.5~2.0V.DC<br/>           Measuring Temperature: 20±2°C</p> <p>&lt;Criteria&gt;<br/>           Shall be within the specified capacitance tolerance.</p>                                                                                                                                                                       |
| 2    | Leakage current                 | <p>&lt;Condition&gt;<br/>           Connecting the capacitor with a protective resistor (1kΩ±10Ω) in series for 2 minutes, and then, measure leakage current.</p> <p>&lt;Criteria&gt;<br/>           I: Leakage current (μA)<br/> <math>I (\mu A) \leq 0.02CV + 10(\mu A)</math>,<br/>           measurement circuit refer to right drawing.<br/>           C: Capacitance (μF)<br/>           V: Rated DC working voltage (V)</p>  |
| 3    | Dissipation factor              | <p>&lt;Condition&gt;<br/>           Nominal capacitance, for measuring frequency, voltage and temperature.</p> <p>&lt;Criteria&gt;<br/>           Must be within the parameters (See page 3)</p>                                                                                                                                                                                                                                                                                                                        |

| ITEM               |                                                               | PERFORMANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |                                           |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
|--------------------|---------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------------|--------------------|-------------------------------|--------------------|-------------------------------------------|------------|-------------------------------------------|--|--|--|--|--|--|----|------|------|------|------|------|------|------------------|----|----|----|-----|--------|------|------|------|------|
| 4                  | Impedance                                                     | <p>&lt;Condition&gt;<br/>Measuring frequency:100kHz; Measuring temperature:20±2°C<br/>Measuring point: 2mm max. from the surface of a sealing rubber on the lead wire.</p> <p>&lt;Criteria&gt;<br/>(20°C) Must be within the parameters (See page 3)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |                                           |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| 5                  | Load life test                                                | <p>&lt;Condition&gt;<br/>According to IEC60384-4No. 4.13 methods, the capacitor is stored at a temperature of Maximum operating temperature ±2°C with DC bias voltage plus the rated ripple current for Rated life +48/0hours. (The sum of DC and ripple peak voltage shall not exceed the rated working voltage) Then the product should be tested after 16 hours recovering time at atmospheric conditions. The result should meet the following table:</p> <p>&lt;Criteria&gt;<br/>The characteristic shall meet the following requirements.</p> <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Capacitance Change</td><td>Within ±20% of initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than 200%of the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table> | Leakage current | Not more than the specified value.        | Capacitance Change | Within ±20% of initial value. | Dissipation Factor | Not more than 200%of the specified value. | Appearance | There shall be no leakage of electrolyte. |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| Leakage current    | Not more than the specified value.                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |                                           |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| Capacitance Change | Within ±20% of initial value.                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |                                           |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| Dissipation Factor | Not more than 200%of the specified value.                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |                                           |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| Appearance         | There shall be no leakage of electrolyte.                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |                                           |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| 6                  | Shelf life test                                               | <p>&lt;Condition&gt;<br/>The capacitors are then stored with no voltage applied at a temperature of Maximum operating temperature±2°C for1000+48/0 hours. Following this period, the capacitors shall be removed from the test chamber and be allowed to stabilized at room temperature for16 hours. measure leakage current</p> <p>&lt;Criteria&gt;<br/>The characteristic shall meet the following requirements.</p> <table><tr><td>Leakage current</td><td>Not more than 200%of the specified value.</td></tr><tr><td>Capacitance Change</td><td>Within ±20% of initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than 200%of the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table>                                                                                                                       | Leakage current | Not more than 200%of the specified value. | Capacitance Change | Within ±20% of initial value. | Dissipation Factor | Not more than 200%of the specified value. | Appearance | There shall be no leakage of electrolyte. |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| Leakage current    | Not more than 200%of the specified value.                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |                                           |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| Capacitance Change | Within ±20% of initial value.                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |                                           |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| Dissipation Factor | Not more than 200%of the specified value.                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |                                           |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| Appearance         | There shall be no leakage of electrolyte.                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |                                           |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| 7                  | Maximum permissible (ripple current, temperature coefficient) | <p>&lt;Condition&gt;<br/>The maximum permissible ripple current is the maximum A.C current at 120Hz and can be applied at maximum operating temperature<br/>Table-3<br/>The combined value of D.C voltage and the peak A.C voltage shall not exceed the rated voltage and shall not reverse voltage.</p> <p><b>Frequency Multipliers:</b></p> <table><tr><td>Freq (Hz)</td><td>50</td><td>120</td><td>300</td><td>1k</td><td>10k</td><td>100k</td></tr><tr><td>Cap. (μF)</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>33</td><td>0.75</td><td>1.00</td><td>1.25</td><td>1.50</td><td>1.75</td><td>1.80</td></tr></table> <p><b>Temperature Coefficient:</b></p> <table><tr><td>Temperature (°C)</td><td>60</td><td>85</td><td>95</td><td>105</td></tr><tr><td>Factor</td><td>2.23</td><td>1.73</td><td>1.41</td><td>1.00</td></tr></table>                          | Freq (Hz)       | 50                                        | 120                | 300                           | 1k                 | 10k                                       | 100k       | Cap. (μF)                                 |  |  |  |  |  |  | 33 | 0.75 | 1.00 | 1.25 | 1.50 | 1.75 | 1.80 | Temperature (°C) | 60 | 85 | 95 | 105 | Factor | 2.23 | 1.73 | 1.41 | 1.00 |
| Freq (Hz)          | 50                                                            | 120                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 300             | 1k                                        | 10k                | 100k                          |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| Cap. (μF)          |                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |                                           |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| 33                 | 0.75                                                          | 1.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1.25            | 1.50                                      | 1.75               | 1.80                          |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| Temperature (°C)   | 60                                                            | 85                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 95              | 105                                       |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |
| Factor             | 2.23                                                          | 1.73                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1.41            | 1.00                                      |                    |                               |                    |                                           |            |                                           |  |  |  |  |  |  |    |      |      |      |      |      |      |                  |    |    |    |     |        |      |      |      |      |

| ITEM                  |                                           | PERFORMANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------------------|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------------------------------|-----------------------|-------------------------------|--------------------|------------------------------------|------------|-------------------------------------------|-----------------------------------|-----|------|-----------------------------------|---|-------|-----------------------------------|---|------|-----------------------------------|-------------|-----|----|----|----|----|----|----|-----|---------|-----|-----|-----|-----|---------------|----|---|---|---|---|---|---|---|---|---|---|---|---|
| 8                     | Terminal strength                         | <p>&lt;Condition&gt;</p> <p>Tensile strength of terminals<br/>Fixed the capacitor, applied force to the terminal in lead out direction for30+5-0 seconds. Bending strength of terminals.<br/>Fixed the capacitor, applied force to bent the terminal (1~4 mm from the rubber) for 90° within 2~3 seconds, and then bent it for 90° to its original position within 2~3 seconds.</p> <table><tr><td>Diameter of lead wire</td><td>Tensile force N (kgf)</td><td>Bending force N (kgf)</td></tr><tr><td>0.5mm and less</td><td>5 (0.51)</td><td>2.5 (0.25)</td></tr><tr><td>0.6~0.8 mm</td><td>10 (1.02)</td><td>5 (0.51)</td></tr></table> <p>&lt;Criteria&gt;</p> <p>No noticeable changes shall be found, no breakage or looseness at the terminal.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Diameter of lead wire | Tensile force N (kgf)              | Bending force N (kgf) | 0.5mm and less                | 5 (0.51)           | 2.5 (0.25)                         | 0.6~0.8 mm | 10 (1.02)                                 | 5 (0.51)                          |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| Diameter of lead wire | Tensile force N (kgf)                     | Bending force N (kgf)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| 0.5mm and less        | 5 (0.51)                                  | 2.5 (0.25)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| 0.6~0.8 mm            | 10 (1.02)                                 | 5 (0.51)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| 9                     | Temperature characteristics               | <p>&lt;Condition&gt;</p> <table><tr><td>STEP</td><td>Testing temperature (°C)</td><td>Time</td></tr><tr><td>1</td><td>20±2</td><td>Time to reach thermal equilibrium</td></tr><tr><td>2</td><td>-40 -25±3</td><td>Time to reach thermal equilibrium</td></tr><tr><td>3</td><td>20±2</td><td>Time to reach thermal equilibrium</td></tr><tr><td>4</td><td>105±2</td><td>Time to reach thermal equilibrium</td></tr><tr><td>5</td><td>20±2</td><td>Time to reach thermal equilibrium</td></tr></table> <p>Capacitance, DF, and impedance shall be measured at 120Hz.</p> <p>&lt;Criteria&gt;</p> <p>a. At +105°C, capacitance measured at +20°C shall be within ±25% of its original value.<br/>Dissipation factor shall be within the limit of Item 7.3<br/>The leakage current measured shall not more than 10 times of its specified value.</p> <p>b. In step 5, capacitance measured at +20°C shall be within ±10% of its original value.<br/>Dissipation factor shall be within the limit of Item 7.3<br/>The leakage current shall not more than the specified value.</p> <p>c. At- 40°C , Impedance (Z) ratio shall not exceed the value of the following table.</p> <table><tr><td>Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td><td>160~200</td><td>250</td><td>350</td><td>400</td><td>450</td></tr><tr><td>Z-40°C/Z+20°C</td><td>10</td><td>8</td><td>6</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>4</td><td>4</td><td>6</td><td>6</td><td>6</td></tr></table> | STEP                  | Testing temperature (°C)           | Time                  | 1                             | 20±2               | Time to reach thermal equilibrium  | 2          | -40 -25±3                                 | Time to reach thermal equilibrium | 3   | 20±2 | Time to reach thermal equilibrium | 4 | 105±2 | Time to reach thermal equilibrium | 5 | 20±2 | Time to reach thermal equilibrium | Voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 | 160~200 | 250 | 350 | 400 | 450 | Z-40°C/Z+20°C | 10 | 8 | 6 | 4 | 3 | 3 | 3 | 3 | 4 | 4 | 6 | 6 | 6 |
| STEP                  | Testing temperature (°C)                  | Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| 1                     | 20±2                                      | Time to reach thermal equilibrium                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| 2                     | -40 -25±3                                 | Time to reach thermal equilibrium                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| 3                     | 20±2                                      | Time to reach thermal equilibrium                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| 4                     | 105±2                                     | Time to reach thermal equilibrium                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| 5                     | 20±2                                      | Time to reach thermal equilibrium                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| Voltage (V)           | 6.3                                       | 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 16                    | 25                                 | 35                    | 50                            | 63                 | 100                                | 160~200    | 250                                       | 350                               | 400 | 450  |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| Z-40°C/Z+20°C         | 10                                        | 8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 6                     | 4                                  | 3                     | 3                             | 3                  | 3                                  | 4          | 4                                         | 6                                 | 6   | 6    |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| 10                    | Surge test                                | <p>&lt;Condition&gt;</p> <p>Applied a surge voltage to the capacitor connected with a (100 ±50)/CR (kΩ) resistor in series for 30±5 seconds in every 5±0.5 minutes at 15~35°C.Procedure shall be repeated 1000 times. Then the capacitors shall be left under normal humidity for 1-2 hours before measurement<br/>CR : Nominal Capacitance (μF)</p> <p>&lt;Criteria&gt;</p> <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Capacitance Change</td><td>Within ±15% of initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table> <p>Attention:</p> <p>This test simulates over voltage at abnormal situation only. It is not applicable to such over voltage as often applied.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Leakage current       | Not more than the specified value. | Capacitance Change    | Within ±15% of initial value. | Dissipation Factor | Not more than the specified value. | Appearance | There shall be no leakage of electrolyte. |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| Leakage current       | Not more than the specified value.        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| Capacitance Change    | Within ±15% of initial value.             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| Dissipation Factor    | Not more than the specified value.        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |
| Appearance            | There shall be no leakage of electrolyte. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                       |                                    |                       |                               |                    |                                    |            |                                           |                                   |     |      |                                   |   |       |                                   |   |      |                                   |             |     |    |    |    |    |    |    |     |         |     |     |     |     |               |    |   |   |   |   |   |   |   |   |   |   |   |   |

| ITEM                                      |                                                | PERFORMANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
|-------------------------------------------|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------|--------------------|------------------------------------------------|-------------------------------------------|--------------------------------------------|-------------------------------------|-------------------------------------------|------------------------------------|--|-----------------|------------------------------------|--------------------|------------------------------------|------------|-------------------------------------------|
| 11                                        | Change of temperature test                     | <p><b>&lt;Condition&gt;</b><br/>Temperature cycle:<br/>According to IEC60384-4 No.4.7 methods, capacitor shall be placed in an oven, the condition according as below:</p> <table><tr><th>Temperature</th><th>Time</th></tr><tr><td>(1) +20°C</td><td>3 Minutes</td></tr><tr><td>(2) Rated low temperature (- 40°C)(-25°C)</td><td>30±2 Minutes</td></tr><tr><td>(3) Rated high temperature (+105°C)</td><td>30±2 Minutes</td></tr><tr><td colspan="2">(1) to (3) =1 cycle, total 5 cycle</td></tr></table> <p><b>&lt;Criteria&gt;</b><br/>The characteristic shall meet the following requirement.</p> <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table> | Temperature            | Time                               | (1) +20°C          | 3 Minutes                                      | (2) Rated low temperature (- 40°C)(-25°C) | 30±2 Minutes                               | (3) Rated high temperature (+105°C) | 30±2 Minutes                              | (1) to (3) =1 cycle, total 5 cycle |  | Leakage current | Not more than the specified value. | Dissipation Factor | Not more than the specified value. | Appearance | There shall be no leakage of electrolyte. |
| Temperature                               | Time                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| (1) +20°C                                 | 3 Minutes                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| (2) Rated low temperature (- 40°C)(-25°C) | 30±2 Minutes                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| (3) Rated high temperature (+105°C)       | 30±2 Minutes                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| (1) to (3) =1 cycle, total 5 cycle        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| Leakage current                           | Not more than the specified value.             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| Dissipation Factor                        | Not more than the specified value.             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| Appearance                                | There shall be no leakage of electrolyte.      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| 12                                        | Damp heat test                                 | <p><b>&lt;Condition&gt;</b><br/>Humidity test:<br/>According to IEC60384-4 No.4.12 methods, capacitor shall be exposed for 500±8 hours in an atmosphere of 90~95%R H .at 40±2°C, the characteristic change shall meet the following requirement.</p> <p><b>&lt;Criteria&gt;</b></p> <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Capacitance Change</td><td>Within ±10% of initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than 120% of the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table>                                                                                                                                                                                                                                   | Leakage current        | Not more than the specified value. | Capacitance Change | Within ±10% of initial value.                  | Dissipation Factor                        | Not more than 120% of the specified value. | Appearance                          | There shall be no leakage of electrolyte. |                                    |  |                 |                                    |                    |                                    |            |                                           |
| Leakage current                           | Not more than the specified value.             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| Capacitance Change                        | Within ±10% of initial value.                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| Dissipation Factor                        | Not more than 120% of the specified value.     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| Appearance                                | There shall be no leakage of electrolyte.      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| 13                                        | Solderability test                             | <p><b>&lt;Condition&gt;</b><br/>The capacitor shall be tested under the following conditions:<br/>Soldering temperature : 245 ±5°C<br/>Dipping depth : 2mm<br/>Dipping speed : 25±2.5mm/s<br/>Dipping time : 3±0.5s</p> <p><b>&lt;Criteria&gt;</b></p> <table><tr><td>Soldering wetting time</td><td>Less than 3s</td></tr><tr><td>Coating quality</td><td>A minimum of 95% of the surface being immersed</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                                                      | Soldering wetting time | Less than 3s                       | Coating quality    | A minimum of 95% of the surface being immersed |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| Soldering wetting time                    | Less than 3s                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
| Coating quality                           | A minimum of 95% of the surface being immersed |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                                    |                    |                                                |                                           |                                            |                                     |                                           |                                    |  |                 |                                    |                    |                                    |            |                                           |
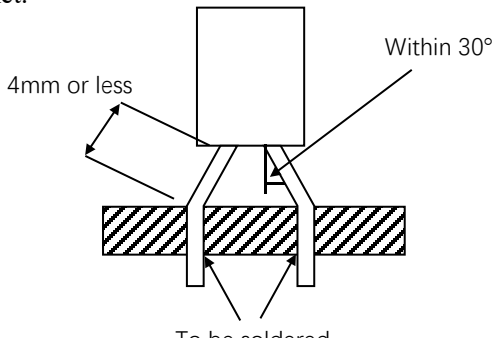
| ITEM               |                                                                                                                     | PERFORMANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                    |                                                                                                  |                    |                                                                                                                     |                    |                                    |            |                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------|--------------------|------------------------------------|------------|-------------------------------------------|
| 14                 | Vibration test                                                                                                      | <p><b>&lt;Condition&gt;</b><br/>The following conditions shall be applied for 2 hours in each 3 mutually perpendicular directions. Vibration frequency range : 10Hz ~ 55Hz<br/>each to peak amplitude : 1.5mm<br/>Sweep rate : 10Hz ~ 55Hz ~ 10Hz in about 1 minute<br/>Mounting method: The capacitor with diameter greater than 12.5mm or longer than 25mm must be fixed in place with a bracket.</p> <div></div> <p><b>&lt;Criteria&gt;</b><br/>After the test, the following items shall be tested:</p> <table><tr><td>Inner construction</td><td>No intermittent contacts, open or short circuiting.<br/>No damage of tab terminals or electrodes.</td></tr><tr><td>Appearance</td><td>No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible.</td></tr></table> | Inner construction | No intermittent contacts, open or short circuiting.<br>No damage of tab terminals or electrodes. | Appearance         | No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible. |                    |                                    |            |                                           |
| Inner construction | No intermittent contacts, open or short circuiting.<br>No damage of tab terminals or electrodes.                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |                                                                                                  |                    |                                                                                                                     |                    |                                    |            |                                           |
| Appearance         | No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |                                                                                                  |                    |                                                                                                                     |                    |                                    |            |                                           |
| 15                 | Resistance to solder heat test                                                                                      | <p><b>&lt;Condition&gt;</b><br/>Terminals of the capacitor shall be immersed into solder bath at 260±5°C for 10±1 seconds or 400±10°C for 3~0 seconds to 1.5~2.0 mm from the body of capacitor. Then the capacitor shall be left under the normal temperature and normal humidity for 1~2 hours before measurement.</p> <p><b>&lt;Criteria&gt;</b></p> <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Capacitance Change</td><td>Within ±5% of initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table>                                                                                                                                                                                                                            | Leakage current    | Not more than the specified value.                                                               | Capacitance Change | Within ±5% of initial value.                                                                                        | Dissipation Factor | Not more than the specified value. | Appearance | There shall be no leakage of electrolyte. |
| Leakage current    | Not more than the specified value.                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |                                                                                                  |                    |                                                                                                                     |                    |                                    |            |                                           |
| Capacitance Change | Within ±5% of initial value.                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |                                                                                                  |                    |                                                                                                                     |                    |                                    |            |                                           |
| Dissipation Factor | Not more than the specified value.                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |                                                                                                  |                    |                                                                                                                     |                    |                                    |            |                                           |
| Appearance         | There shall be no leakage of electrolyte.                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |                                                                                                  |                    |                                                                                                                     |                    |                                    |            |                                           |
| 16                 | Vent test                                                                                                           | <p><b>&lt;Condition&gt;</b><br/>The following test only apply to those products with vent products at diameter ≥Ø6.3 with vent.<br/>D.C. test<br/>The capacitor is connected with its polarity reversed to a DC power source. Then a current selected from Table 2 is applied.</p> <p><b>&lt;Table 2&gt;</b></p> <table><tr><td>Diameter (mm)</td><td>DC Current (A)</td></tr><tr><td>22.4 or less</td><td>1</td></tr></table> <p><b>&lt;Criteria&gt;</b><br/>The vent shall operate with no dangerous conditions such as flames or dispersion of pieces of the capacitor and/or case.</p>                                                                                                                                                                                                                                                                                                                          | Diameter (mm)      | DC Current (A)                                                                                   | 22.4 or less       | 1                                                                                                                   |                    |                                    |            |                                           |
| Diameter (mm)      | DC Current (A)                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |                                                                                                  |                    |                                                                                                                     |                    |                                    |            |                                           |
| 22.4 or less       | 1                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |                                                                                                  |                    |                                                                                                                     |                    |                                    |            |                                           |

## 8、 Packing Information


Packing Label Marked (the following items shall be marked on the label)

(Inside box or bag)


(1)Client order number (2)Client part number (3)Beryl part number (4)Capacitance (5)Voltage (6)Dimension (7)Packaging quantity (8)Capacitance tolerance (9) QC Marking (10) Lot number (11) Series

LOT Number :


12 34 56 78910

  
 year month date number

### 1) Bulk Packing:

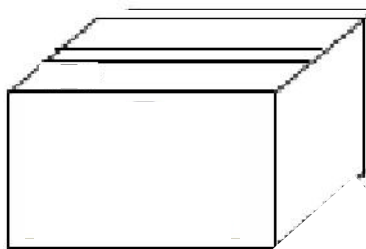

### 2) Taped Packing:

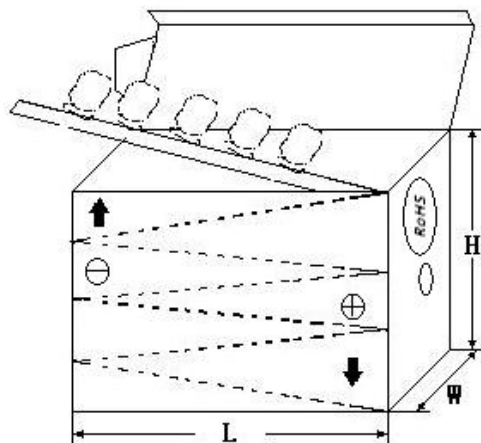

### 3) Outer box



外箱

### 4) Outer box label:

|                                                       |  |        |  |                                                                                       |
|-------------------------------------------------------|--|--------|--|---------------------------------------------------------------------------------------|
| BERYL Zhao Qing Beryl Electronic Technology Co., Ltd. |  |        |  |  |
| C.S.R:                                                |  |        |  |                                                                                       |
| C.S.R P/O:                                            |  |        |  |                                                                                       |
| C.S.R P/N:                                            |  |        |  | QC                                                                                    |
| S.P.R P/N:                                            |  |        |  |                                                                                       |
| SPEC:                                                 |  |        |  |                                                                                       |
| QTY: PCS                                              |  | TOL: % |  |                                                                                       |
| L/N:                                                  |  | S.P.R: |  |                                                                                       |

## 9、Prohibition to Use Environment- related Substances

We are hereby to certify the followings:

Our company hereby warrants and guarantees that all or part of products, including, but not limited to, the peripherals, accessories or package, delivered to your company (including your subsidiaries and affiliated companies) directly or indirectly by our company are free from any of the substances listed below.

The latest version of <Substances Prohibited as per RoHS or <Sony-SS-00259>

|                                         |                                      |
|-----------------------------------------|--------------------------------------|
| Accord with heavy metal                 | Cadmium and cadmium compounds        |
|                                         | Lead and lead compounds              |
|                                         | Mercury and mercury compounds        |
|                                         | Hexavalent chromium compounds        |
| Organic chlorin compounds               | Polychlorinated biphenyls (PCB)      |
|                                         | Polychlorinated naphthalenes (PCN)   |
|                                         | Polychlorinated terphenyls (PCT)     |
|                                         | Chlorinated paraffins (CP)           |
|                                         | Other chlorinated organic compounds  |
| Organic bromine compounds               | Polybrominated biphenyls (PBB)       |
|                                         | Polybrominated diphenylethers (PBDE) |
|                                         | Other brominated organic compounds   |
| Tributyltin compounds                   |                                      |
| Triphenyltin compounds                  |                                      |
| Asbestos                                |                                      |
| Specific azo compounds                  |                                      |
| Formaldehyde                            |                                      |
| Polyvinyl chloride (PVC) and PVC blends |                                      |
| F、Cl、Br、I                               |                                      |
| REACH                                   |                                      |