


## Features

- ◆ 70W (8x20us) Peak Pulse Power
- ◆ Low Clamping Voltage
- ◆ SOD-323 Package
- ◆ RoHS Compliant
- ◆ Matte Tin Lead finish (Pb-Free)
- ◆ Protect One I/O or Power Line
- ◆ Meet IEC61000-4-2 Level 4:  
     Contact Discharge > 20kV  
     Air Discharge > 20kV



Circuit Diagram



PIN Diagram

## Applications

- ◆ Smart Phones
- ◆ Laptop Computers
- ◆ Portable Electronics

## Ordering information

| Device      | Package | Qty / Reel |
|-------------|---------|------------|
| PESD5V0V1BA | SOD-323 | 3000       |

**MAXIMUM RATINGS (  $T_a=25^{\circ}\text{C}$  unless otherwise noted )**

| Parameter                                              | Symbol                 | Limit      | Unit               |
|--------------------------------------------------------|------------------------|------------|--------------------|
| IEC 61000-4-2 ESD Voltage                              | $V_{\text{ESD}}^{(1)}$ | $\pm 20$   | kV                 |
| Air Model                                              |                        |            |                    |
| Contact Model                                          |                        | $\pm 20$   |                    |
| JESD22-A114-B ESD Voltage                              |                        | $\pm 16$   |                    |
| ESD Voltage                                            | Machine Model          | $\pm 0.4$  |                    |
| Peak Pulse Power                                       | $P_{\text{PP}}^{(2)}$  | 70         | W                  |
| Peak Pulse Current                                     | $I_{\text{PP}}^{(2)}$  | 5          | A                  |
| Lead Solder Temperature – Maximum (10 Second Duration) | $T_L$                  | 260        | $^{\circ}\text{C}$ |
| Junction Temperature                                   | $T_j$                  | 150        | $^{\circ}\text{C}$ |
| Storage Temperature Range                              | $T_{\text{stg}}$       | -55 ~ +150 | $^{\circ}\text{C}$ |

(1).Device stressed with ten non-repetitive ESD pulses.


(2).Non-repetitive current pulse 8/20 $\mu\text{s}$  exponential decay waveform according to IEC61000-4-5.

**ESD standards compliance**
**IEC61000-4-2 Standard**


| Contact Discharge |                 | Air Discharge |                 |
|-------------------|-----------------|---------------|-----------------|
| Level             | Test Voltage kV | Level         | Test Voltage kV |
| 1                 | 2               | 1             | 2               |
| 2                 | 4               | 2             | 4               |
| 3                 | 6               | 3             | 8               |
| 4                 | 8               | 4             | 15              |

**JESD22-A114-B Standard**

| ESD Class | Human Body Discharge V |
|-----------|------------------------|
| 0         | 0~249                  |
| 1A        | 250~499                |
| 1B        | 500~999                |
| 1C        | 1000~1999              |
| 2         | 2000~3999              |
| 3A        | 4000~7999              |
| 3B        | 8000~15999             |

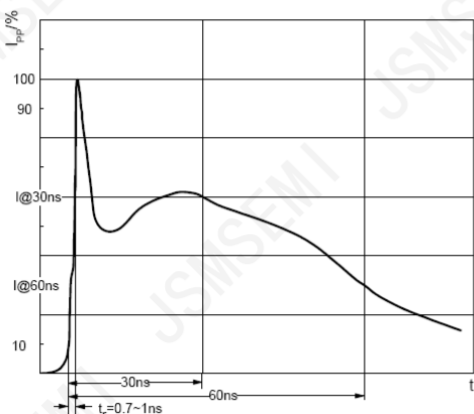


ESD pulse waveform according to IEC61000-4-2

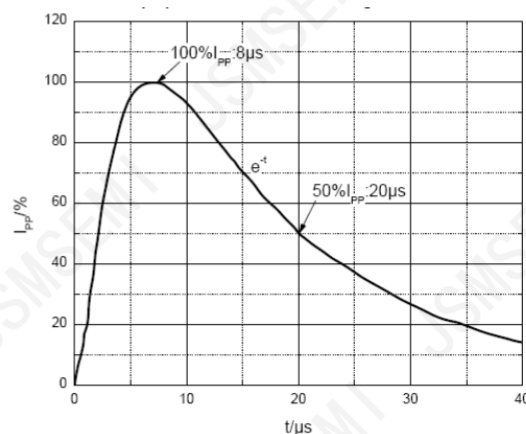

8/20 $\mu\text{s}$  pulse waveform according to IEC 61000-4-5

**ELECTRICAL PARAMETER**

| Symbol    | Parameter                           |
|-----------|-------------------------------------|
| $V_C$     | Clamping Voltage @ $I_{PP}$         |
| $I_{PP}$  | Peak Pulse Current                  |
| $V_{BR}$  | Breakdown Voltage @ $I_T$           |
| $I_T$     | Test Current                        |
| $I_R$     | Reverse Leakage Current @ $V_{RWM}$ |
| $V_{RWM}$ | Reverse Standoff Voltage            |

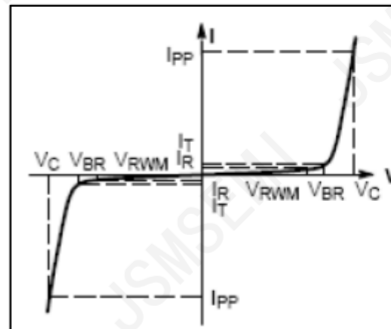

V-I characteristics for a Bi-directional TVS



**ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$  unless otherwise specified)**

| Parameter                 | Symbol          | Test conditions         | Min | Typ | Max | Unit          |
|---------------------------|-----------------|-------------------------|-----|-----|-----|---------------|
| Reverse stand off voltage | $V_{RWM}^{(1)}$ |                         |     |     | 5   | V             |
| Reverse leakage current   | $I_R$           | $V_{RWM}=5V$            |     |     | 0.1 | $\mu\text{A}$ |
| Breakdown voltage         | $V_{(BR)}$      | $I_T=1\text{mA}$        | 6   |     | 9   | V             |
| Clamping voltage          | $V_C^{(2)}$     | $I_{PP}=5A$             |     |     | 15  | V             |
| Junction capacitance      | $C_J$           | $V_R=0V, f=1\text{MHz}$ |     | 10  | 15  | pF            |

(1). Other voltages available upon request.


 (2). Non-repetitive current pulse 8/20 $\mu\text{s}$  exponential decay waveform according to IEC61000-4-5

TYPICAL CHARACTERISTICS

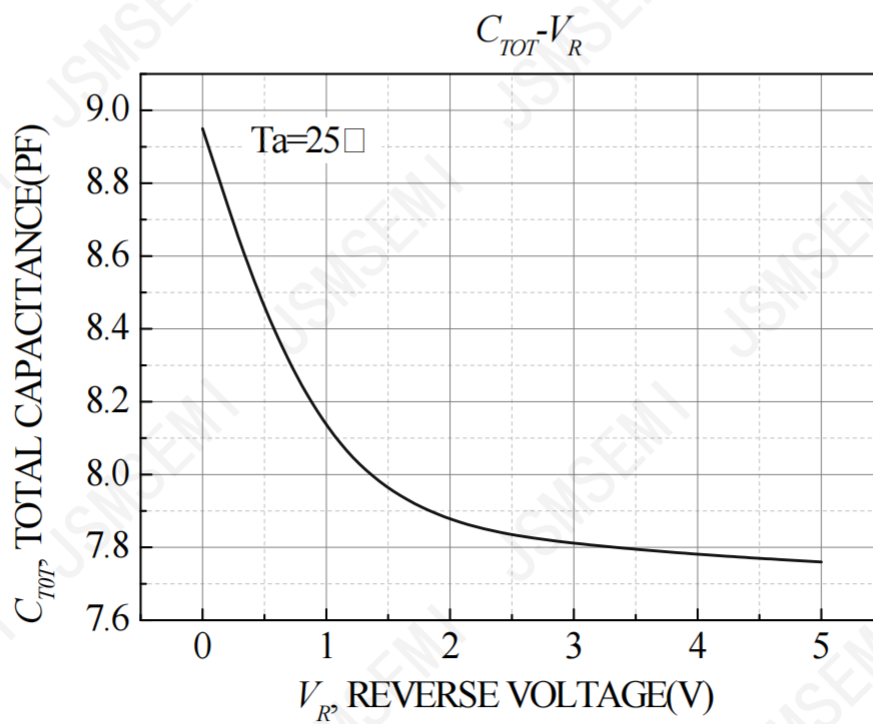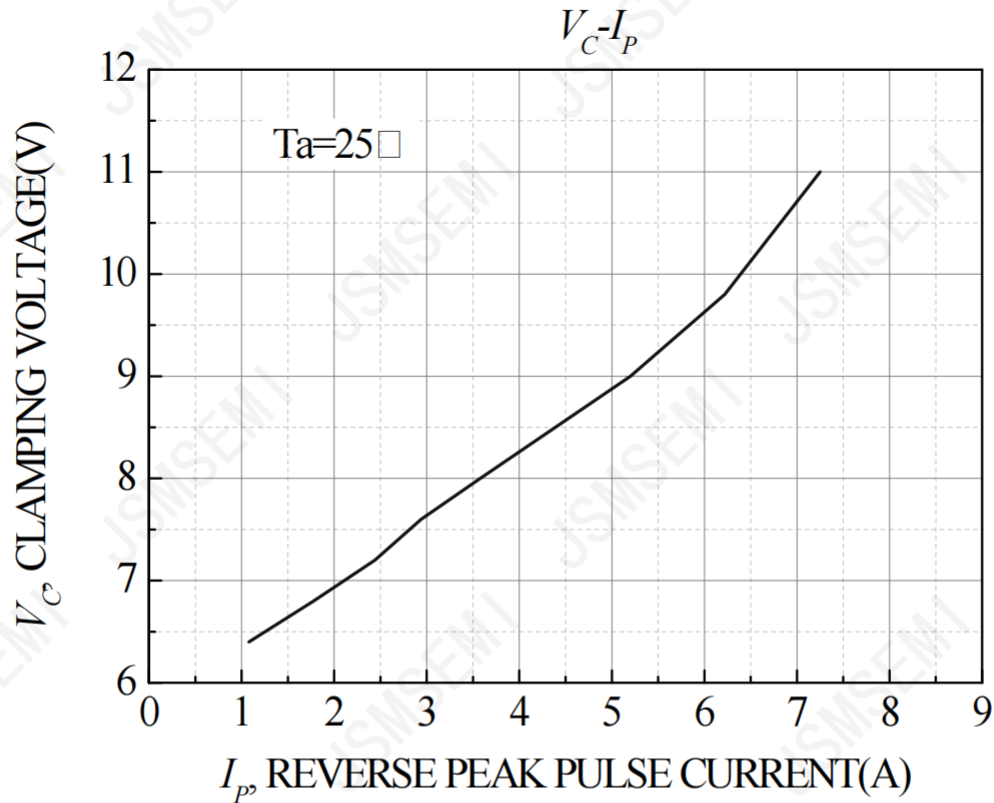


## PACKAGE OUTLINE AND PAD LAYOUT INFORMATION

### SOD-323 Package Outline Dimensions

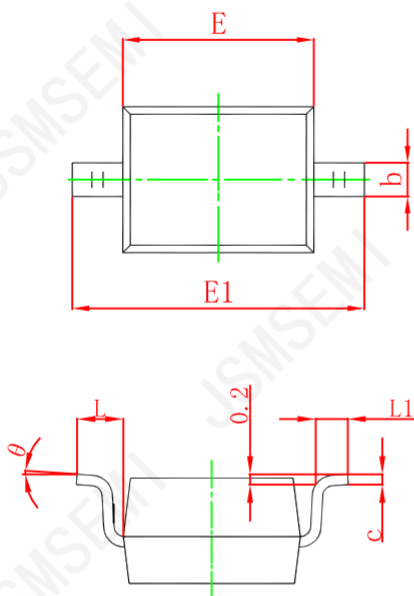

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min.                      | Max.  | Min.                 | Max.  |
| A      |                           | 1.000 |                      | 0.039 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 0.800                     | 0.900 | 0.031                | 0.035 |
| b      | 0.250                     | 0.350 | 0.010                | 0.014 |
| c      | 0.080                     | 0.150 | 0.003                | 0.006 |
| D      | 1.200                     | 1.400 | 0.047                | 0.055 |
| E      | 1.600                     | 1.800 | 0.063                | 0.071 |
| E1     | 2.550                     | 2.750 | 0.100                | 0.108 |
| L      | 0.475 REF.                |       | 0.019 REF.           |       |
| L1     | 0.250                     | 0.400 | 0.010                | 0.016 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

### SOD-323 Suggested Pad Layout

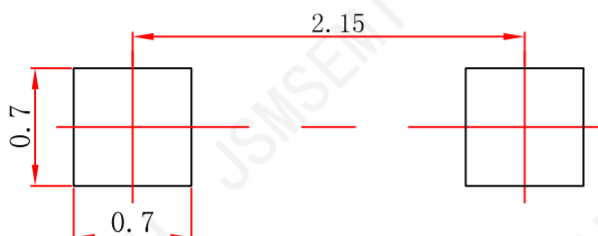

**Note:**

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

## Revision History

| Rev. | Change          | Date      |
|------|-----------------|-----------|
| V1.0 | Initial version | 2/23/2024 |
|      |                 |           |

## Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com