



FEATURES

- * Ideal for surface mount applications
- * Easy pick and place
- * Built-in strain relief
- * High surge current capability

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated, solderable per MIL-STD-202F, method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any


VOLTAGE RANGE

2000 Volts

CURRENT

1.0 Ampere

DO-214AC(SMA)

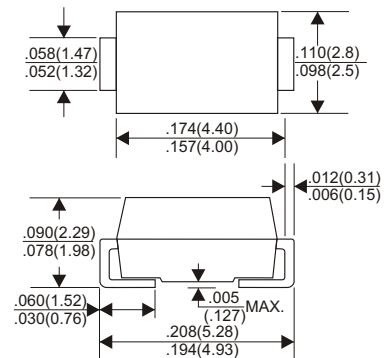

Absolute Maximum Ratings Ta = 25°C

Parameter	Symbols	M20A	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	2000	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	1	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	30	A
Maximum Instantaneous Forward Voltage at 1 A	V_F	1.15	V
Maximum Reverse Current	I_R	5 50	μA
Typical Junction Capacitance ¹⁾	C_j	20	pF
Typical Thermal Resistance ²⁾	$R_{\theta JA}$	95	°C/W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150	°C

Measured at 1 MHz and applied reverse voltage of 4 V D.C
P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.

RATING AND CHARACTERISTIC CURVES (M20A)

Fig.1 Forward Current Derating Curve

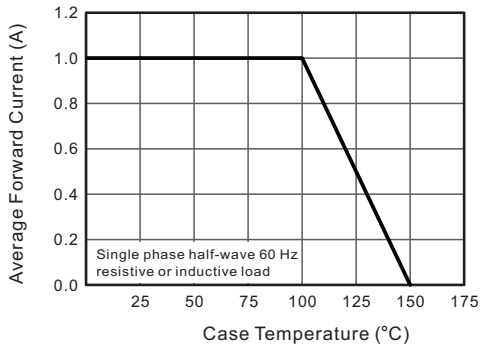


Fig.2 Typical Reverse Characteristics

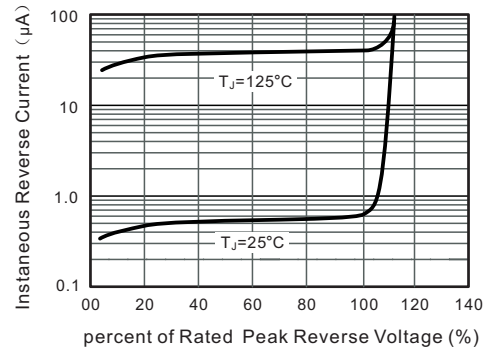


Fig.3 Typical Instantaneous Forward Characteristics

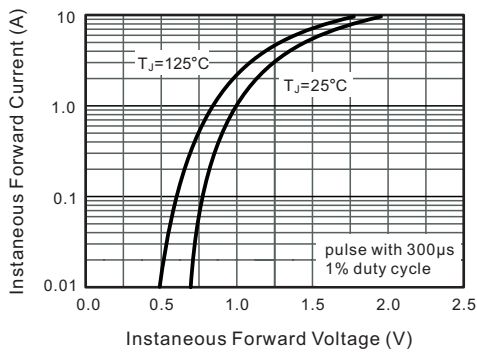


Fig.4 Typical Junction Capacitance

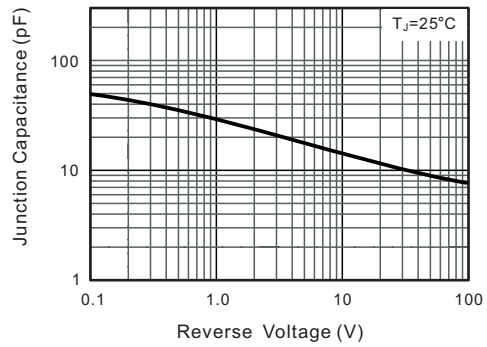


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

