



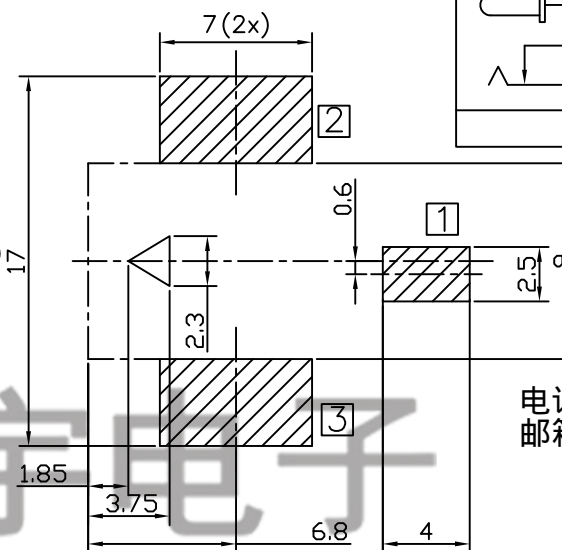

Model No		
PIN	ø2.0	ø2.5

Technical drawing of a mechanical assembly showing a cross-section of a bracket (5) and a pin (6). Dimensions include a total height of 15.2, a top flange width of 6.8, a central slot width of 4.6 (2x), a pin diameter of 1.8, and a pin length of 0.6. A dashed line indicates the center of gravity.

RECOMMENDED P. C. B. LAYOUT
UNSPECIFIED TOLERANCE: ± 0.05

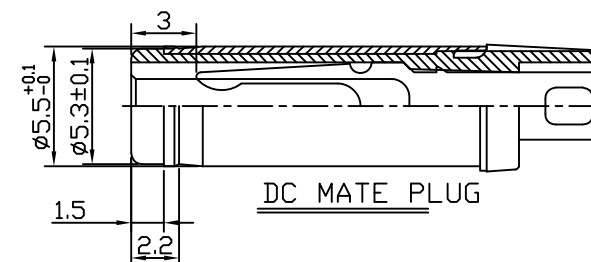

DC MATE PLUG

☐ : **TERMINAL NO.**

					TOLERANCE UNLESS SPECIFIED									
⑥	Shunt terminal	☐	Brass	1	Silver plated	UP TO 5mm:±0.1	ANGULAR	A0	2022.5.9	首次发行			ZLK	GYW
⑤	Tip spring	☐	Phosphor bronze	1	Silver plated	ABOVE 5mm:±0.2	±1°	NO	DATE	REVISIONS			BY	APPD
④	Center pin terminal	☐	Brass	1	Silver plated	TITLE: DC POWER JACK			UNIT : MM		ROHS	DWN		
③	Center pin	☐	Brass	1	Nickel plated	MODEL: DC-088D-2.5			SCALE: 1:1		COMPLIANT	CHK'D		
②	Cover		PA9T	1	Black	 HAOYU(HONGKONG)LIMITED 皓 宇(香 港)有 限 公 司					APPD			
①	Housing		PA9T	1	Black						PRO.AGL:  		REV:A0	
NO.	PART	NAME	MATERIAL	QTY	FINISHING									