


# High Current Ferrite Chip Bead(Lead Free)


HCB1005KF-600T20

## 1. Features

1. Monolithic inorganic material construction.
2. Low DC resistance structure of electrode to prevent wasteful electric power consumption.
3. Closed magnetic circuit avoids crosstalk.
4. Suitable for flow and reflow soldering.
5. Shapes and dimensions follow E.I.A. spec.
6. Available in various sizes.
7. Excellent solderability and heat resistance.
8. High reliability.
9. This component is compliant with RoHS legislation and also support lead-free soldering.

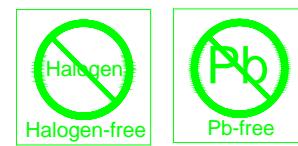

## 2. Dimensions

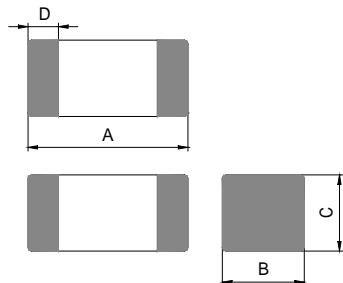


| Chip Size |           |
|-----------|-----------|
| A         | 1.00±0.10 |
| B         | 0.50±0.10 |
| C         | 0.50±0.10 |
| D         | 0.25±0.10 |

Units: mm

## 3. Part Numbering

HCB 1005 KF - 600 T 20


A: Series  
 B: Dimension L x W  
 C: Material Lead Free Material  
 D: Impedance 600=60  
 E: Packaging T=Taping and Reel, B=Bulk(Bags)  
 F: Rated Current 20=2000mA

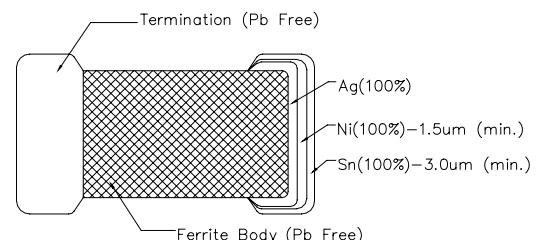



## 4. Specification

| Tai-Tech Part Number | Impedance ( ) | Test Frequency (Hz) | DC Resistance ( ) max. | Rated Current (mA) max. |
|----------------------|---------------|---------------------|------------------------|-------------------------|
| HCB1005KF-600T20     | 60±25%        | 60mV/100M           | 0.10                   | 2000                    |

■ Impedance-Frequency Characteristics

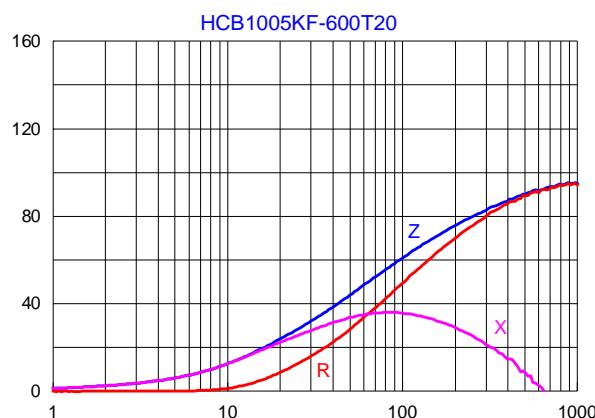


## 5. Reliability and Test Condition
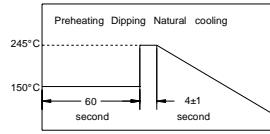
| Item                   | Performance                                                                                                                                |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     | Test Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----|-------------------------------------------------------------------------------------|----------------------------------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|-----------|------|-------------|-----|------|-------------|-----|---------|-------------|-----|------|-------------|-----|------|-----|--|------|-----|--|------|-----|--|------|-------------|-----|------|-------------|-----------|------|-----|-----|
| Series No.             | FCB                                                                                                                                        | FCM       | HCB | HPB                                                                                 | HFB                                          | FCA | FCI                                                                                                                                          | FHI | FCH | HCI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Operating Temperature  | -55~+125<br>(Including self-temperature rise)                                                                                              |           |     |                                                                                     | -40~+85<br>(Including self-temperature rise) |     |                                                                                                                                              |     | --  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Storage Temperature    | -55~+125                                                                                                                                   |           |     |                                                                                     | -40~+85                                      |     |                                                                                                                                              |     | --  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Impedance (Z)          | Refer to standard electrical characteristics list                                                                                          |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     | HP4291A, HP4287A+16092A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Inductance (Ls)        |                                                                                                                                            |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Q Factor               |                                                                                                                                            |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| DC Resistance          |                                                                                                                                            |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Rated Current          |                                                                                                                                            |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     | **                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Temperature Rise Test  | 30 max. ( T )                                                                                                                              |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     | 1. Applied the allowed DC current.<br>2. Temperature measured by digital surface thermometer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Solder heat Resistance | Appearance: No significant abnormality.<br>Impedance change: Within $\pm 30\%$ .                                                           |           |     | No mechanical damage.<br>Remaining terminal electrode: 70% min.                     |                                              |     | Preheat: 150 ,60sec.<br>Solder: Sn-Ag3.0-Cu0.5<br>Solder tamperature: 260 $\pm$ 5<br>Flux for lead free: rosin<br>Dip time: 10 $\pm$ 0.5sec. |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Solderability          | More than 90% of the terminal electrode should be covered with solder.                                                                     |           |     |  |                                              |     | Preheat: 150 ,60sec.<br>Solder: Sn-Ag3.0-Cu0.5<br>Solder tamperature: 245 $\pm$ 5<br>Flux for lead free: rosin<br>Dip time: 4 $\pm$ 1sec.    |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Terminal strength      | The terminal electrode and the dielectric must not be damaged by the forces applied on the right conditions.                               |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     | For FCB FCM HCB HPB HFB<br>FCI FHI FCH HCI:<br><table> <thead> <tr> <th>Size</th> <th>Force (Kgf)</th> <th>Time(sec)</th> </tr> </thead> <tbody> <tr> <td>1005</td> <td>0.2</td> <td></td> </tr> <tr> <td>1608</td> <td>0.5</td> <td></td> </tr> <tr> <td>2012</td> <td>0.6</td> <td></td> </tr> <tr> <td>3216</td> <td>1.0</td> <td>&gt;25</td> </tr> <tr> <td>3225</td> <td>1.0</td> <td></td> </tr> <tr> <td>4516</td> <td>1.0</td> <td></td> </tr> <tr> <td>4532</td> <td>1.5</td> <td></td> </tr> <tr> <td>5750</td> <td>2.0</td> <td></td> </tr> </tbody> </table> For FCA:<br><table> <thead> <tr> <th>Size</th> <th>Force (Kgf)</th> <th>Time(sec)</th> </tr> </thead> <tbody> <tr> <td>3216</td> <td>0.5</td> <td>&gt;25</td> </tr> </tbody> </table> | Size | Force (Kgf) | Time(sec) | 1005 | 0.2         |     | 1608 | 0.5         |     | 2012    | 0.6         |     | 3216 | 1.0         | >25 | 3225 | 1.0 |  | 4516 | 1.0 |  | 4532 | 1.5 |  | 5750 | 2.0         |     | Size | Force (Kgf) | Time(sec) | 3216 | 0.5 | >25 |
| Size                   | Force (Kgf)                                                                                                                                | Time(sec) |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 1005                   | 0.2                                                                                                                                        |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 1608                   | 0.5                                                                                                                                        |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 2012                   | 0.6                                                                                                                                        |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 3216                   | 1.0                                                                                                                                        | >25       |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 3225                   | 1.0                                                                                                                                        |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 4516                   | 1.0                                                                                                                                        |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 4532                   | 1.5                                                                                                                                        |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 5750                   | 2.0                                                                                                                                        |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Size                   | Force (Kgf)                                                                                                                                | Time(sec) |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 3216                   | 0.5                                                                                                                                        | >25       |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Flexure strength       | The terminal electrode and the dielectric must not be damaged by the forces applied on the right conditions.                               |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     | <br>Solder a chip on a test substrate, bend the substrate by 2mm (0.079in)and return.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Bending Strength       | The ferrite should not be damaged by Forces applied on the right condition.                                                                |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     | <table> <thead> <tr> <th>Size</th> <th>mm(inches)</th> <th>P-Kgf</th> </tr> </thead> <tbody> <tr> <td>1608</td> <td>0.80(0.033)</td> <td>0.3</td> </tr> <tr> <td>2012</td> <td>1.40(0.055)</td> <td>1.0</td> </tr> <tr> <td>FCA3216</td> <td>2.00(0.079)</td> <td>1.5</td> </tr> <tr> <td>3216</td> <td>2.00(0.079)</td> <td>2.5</td> </tr> <tr> <td>3225</td> <td></td> <td></td> </tr> <tr> <td>4516</td> <td></td> <td></td> </tr> <tr> <td>4532</td> <td></td> <td></td> </tr> <tr> <td>5750</td> <td>2.70(0.106)</td> <td>2.5</td> </tr> </tbody> </table>                                                                                                                                                                                                | Size | mm(inches)  | P-Kgf     | 1608 | 0.80(0.033) | 0.3 | 2012 | 1.40(0.055) | 1.0 | FCA3216 | 2.00(0.079) | 1.5 | 3216 | 2.00(0.079) | 2.5 | 3225 |     |  | 4516 |     |  | 4532 |     |  | 5750 | 2.70(0.106) | 2.5 |      |             |           |      |     |     |
| Size                   | mm(inches)                                                                                                                                 | P-Kgf     |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 1608                   | 0.80(0.033)                                                                                                                                | 0.3       |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 2012                   | 1.40(0.055)                                                                                                                                | 1.0       |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| FCA3216                | 2.00(0.079)                                                                                                                                | 1.5       |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 3216                   | 2.00(0.079)                                                                                                                                | 2.5       |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 3225                   |                                                                                                                                            |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 4516                   |                                                                                                                                            |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 4532                   |                                                                                                                                            |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| 5750                   | 2.70(0.106)                                                                                                                                | 2.5       |     |                                                                                     |                                              |     |                                                                                                                                              |     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |
| Random Vibration Test  | Appearance: Cracking, shedding and any other defects harmful to the characteristics should not be allowed.<br>Impedance: within $\pm 30\%$ |           |     |                                                                                     |                                              |     |                                                                                                                                              |     |     | Frequency: 10-55-10Hz for 1 min.<br>Amplitude: 1.52mm<br>Directions and times: X, Y, Z directions for 2 hours.<br>A period of 2 hours in each of 3 mutually perpendicular directions (Total 6 hours).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |             |           |      |             |     |      |             |     |         |             |     |      |             |     |      |     |  |      |     |  |      |     |  |      |             |     |      |             |           |      |     |     |

| Item                         | Performance                                                                                                                                                                                                                      | Test Condition                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Loading at High Temperature  | Appearance: no damage.<br>Impedance: within $\pm$ 30% of initial value.<br>Inductance: within $\pm$ 10% of initial value.<br>Q: within $\pm$ 30% of initial value. (FCI FHI FCH)<br>Q: within $\pm$ 20% of initial value. (HCl ) | Temperature: 125 $\pm$ 5 (bead), 85 $\pm$ 5 (inductor)<br>Applied current: rated current.<br>Duration: 1008 $\pm$ 12hrs.<br>Measured at room temperature after placing for 2 to 3 hrs.                                                                                                                                                                                          |
| Humidity                     |                                                                                                                                                                                                                                  | Humidity: 90-95%RH.<br>Temperature: 40 $\pm$ 2 .<br>Temperature: 60 $\pm$ 2 .(HCl)<br>Duration: 1008 $\pm$ 12hrs.<br>Measured at room temperature after placing for 2 to 3 hrs.                                                                                                                                                                                                 |
| Thermal shock                | Appearance: no damage.<br>Impedance: within $\pm$ 30% of initial value.<br>Inductance: within $\pm$ 10% of initial value.<br>Q: within $\pm$ 30% of initial value. (FCI FHI FCH)<br>Q: within $\pm$ 20% of initial value. (HCl ) | For FCB FCM HCB HPB HFB FCA :<br>Condition for 1 cycle<br>Step1: -55 $\pm$ 2 30 $\pm$ 3 min.<br>Step2: +125 $\pm$ 5 30 $\pm$ 3 min.<br>Number of cycles: 5<br>For FCI FHI FCH HCl :<br>Condition for 1 cycle<br>Step1: -40 $\pm$ 2 30 $\pm$ 3 min.<br>Step2: +85 $\pm$ 5 30 $\pm$ 3 min.<br>Number of cycles: 100<br>Measured at room temperature after placing for 2 to 3 hrs. |
| Low temperature storage test |                                                                                                                                                                                                                                  | Temperature: -55 $\pm$ 2 .<br>Duration: 1008 $\pm$ 12hrs.<br>Measured at room temperature after placing for 2 to 3 hrs.                                                                                                                                                                                                                                                         |
| Drop                         | a: No mechanical damage<br>b: Impedance change: $\pm$ 30%                                                                                                                                                                        | Drop 10 times on a concrete floor from a height of 75cm                                                                                                                                                                                                                                                                                                                         |

### \*\*Derating Curve



For the ferrite chip bead which withstanding current over 1.5A, as the operating temperature over 85 , the derating current information is necessary to consider with. For the detail derating of current, please refer to the Derated Current vs. Operating Temperature curve.

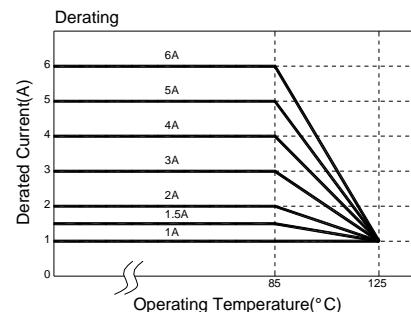

## 6. Soldering and Mounting

### 6-1. Recommended PC Board Pattern

| Chip Size |      |                |                 |                 |                 | Land Patterns For Reflow Soldering |       |       |
|-----------|------|----------------|-----------------|-----------------|-----------------|------------------------------------|-------|-------|
| Series    | Type | A(mm)          | B(mm)           | C(mm)           | D(mm)           | L(mm)                              | G(mm) | H(mm) |
| FCB       | 1005 | 1.0 $\pm$ 0.10 | 0.50 $\pm$ 0.10 | 0.50 $\pm$ 0.10 | 0.25 $\pm$ 0.10 | 2.10                               | 0.50  | 0.55  |
| FCM       | 1608 | 1.6 $\pm$ 0.15 | 0.80 $\pm$ 0.15 | 0.80 $\pm$ 0.15 | 0.30 $\pm$ 0.20 | 2.60                               | 0.60  | 0.80  |
| HCB       | 2012 | 2.0 $\pm$ 0.20 | 1.25 $\pm$ 0.20 | 0.85 $\pm$ 0.20 | 0.50 $\pm$ 0.30 | 3.00                               | 1.00  | 1.00  |
| HPB       |      | 2.0 $\pm$ 0.20 | 1.25 $\pm$ 0.20 | 1.25 $\pm$ 0.20 | 0.50 $\pm$ 0.30 |                                    |       |       |
| HFB       | 2520 | 2.5 $\pm$ 0.20 | 2.00 $\pm$ 0.20 | 1.60 $\pm$ 0.20 | 0.50 $\pm$ 0.30 | 3.90                               | 1.50  | 1.50  |
| FCI       | 3216 | 3.2 $\pm$ 0.20 | 1.60 $\pm$ 0.20 | 1.10 $\pm$ 0.20 | 0.50 $\pm$ 0.30 | 4.40                               | 2.20  | 1.40  |
| FHI       | 3225 | 3.2 $\pm$ 0.20 | 2.50 $\pm$ 0.20 | 1.30 $\pm$ 0.20 | 0.50 $\pm$ 0.30 | 4.40                               | 2.20  | 3.40  |
| FCH       | 4516 | 4.5 $\pm$ 0.20 | 1.60 $\pm$ 0.20 | 1.60 $\pm$ 0.20 | 0.50 $\pm$ 0.30 | 5.70                               | 2.70  | 1.40  |
| HCI       | 4532 | 4.5 $\pm$ 0.20 | 3.20 $\pm$ 0.20 | 1.50 $\pm$ 0.20 | 0.50 $\pm$ 0.30 | 5.90                               | 2.57  | 4.22  |
| UHI       | 5750 | 5.7 $\pm$ 0.20 | 5.00 $\pm$ 0.30 | 1.80 $\pm$ 0.20 | 0.50 $\pm$ 0.30 | 8.00                               | 4.00  | 5.80  |

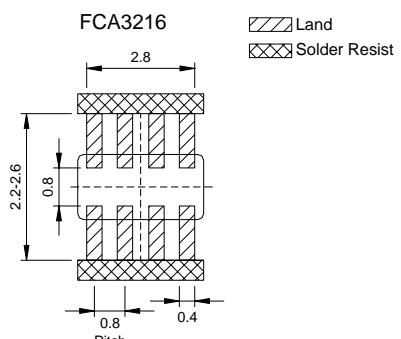

PC board should be designed so that products are not sufficient under mechanical stress as warping the board.  
Products shall be positioned in the sideway direction against the mechanical stress to prevent failure.

### 6-2. Soldering

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. The terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

**6-2.1 Lead Free Solder re-flow:**

Recommended temperature profiles for lead free re-flow soldering in Figure 1.

**6-2.2 Solder Wave:**

Wave soldering is perhaps the most rigorous of surface mount soldering processes due to the steep rise in temperature seen by the circuit when immersed in the molten solder wave. Due to the risk of thermal damage to products, wave soldering of large size products is discouraged. Recommended temperature profile for wave soldering is shown in Figure 2.

**6-2.3 Soldering Iron(Figure 3):**

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

Note : Preheat circuit and products to 150  
350 tip temperature for Ferrite chip bead (max)

Never contact the ceramic with the iron tip  
1.0mm tip diameter (max)

Use a 20 watt soldering iron with tip diameter of 1.0mm  
Limit soldering time to 3 sec.

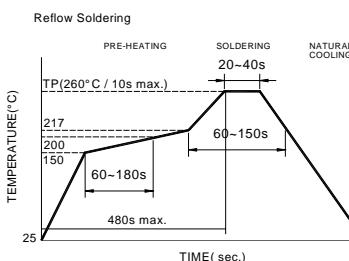


Figure 1. Re-flow Soldering(Lead Free)

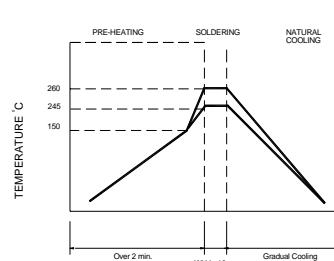


Figure 2. Wave Soldering

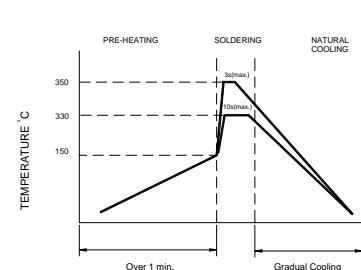
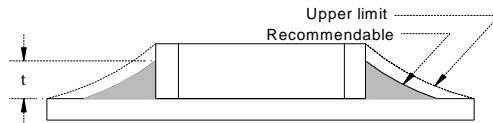
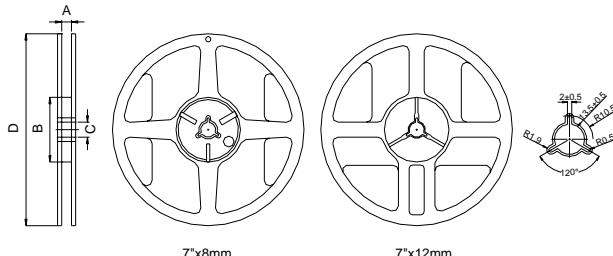


Figure 3. Hand Soldering

**6-2.4 Solder Volume:**


Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceed as shown in right side:

**7. Packaging Information****7-1. Reel Dimension**

| Type      | A(mm)    | B(mm) | C(mm)    | D(mm) |
|-----------|----------|-------|----------|-------|
| 7" x 8mm  | 9.0±0.5  | 60±2  | 13.5±0.5 | 178±2 |
| 7" x 12mm | 13.5±0.5 | 60±2  | 13.5±0.5 | 178±2 |


**7-2.1 Tape Dimension / 8mm**

Material of taping is paper

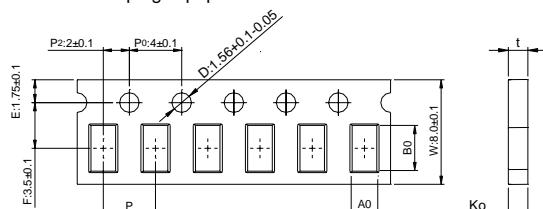


| Series      | Size   | Bo(mm)    | Ao(mm)    | Ko(mm)    | P(mm)    | t(mm)     | D1(mm) |
|-------------|--------|-----------|-----------|-----------|----------|-----------|--------|
| FCB.FCM.HCB | 100505 | 1.12±0.03 | 0.62±0.03 | 0.60±0.03 | 2.0±0.10 | 0.60±0.03 | none   |
| HPB.HFB.FCI | 160808 | 1.85±0.05 | 1.05±0.05 | 0.95±0.05 | 4.0±0.10 | 0.95±0.05 | none   |
| FHI.FCH.HCI | 201209 | 2.30±0.05 | 1.50±0.05 | 0.95±0.05 | 4.0±0.10 | 0.95±0.05 | none   |

Material of taping is plastic

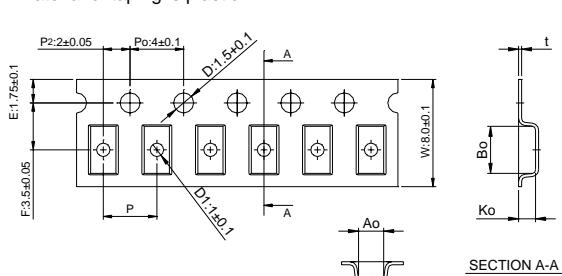

| Series  | Size   | Bo(mm)    | Ao(mm)    | Ko(mm)    | P(mm)    | t(mm)     | D1(mm)   |
|---------|--------|-----------|-----------|-----------|----------|-----------|----------|
| FCB.FCM | 160808 | 1.95±0.10 | 1.05±0.10 | 1.05±0.10 | 4.0±0.10 | 0.23±0.05 | none     |
| HCB,HPB | 201209 | 2.25±0.10 | 1.42±0.10 | 1.04±0.10 | 4.0±0.10 | 0.22±0.05 | 1.0±0.10 |
| HFB.FCI | 201212 | 2.35±0.10 | 1.50±0.10 | 1.45±0.10 | 4.0±0.10 | 0.22±0.05 | 1.0±0.10 |
| FHI.FCH | 321611 | 3.50±0.10 | 1.88±0.10 | 1.27±0.10 | 4.0±0.10 | 0.22±0.05 | 1.0±0.10 |
| HCI     | 322513 | 3.42±0.10 | 2.77±0.10 | 1.55±0.10 | 4.0±0.10 | 0.22±0.05 | 1.0±0.10 |
| FCA     | 321609 | 3.40±0.10 | 1.77±0.10 | 1.04±0.10 | 4.0±0.10 | 0.22±0.05 | 1.0±0.10 |

## 7-2.2 Tape Dimension / 12mm

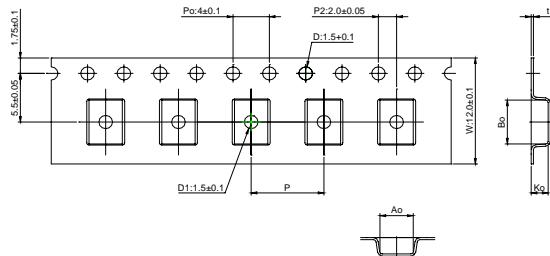


| Series          | Size   | Bo(mm)   | Ao(mm)   | Ko(mm)   | P(mm)   | t(mm)     | D1(mm)  |
|-----------------|--------|----------|----------|----------|---------|-----------|---------|
| FCB,<br>HCB.FCM | 451616 | 4.95±0.1 | 1.93±0.1 | 1.93±0.1 | 4.0±0.1 | 0.24±0.05 | 1.5±0.1 |
|                 | 453215 | 4.95±0.1 | 3.66±0.1 | 1.85±0.1 | 8.0±0.1 | 0.24±0.05 | 1.5±0.1 |
|                 | 575018 | 6.10±0.1 | 5.40±0.1 | 2.00±0.1 | 8.0±0.1 | 0.30±0.05 | 1.5±0.1 |

## 7-3. Packaging Quantity

| Chip Size   | 575018 | 453215 | 451616 | 322513 | 321611 | 201212 | 201209 | 160808 | 100505 |
|-------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Chip / Reel | 1000   | 1000   | 2000   | 2500   | 3000   | 2000   | 4000   | 4000   | 10000  |
| Inner box   | 4000   | 4000   | 8000   | 12500  | 15000  | 10000  | 20000  | 20000  | 50000  |
| Middle box  | 20000  | 20000  | 40000  | 62500  | 75000  | 50000  | 100000 | 100000 | 250000 |
| Carton      | 40000  | 40000  | 80000  | 125000 | 150000 | 100000 | 200000 | 200000 | 500000 |
| Bulk (Bags) | 7000   | 12000  | 20000  | 30000  | 50000  | 100000 | 150000 | 200000 | 300000 |

## 7-4. Tearing Off Force

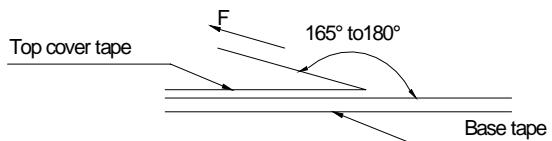

The force for tearing off cover tape is 15 to 60 grams in the arrow direction under the following conditions.

| Room Temp. ( ) | Room Humidity (%) | Room atm (hPa) | Tearing Speed mm/min |
|----------------|-------------------|----------------|----------------------|
| 5~35           | 45~85             | 860~1060       | 300                  |

Application Notice

## Storage Conditions

To maintain the solderability of terminal electrodes:

1. Temperature and humidity conditions: -10~ 40 and 30~70% RH.
2. Recommended products should be used within 6 months from the time of delivery.
3. The packaging material should be kept where no chlorine or sulfur exists in the air.

## Transportation

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.