
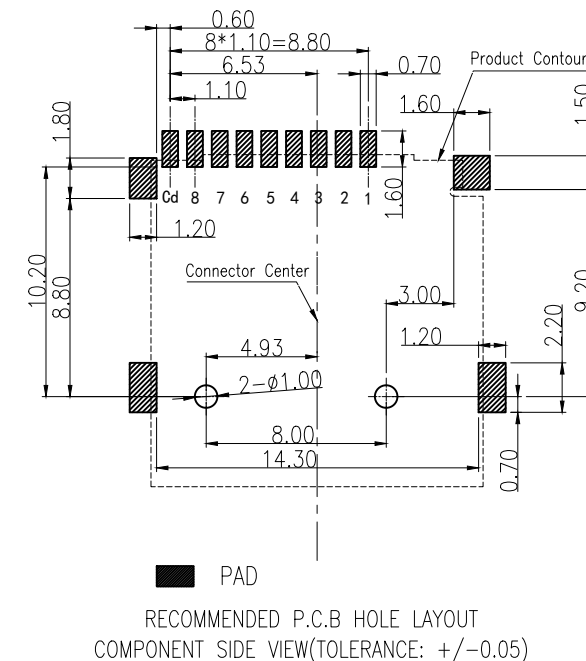
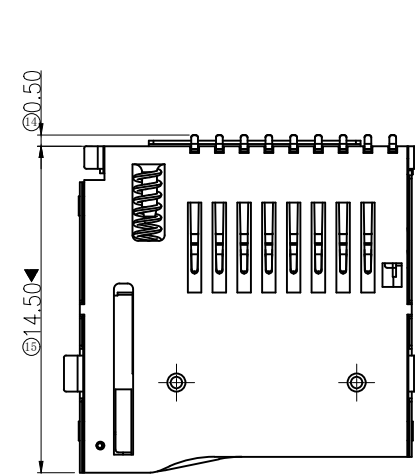


RoHS


REV.	ECN. #	DESCRIPTION	NAME	DATE
A0	_____	New version	GaoZhe	06/14/25

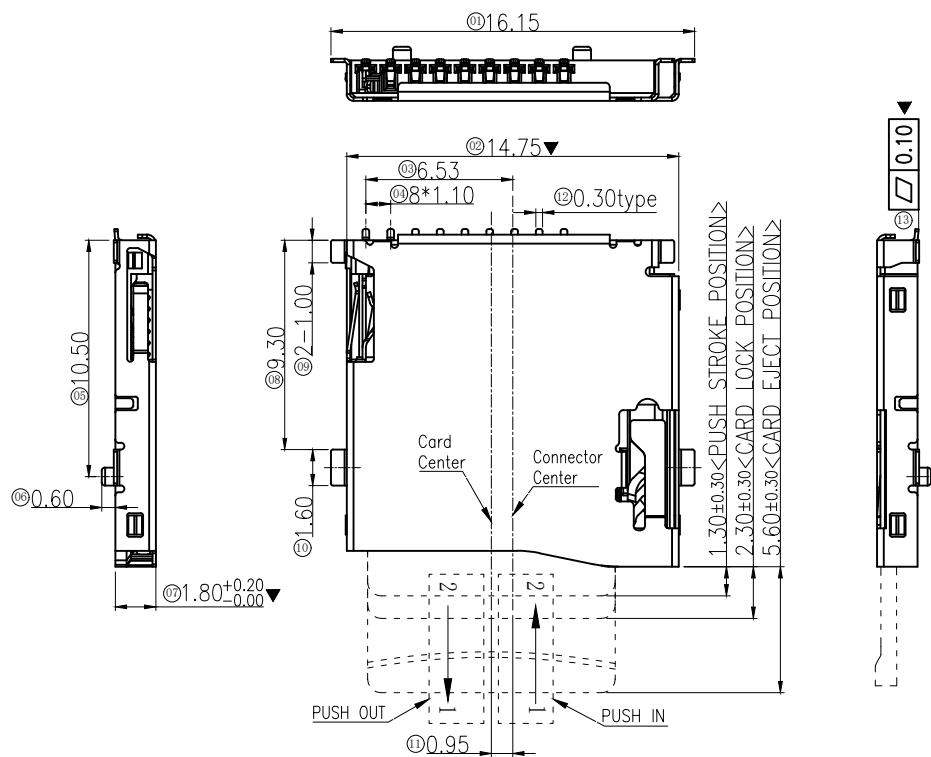

Notes:
Electrical Characteristics
Contact Current Rating:0.5A
Dielectric Withstanding Voltage:AC 500V
Insulation Resistance:1000M Ω Min
Contact Resistance:100m Ω Max

Environmental
Temperatruue Range: -25°C TO +85°C
Mechanical Characteristics
Mating Cyeles: 5000 Insertions
Insertion/Out Force:0.05-4.0kgf

Material
Insulator: High Temperature Plastic UL94V-0
Color:Black
Contact: Copper Alloy
Shell: Stainless
Spring:SWP
Plating
Contact
Underplate: Nickel 40u".
Contact Area: Gold Flash Over Nickel 40u".
Solder Area: Tin 80u" Min Over Nickel 40u".
Shell:Plate 30u"Nickel Min Over All

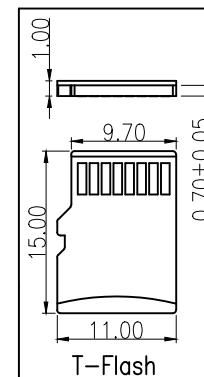


CIRCUIT:		CD		GROUND		CD		GROUND	
									
WITHOUT CARD		CARD INSERTED		CARD INSERTED		CARD INSERTED			
SWITCH CARD STATUS				8		DAT1		I/O/PP	
MILLIMETERS		INCH		4		VDD		S	
X. ° ±2°		X. ° ±2°		5		CLX		I	
.X ±0.30		.X ±0.012		6		VSS		S	
.XX ±0.20		.XX ±0.008		7		DAT0		I/O/PP	
.XXX ±0.10		.XXX ±0.004		8		DAT1		I/O/PP	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co.,Ltd		TITLE		TF Push外焊卡座-帶自鎖		DR			
		PART NO.		XDFP-0090-016		CHKD			
		PRO J.		PAGE	1/2	UNITS	mm	APPD	
				SIZE	A4	SCALE	1:1	LXTF-102016012	

深圳市连欣科技有限公司


ROHS

Direction of use


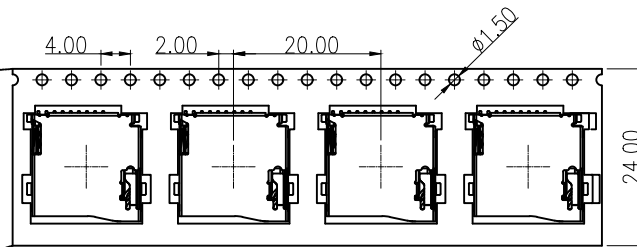


NOTES:

- 1、Packing quantity per plate: 1000PCS/Plate
- 2、Loading and packing method

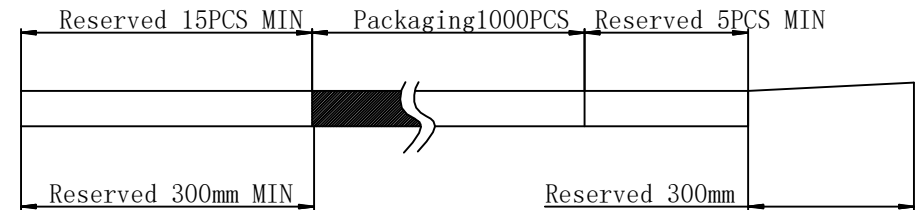

- 3、Total packaging: 10000PCS/Box

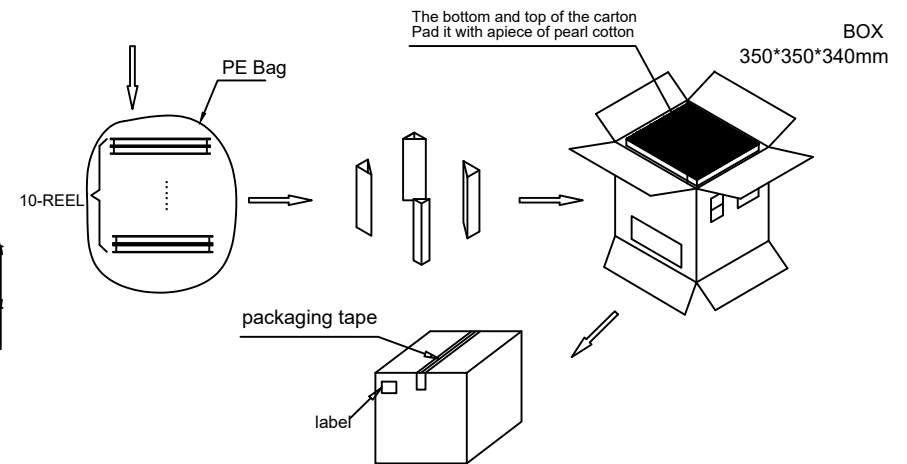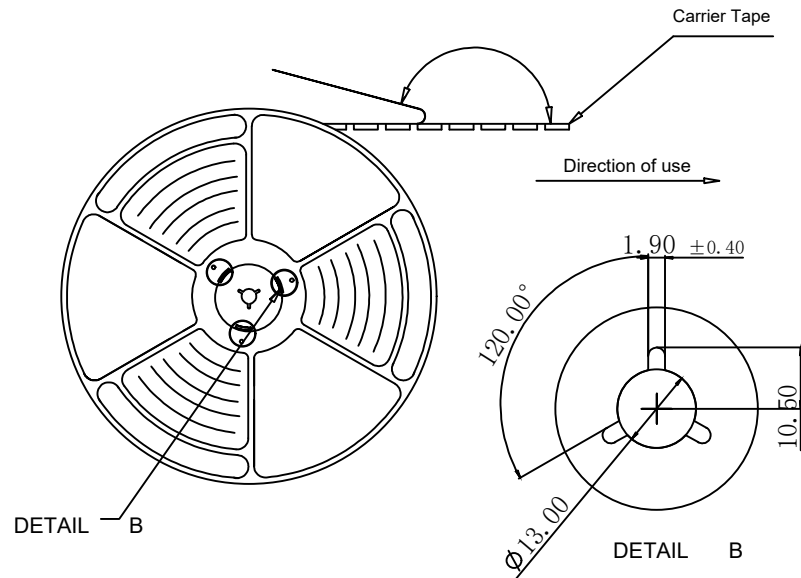

MILLIMETERS	INCH	深圳市连欣科技有限公司					
X. ° ±2°	X. ° ±2°						
.X ±0.30	.X ±0.012						
.XX ±0.20	.XX ±0.008						
.XXX ±0.10	.XXX ±0.004						
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd		TITLE	TF Push外焊卡座-带自锁			DR	
		PART NUM.	XDFF-0090-016			CHKD	
		PRO J.	PAGE	2/2	UNITS	mm	APPD
		SIZE	A4	SCALE	1:1		LXTF-102016012