
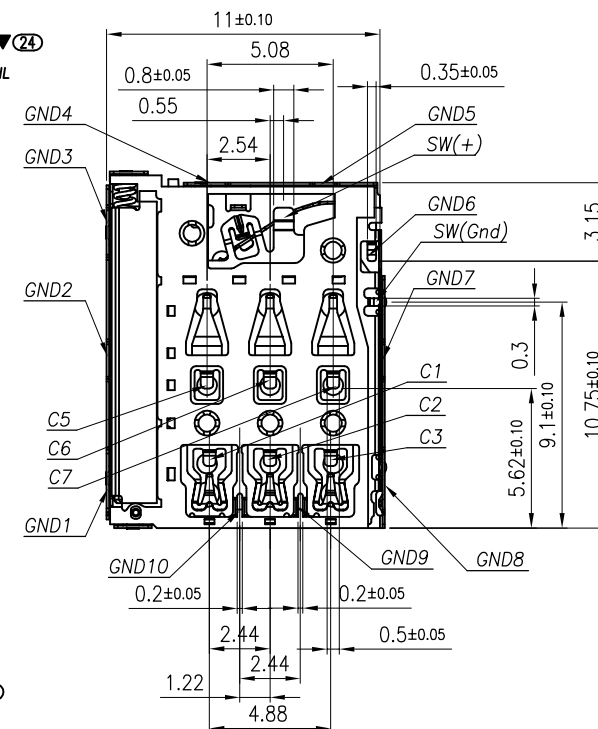
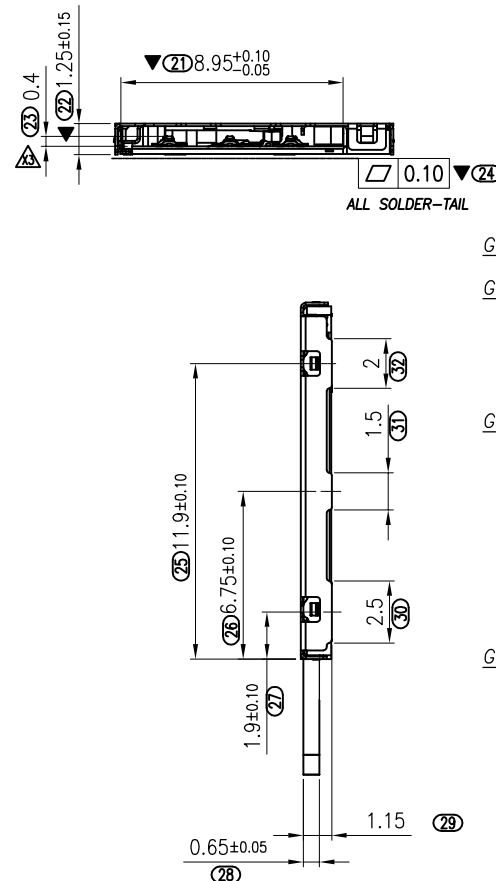


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2016/07/25

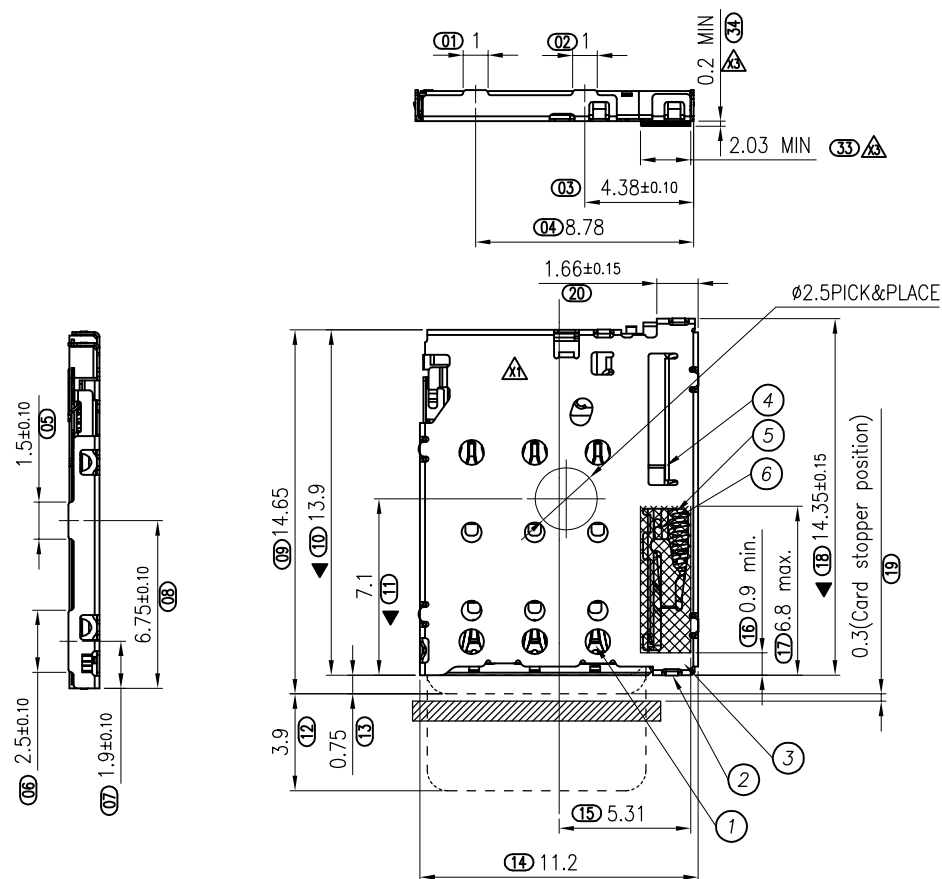

NOTES:

1. MATERIAL:

- 1.1 Housing:High Temperature Thermoplastic
UL94V-0; Color Black.

- ### 1.2 Terminal:Copper Alloy.

- 1.3 Shell:Stainless Steel.

2. SPECIALITY:

- 2.1 Rated current:0.5A

- 2.2 Rated voltage:30V

- 2.3 Contact Resistance:100mΩ MAX

- 2.4 Insulation Resistance:100MΩ MIN 500V DC

- 2.5 Dielectric withstanding voltage: 1

- 2.6 Solder ability: $255 \pm 5^{\circ}\text{C}$, $10 \pm 0.5\text{s}$.

- 2.7 Durability:5000 Cycles Min.


- 2.8 Insertion Force:10N MAX

- 2.9 Withdrawal Force:0.5N MIN


- 3.0 Operating condition: Temperature $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$;

Humidity 80% R.H. MAX

3. PLEASE CONTACT JBL SALES REPRESENTATIVE TO
VERIFY PRODUCT DETAILS & AVAILABILITY

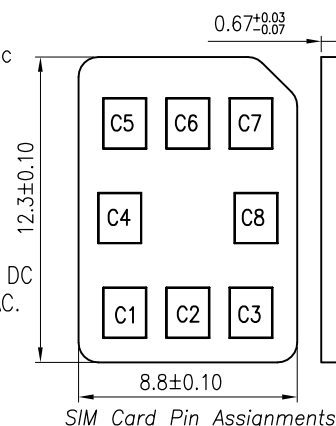


D/SW CIRCUIT



<i>PIN</i>	<i>Name</i>
<i>C1</i>	<i>Vcc</i>
<i>C2</i>	<i>RST</i>
<i>C3</i>	<i>CLK</i>
<i>C4</i>	<i>Reserved</i>
<i>C5</i>	<i>GND</i>
<i>C6</i>	<i>Vpp</i>
<i>C7</i>	<i>I/O</i>
<i>C8</i>	<i>Reserved</i>

6	HOOK	1	STAINLESS STEEL	
5	SPRING	1	SWP-B	Ni: 30u"min
4	SLIDER	1	GLASS FILLED LCP	
3	SHELL	1	STAINLESS STEEL	Solder plating gold flash
2	HOUSING	1	GLASS FILLED LCP	
1	CONTACT	1	COPPER ALLOY	Contact gold flash plating ;solder plating gold flash
NO.	DESCRIPTION	QTY.	Material	Color/plating

GENERAL TOLERANCE			DWG NO.			APPD:	WIND	Scale	1:
X.±0.20	x.*±2.0°	Title	1. 25H NANO PUSH SIM CARD	CHKD:				UNIT	mm
.X±0.10	.x*±1.0°			DR:					
.XX±0.05	.xx*±0.5°	Part NO.	5001B-SIM125-118	Date	2016/07/25				
.XXX±0.03	.xxx*±0.5°			东莞市文章济美电子有限公司					
SHEET	1/3								

