

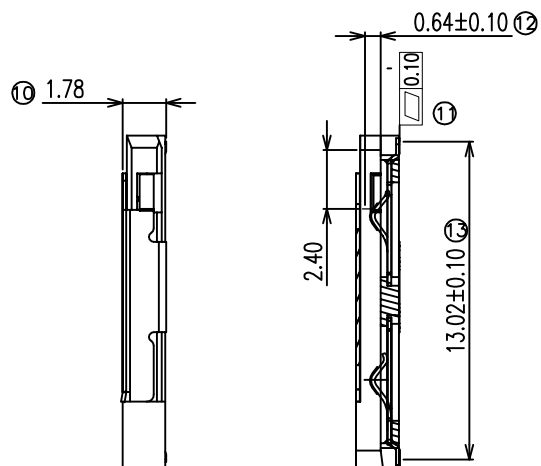
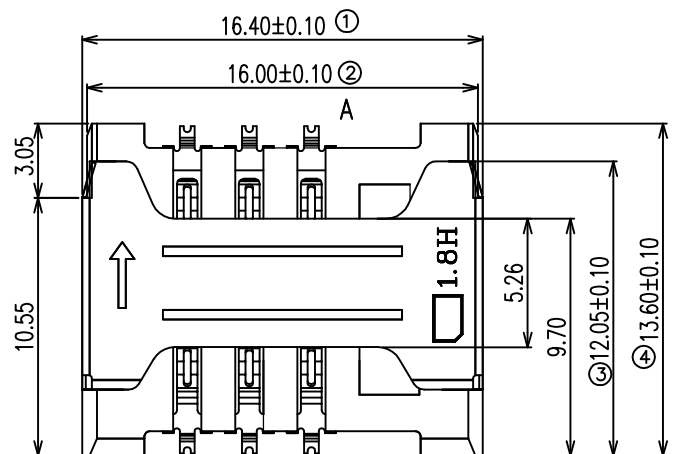
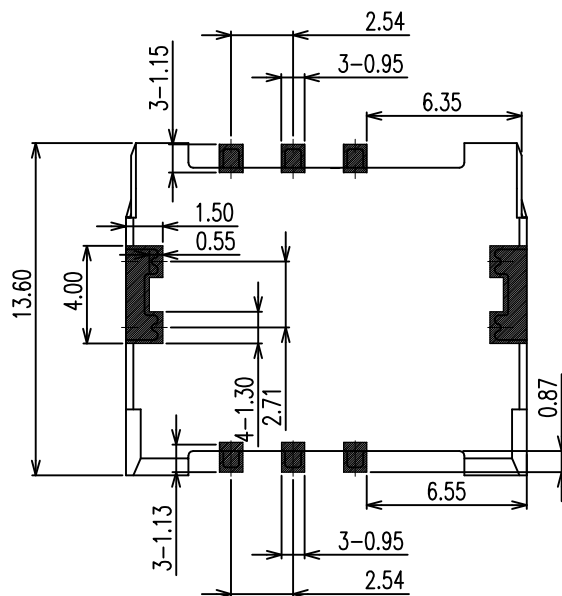


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2016/11/29

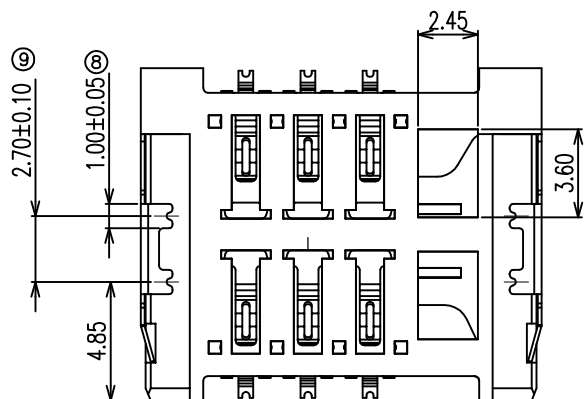

SECTION A-A

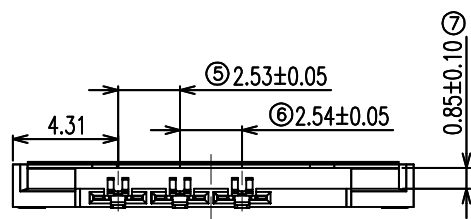

NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC FLAMMABILITY RATING UL94V-0
 - CONTACT: COPPER ALLOY T=0.12mm
 - SHELL: STAINLESS STEEL T=0.15mm
- FINISH:
 - CONTACT:
 - 3u" Min. Au PLATED ON CONTACT AREA
 - G/F PLATING ON SOLDER TAIL AREA
 - 50~80u" NICKEL UNDERPLATING OVERALL
 - SHELL:
 - G/F PLATED ON SOLDER TAIL AREA
 - 50~80u" Ni PLATED UNDER.
- SPECIFICATION:
 - CURRENT RATING: 0.5 A MAX.
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -55 °C ~ 85 °C
 - CONTACT RESISTANCE: 50 MILLIONHM MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC r.m.s
 - INSULATION RESISTNACE: 1000 MEGOHMS MIN

GENERAL TOLERANCE			DWG NO.		APPD:	WIND	Scale	1:1
X.±0.45	x.'±5°		Title	1.8H SIM CARD 6PIN 连桥无档 (防浪PIN)	CHKD:		UNIT	mm
.X±0.35	.x'±2°				DR:			
.XX±0.25	.xx'±1°		Part NO.	5001B-SIM180-104B	Date	2016/11/29		
.XXX±0.15	.xxx'±0.5°				东莞市文章济美电子有限公司			
SHEET	1/1							