
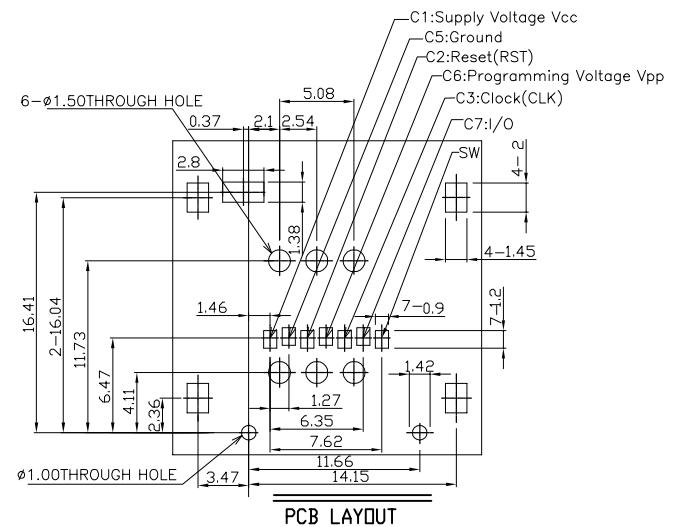
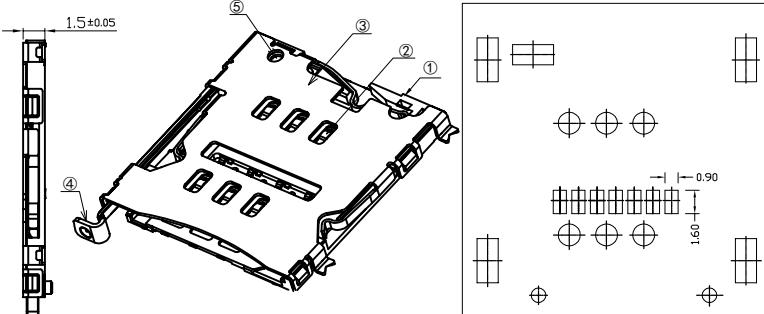
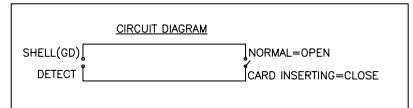


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2014/02/29

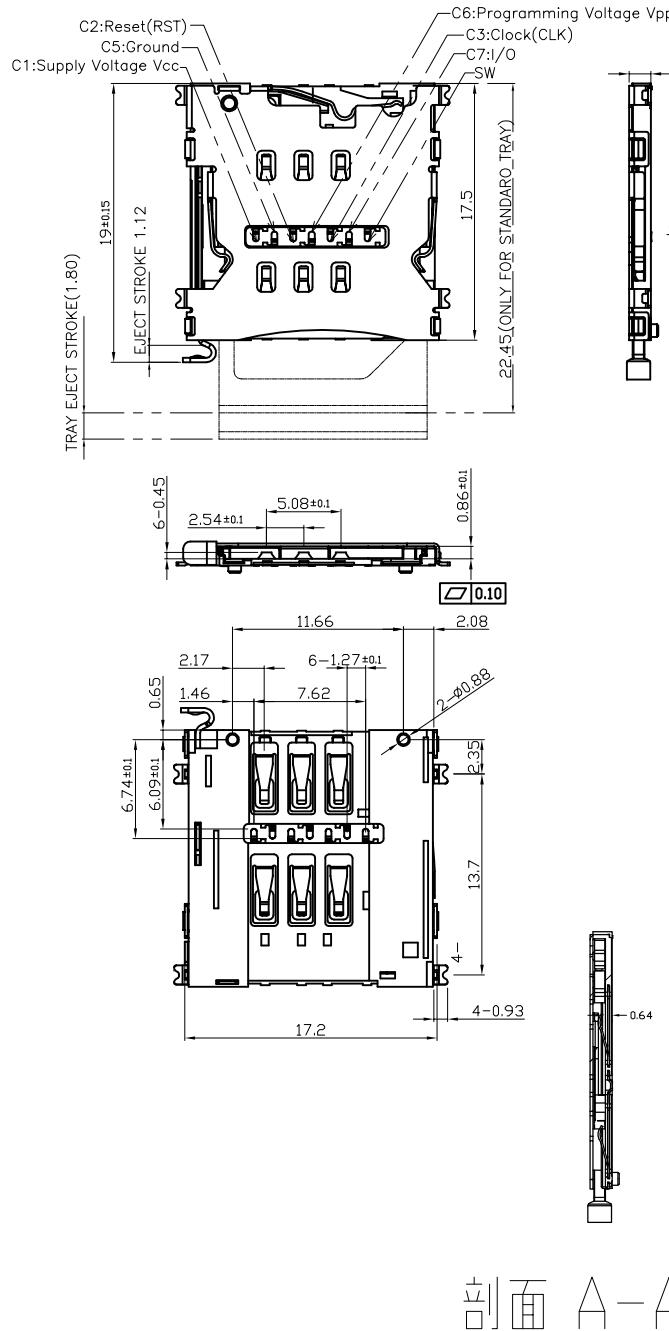

## NOTE:

## 钢网建议

1. ELECTRICAL CHARACTERISTICS:

  - 1-1. VOLTAGE: 30V DC, MAX
  - 1-2. LOW LEVEL CONTACT RESISTANCE: 30 mohms MAX. INITIALLY
  - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE
  - 1-4. INSULATION RESISTANCE: 100Mohm MIN. (DC 500V FOR 1 MINUTE)

2. MECHANICAL CHARACTERISTICS:

  - 2-1. DURABILITY: 1500 CYCLES
  - 2-2. OPERATING FORCE (INSERTING & WITHDRAWAL): 1N - 10N


3. ENVIRONMENTAL CHARACTERISTICS:

  - 3-1. RANGE: -25°C TO 85°C. (INCLUDING TERMINAL TEMP. RISE)
  - 3-2. STORAGE TEMP: -40°C TO 85°C

4. QUANTITY OF PRODUCTS: 1000PCS/REEL MIN

5. PLEASE CONTACT SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS



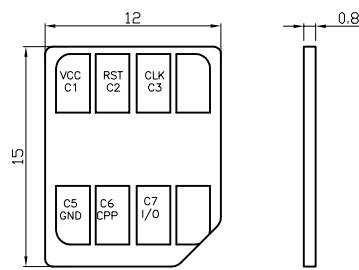

GENERAL TOLERANCE		DWG NO.			APPD:	WIND	Scale	1:1
X. $\pm 0.45$	x. $\pm 5^\circ$	Title	MICRO SIM CARD 1.5H		CHKD:		UNIT	mm
.X $\pm 0.35$	.x $\pm 2^\circ$				DR:			
.XX $\pm 0.25$	.xx $\pm 1^\circ$	Part NO.	5001B-SIM150-053		Date	2014/02/29		
.XXX $\pm 0.15$	.xxx $\pm 0.5^\circ$			东莞市文章济美电子有限公司				
SHEET	1/1							

东莞市文章济美电子有限公司