
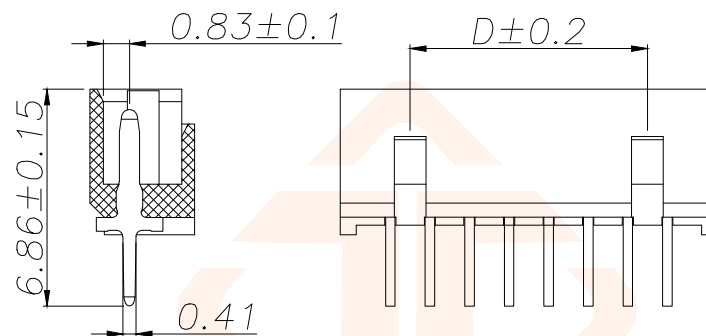
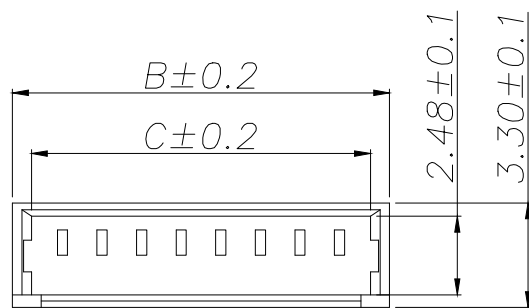


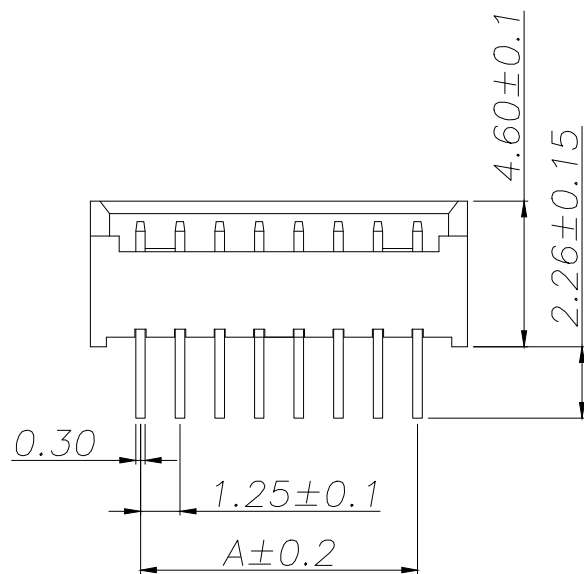

NOTES:


- 1.BASE: PA66
- 2.PIN: Brass
- 3.Solder Tab: Brass

SPECIFICATIONS:

- 1.Spacing: 1.25
- 2.Voltage Rating: 125V AC DC
- 3.Current Rating: 1A AC DC
- 4.Insulation Resistance: 100MΩ Min
- 5.Contact Resistance: 20mΩ Max
- 6.Withstanding voltage: 500V AC 1/Minute
- 7.Temperatuer Range: -25℃ ~+ 85℃

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

PIN number variable size comparison table					
PART NO	PIN	A	B	C	D
JXT-MX1.25-2PZZ	2	1.25	4.40	3.20	
JXT-MX1.25-3PZZ	3	2.50	5.65	4.45	
JXT-MX1.25-4PZZ	4	3.75	6.90	5.70	2.50
JXT-MX1.25-5PZZ	5	5.00	8.15	6.95	3.75
JXT-MX1.25-6PZZ	6	6.25	9.40	8.20	5.00
JXT-MX1.25-7PZZ	7	7.50	10.65	9.45	6.25
JXT-MX1.25-8PZZ	8	8.75	11.90	10.70	7.50
JXT-MX1.25-9PZZ	9	10.00	13.15	11.95	8.75
JXT-MX1.25-10PZZ	10	11.25	14.40	13.20	10.00
JXT-MX1.25-11PZZ	11	12.50	15.65	14.45	11.25
JXT-MX1.25-12PZZ	12	13.75	16.90	15.70	12.50
JXT-MX1.25-13PZZ	13	15.00	18.15	16.95	13.75
JXT-MX1.25-14PZZ	14	16.25	19.40	18.20	15.00
JXT-MX1.25-15PZZ	15	17.50	20.65	19.45	16.25
JXT-MX1.25-16PZZ	16	18.75	21.90	20.70	17.50

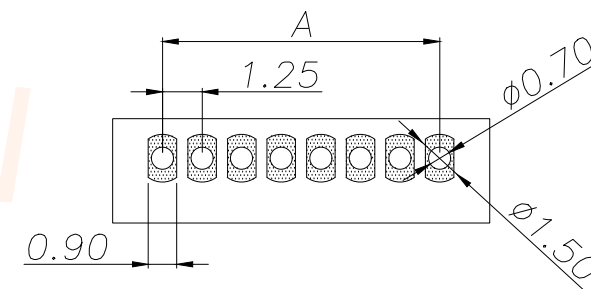

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd			
.X±0.30	X.* ±5°	PART NO. JXT-MX1.25-NPZZ	TITLE: 1.25MM 直针		
.XX±0.20	X.X* ±1°				
.XXX±0.10	X.XX*±0.5°				
UNITS	mm	DESIGN: Ethan	MANUFACTURE DWG		
MATERILA	— — —	CHED: Olvia		SCALE	SHEET
FINISH	— — —	APPD: Ava		N:A	1/1