

Features

- For surface mounted applications in order to optimize board space.
- Low profile package.
- Excellent clamping capability.
- IEC61000-4-2ESD 30kV Air, 30kV contact compliance
- Protects one I/O line
- Lead-free parts meet RoHS requirements.
- Compliant to Halogen-free



Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case:Molded plastic,SOD-123
- Terminals:Plated terminals,solderable per MIL-STD-750, Method 2026
- Polarity:Indicated by cathode band
- Mounting Position:Any

Applications

- Personal digital assistants(PDA)
- Cellular handsets&Accessories
- Portable devices
- Portable instrumentation
- Handhelds and notebooks
- Digital cameras

Maximum ratings and Electrical Characteristics(AT TA=25°C unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	Value	UNIT
Peak Power Dissipation	Peak Pulse Power Dissipation at TA=25°C by 10×1000us(Note 1)	PPPM	400	W
Operating junction temperature range		T _j	-55 to +150	°C
Storage temperature range		T _{stg}	-55 to +150	°C

Note:1.Non-repetitive current pulse,per Fig.2 and derated above TA=25°C per Fig.1

Electrical Characteristics(TA=25°C unless otherwise noted)

Part Number	Breakdown Voltage VBR@IT			Maximum Reverse Leakage IR@VRWM (μA)	Working Peak Reverse Voltage VRwm(V)	Maximum Reverse Surge Current Ipp(2)(A)	Maximum Clamping Voltage Vc@Ipp(V)	
	(Uni)	Min(V)	Max(V)					-(1)(mA)
PTVS12VS1UR,115-JSM		13.30	14.70	1	2.5	12.0	20.1	19.9

Rating and characteristic curves

FIG.1 - PULSE DERATING CURVE

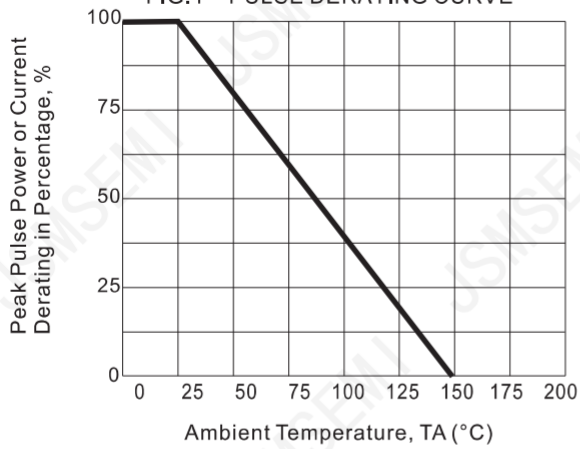


FIG.2 - 10X1000us PULSE WAVEFORM

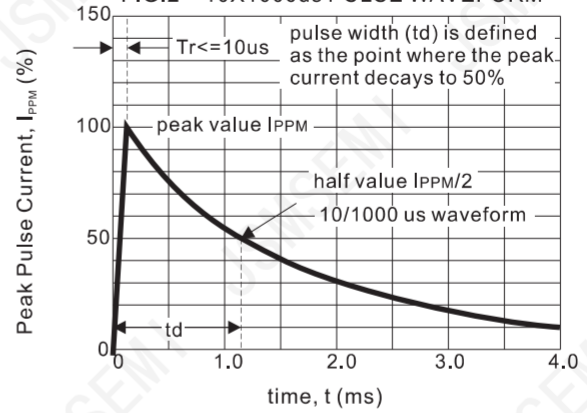


FIG.3 - 8X20us PULSE WAVEFORM

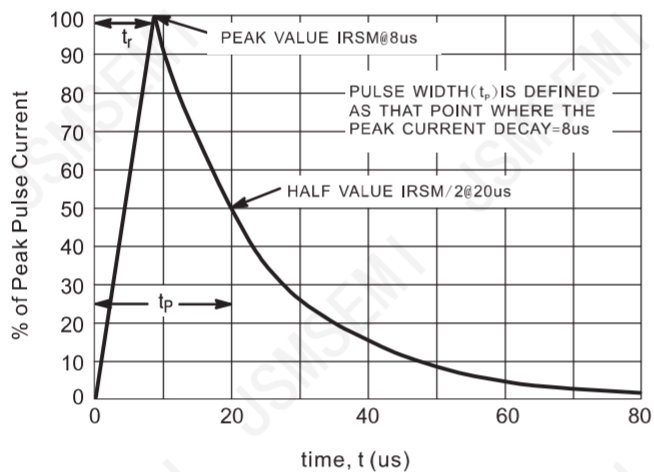


FIG.4 - PEAK PULSE POWER RATING CURVE



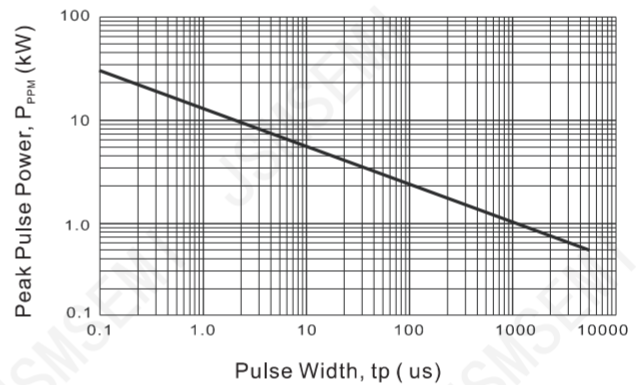


FIG.5 - TYPICAL JUNCTION CAPACITANCE

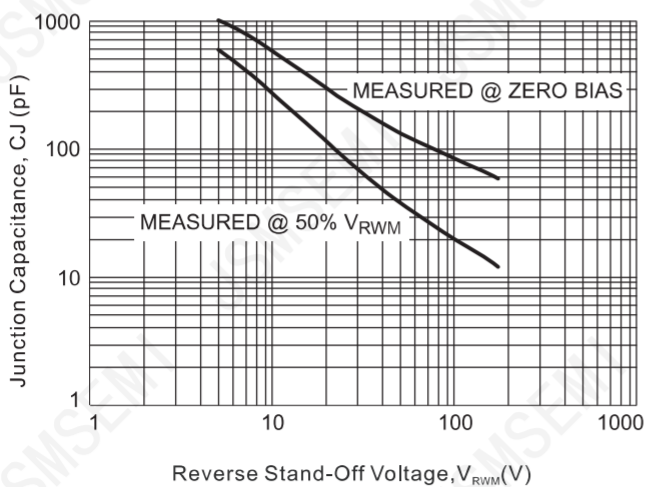


Package outline

SOD-123

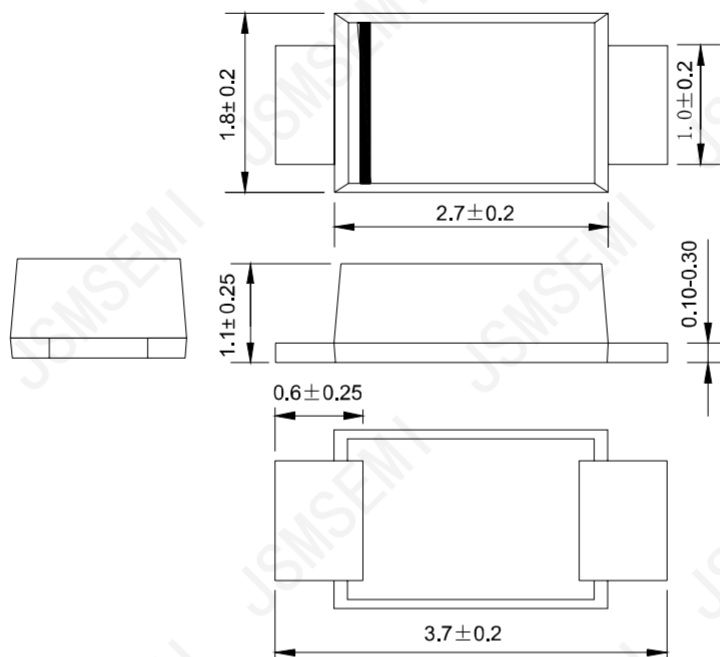

Suggested solder pad layout

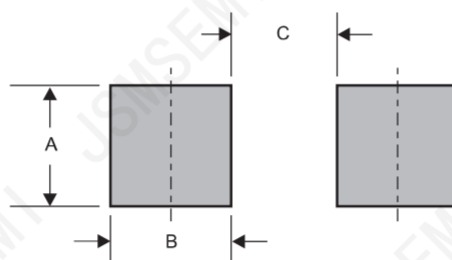

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SOD-123	0.044 (1.10)	0.040 (1.00)	0.079 (2.00)

Revision History

Rev.	Change	Date
V1.0	Initial version	6/27/2021

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com