REV.	DESCRIPTION	ECN NO.	NAME	DATE

P/N	Remark
UC01-1B16F88P10	LCP BLACK
UC01-1O16F88P10	LCP ORANGE

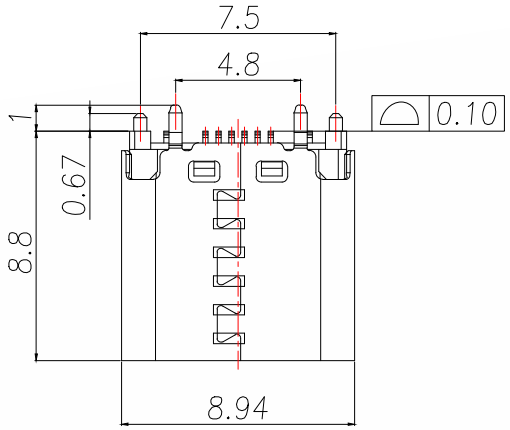

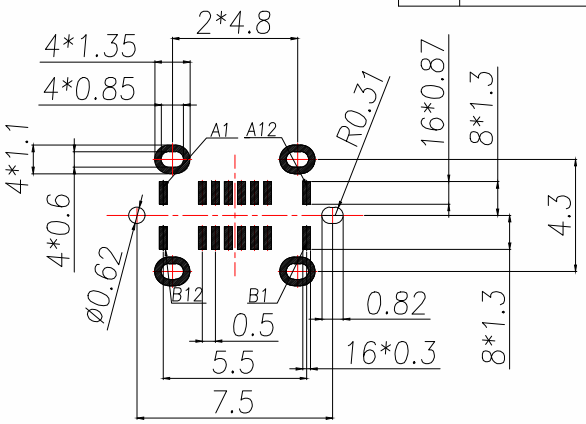

(TOP VIEW)

RECOMMENDED P.C.B. LAYOUT (T:0.8mm)

TOLERANCE UNSPECIFIED ±0.05mm

SPECIFICATION:

1. MATERIAL & FINISH:SEE THE LIST;
2. PLATING SPECIFICATION:
   2-1.CONTACTS:
   Ni 50u" MIN. UNDER PLATED OVER ALL.
   Au PLATED ON THE MATING AREA OF CONTACT.
   Au PLATED ON THE SOLDER AREA.
   2-2.SHELL:Ni 30u" MIN. UNDER PLATED OVER ALL.
   2-3.MID PLATE:CLEAR ONLY
3. MECHANICAL:
   3.1.MATING FORCE:0.5~2.0kgf;
   3.2.UNMATING FORCE:0.8~2.0kgf.
   0.6~2.0kgf AFTER DURABILITY TEST;
   3.3.DURABILITY:10000 CYCLES;
4. ELECTRICAL:
   4.1.CURRENT RATING:5A Max;
   4.2.VOLTAGE RATING:20V Max;
   4.3.DIELECTRIC WITHSTANDING VOLTAGE:100VAc;
   4.4.CONTACT RESISTANCE:40mΩ Ohms Max.;
   4.5.INSULATION RESISTANCE:100M Ohms Min.;
5. ENVIRONMENTAL:
   5.1.OPERATING TEMPERATURE: -40°C~+85°C;
   5.2.WETTING TEMPERATURE: 265±5°C,5±0.5s
   5.3.Salt Spray Test:48H Min

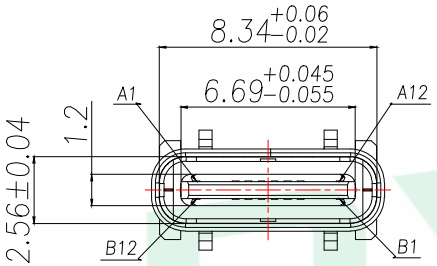

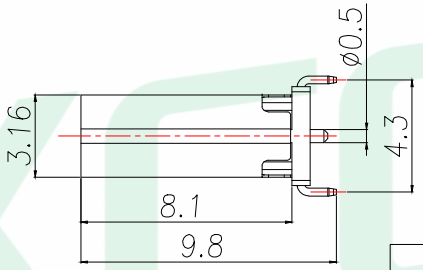



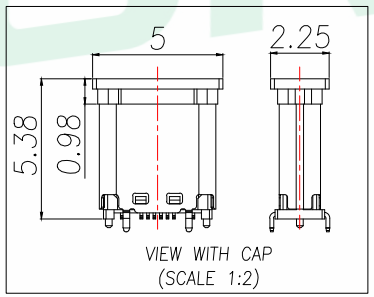

VIEW WITH CAP
(SCALE 1:2)



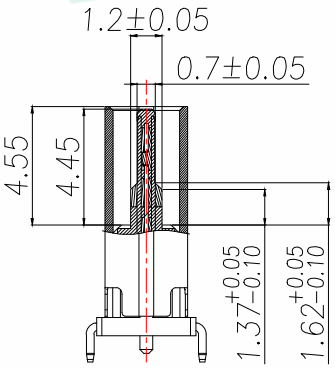

SECTION A-A

NO.	PART NAME	Q'TY	MATERIAL	FINISH
5	CAP	1	High temperature plastic	UL94 V-0,Black
4	Shell	1	Stainless Steel,T=0.30mm	30u"Ni Min.
3	GroundBar	1	Stainless Steel,T=0.15mm	No Plating
2	Contact	16	Copper Alloy,T=0.15mm	Au/Ni-Plated
1	Housing	1	High temperature plastic	UL94 V-0

GENERAL TOLERANCE					
DIM.	TOL.				
x.	±0.50				
x.x	±0.35				
x.xx	±0.25				
GENERAL ANGLE:					
x.°	±5.0°				
x.x°	±3.0°				
x.xx°	±2.5°				
UNIT: mm	SCALE: none	SHEET: 1of 1	DWG. SIZE: A4	LAYER: bxconn	

DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD

BXCONN®

TITLE: TYPE-C 16p 立贴式 母座 H8.8mm

DWG. NO.: UC01-1X16F88P10

CHECKED: MAX

PART NO.: UC01-1X16F88P10

DRAWN: ELLA

APPROVED: WILL

REV.	DESCRIPTION	ECN NO.	NAME	DATE

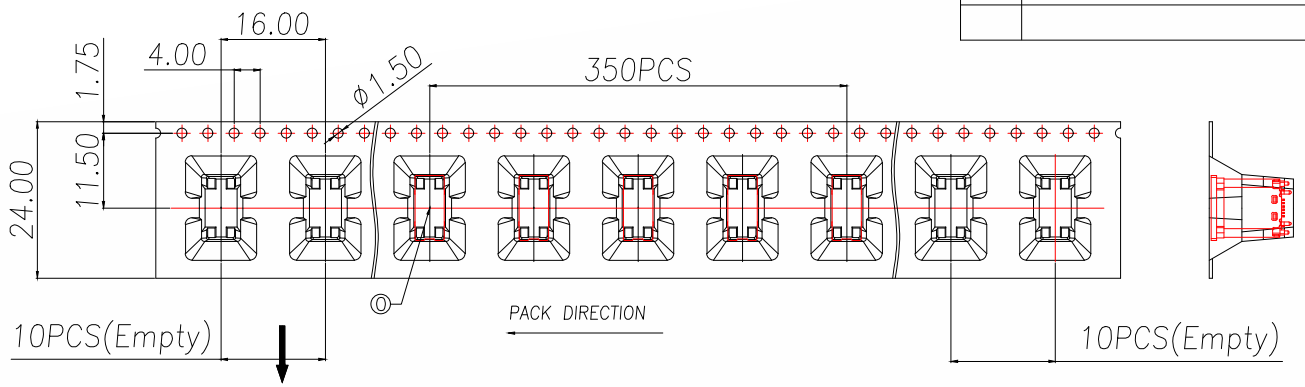

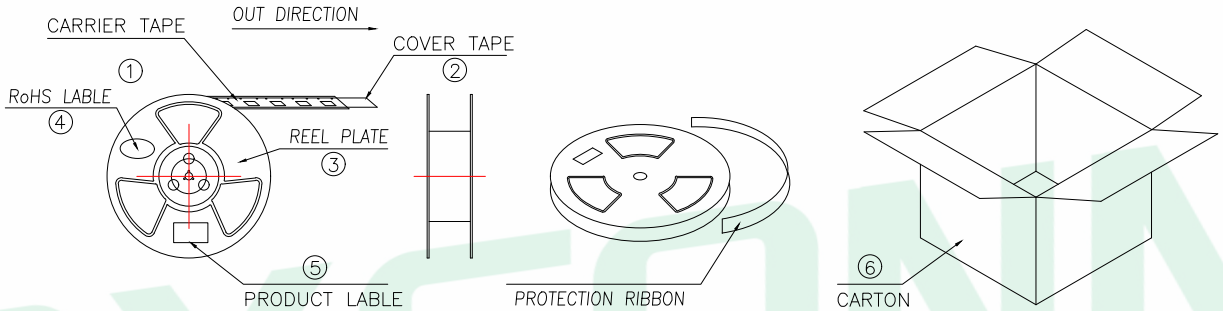

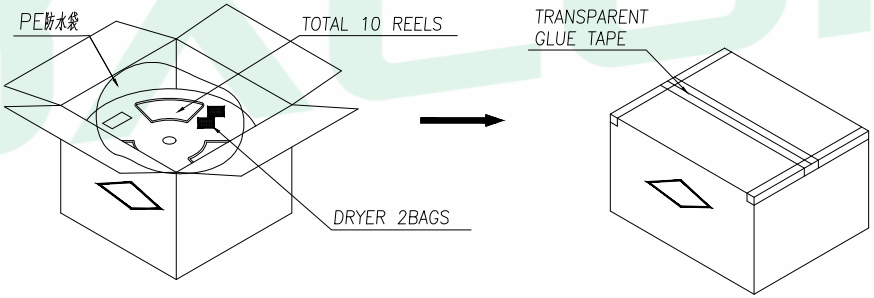

说明:

1.每卷前后各空10PCS,尾部用美纹胶纸封住;
2.将产品放满盘后,再卷一圈保护带,用美纹胶纸将其封住,并贴上1Pcs物料标签;
3.每10卷盘一叠共3500Pcs并装入1个外箱内;
4.在搬运过程中要轻拿轻放;
5.在运输中不可堆放过多(1.8M最高),不可重压;
6.跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
a.产品不可跑出下带凹槽;
b.产品不可有摔伤,变形;
c.内包装材料不可严重破损.

PIN DEFINE TABLE

PIN	SIGNAL	PIN	SIGNAL
A12	GND	B1	GND
A11	-	B2	-
A10	-	B3	-
A9	VBUS	B4	VBUS
A8	SBU1	B5	CC2
A7	D-	B6	D+
A6	D+	B7	D-
A5	CC1	B8	SBU2
A4	VBUS	B9	VBUS
A3	-	B10	-
A2	-	B11	-
A1	GND	B12	GND

NO.	NAME	SPEC	Q'TY
0	TYPE C RECEPTACLE		3500PCS/CARTON
1	CARRIER TAPE	W=24mm,T=0.50mm	350PCS/PLATE
2	COVER TAPE	W=21.3mm	10PLATES/CARTON
3	REEL PLATE	ø330×100×24.4mm	10PCS/CARTON
4	RoHS LABEL		10PCS/CARTON
5	PRODUCT LABER		10PCS/CARTON
6	CARTON	350×340×310mm	1PCS/PACKAGE

GENERAL TOLERANCE

DIM.	TOL.
x.	±0.50
x.x	±0.35
x.xx	±0.25
GENERAL ANGLE:	
x.°	±5.0°
x.x°	±3.0°
x.xx°	±2.5°

DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD

BXCONN®

TITLE: TYPE-C 16p 立贴式 母座 H8.8mm

DWG. NO.: UC01-1X16F88P10 | CHECKED: MAX

PART NO.: UC01-1X16F88P10 | DRAWN: ELLA

UNIT:	SCALE:	SHEET:	DWG. SIZE:	LAYER:	APPROVED:
mm	none	1of 1	A4	bxconn	WILL