

1.Description

The FOD3150 is a gate driven optocoupler with an output current of 1.0A, with an AlGaAs LED, which is coupled to a photosensitive integrated circuit through infrared light. This optocoupler can drive most low-power IGBTs and MOSFETs. In the motor control inverter and high-performance power system applications, it is very suitable for fast switching drive power IGBTs and MOSFETs.

3.Features

- 30kV/ μ s minimum Common Mode Rejection
- 1.5A maximum peak output current
- 1.0A minimum peak output current
- Wide operating V_{CC} Range: 15V~30V
- 400ns maximum propagation delay

2.Applications

- Uninterrupted Power Supply
- IGBT isolation / power MOSFET gate drive
- Induction heating
- Industrial inverters



- 100ns of pulse width distortion
- Under Voltage Lock-Out protection (UVLO) with hysteresis
- Operating temperature range: -40°C~ +110°C

4.Truth Table

LED	$V_{CC}-V_{SS}$ “ POSITIVE GOING” (TURN-ON)	$V_{CC}-V_{SS}$ “ NEGATIVE GOING” (TURN-OFF)	VO
OFF	0~30V	0~30V	LOW
ON	0~11.5V	0~10V	LOW
ON	11.5~13.5V	10~12V	TRANSITION
ON	13.5~30V	12~30V	HIGH



5.Pinning Information

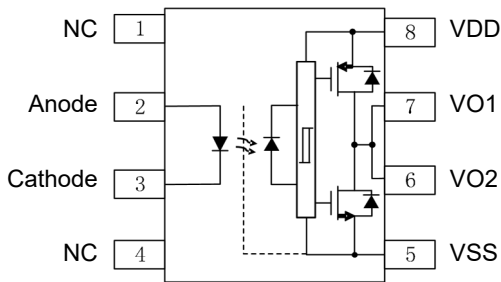

DIP-8



SOP- 8

Note: 0.1uF bypass capacitor must be connected between pins 5 and 8.

6.Insulation And Safety Related Specifications

Parameter	Symbol	Note	Value	Unit
Creepage Distance	L	Measured from input terminals to output terminals, shortest distance path along body	≥7	mm
Clearance Distance	L	Measured from input terminals to output terminals, shortest distance through air	≥7	mm
Insulation Thickness	DTI	Insulation thickness between emitter and detector	≥0.4	mm
Peak Isolation Voltage	V_{IORM}	DIN/EN/IEC EN60747-5-5.	1500	V_{peak}
Transient Isolation Voltage	V_{IOTM}	DIN/EN/IEC EN60747-5-5.	7000	V_{peak}
Isolation Voltage	V_{ISO}	For 1 min	5000	V_{rms}



7. Absolute Maximum Ratings $T_A = 25^\circ\text{C}$

Parameter		Symbol	Value	Units
Input	Forward Input Current	I_{FM}	25	mA
	Reverse Voltage	V_R	5	V
Output	Peak Output Current ⁽¹⁾	$I_{O(PEAK)}$	1.5	A
	Supply Voltage	$V_{DD} - V_{SS}$	0~35	V
	Output Voltage	V_O	0~ V_{DD}	V
Isolation Voltage		V_{ISO}	5000	V_{rms}
Input Power Dissipation ^{(2) (4)}		PD_I	45	mW
Output Power Dissipation ^{(3) (4)}		PD_O	250	mW
Operating Temperature		T_{opr}	-40 to 110	$^\circ\text{C}$
Storage Temperature		T_{stg}	-55 to 125	$^\circ\text{C}$
Soldering Temperature		T_{sol}	260	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Maximum pulse width = 10 μs , maximum duty cycle = 0.2 %.
2. Derate linearly above 87 $^\circ\text{C}$, free air temperature at a rate of 0.77 mW/ $^\circ\text{C}$.
3. No derating required across temperature range.
4. Functional operation under these conditions is not implied. Permanent damage may occur if the device is subjected to conditions outside these ratings.

8. Recommended Operating Conditions

Parameter	Symbol	Min	Max	Units
Power Supply Voltage	$V_{CC} - V_{SS}$	15	30	V
Input Current (ON)	$I_{F(ON)}$	7	16	mA
Input Voltage (OFF)	$V_{F(OFF)}$	0	0.8	V
Operating Temperature	T_A	-40	110	$^\circ\text{C}$



9. Electro-optical Characteristics ($T_A=25^\circ\text{C}$)

All minimum and maximum specifications are at recommended operating conditions, unless otherwise noted

All typical values are at $T_A=25^\circ\text{C}$, $V_{DD}=30\text{V}$, and $V_{SS}=\text{GND}$.

Parameter	Symbol	Conditions		Min	Typ	Max	Units
Forward Voltage	V_F	$I_F=10\text{mA}$		1.2	1.5	1.8	V
Reverse Current	I_R	$V_R=5\text{V}$				10	μA
High Level Output Current ⁽⁵⁾	I_{OH}	$V_O=V_{DD}-1\text{V}$		0.2			A
		$V_O=V_{DD}-4\text{V}$		1			A
Low Level Output Current ⁽⁵⁾	I_{OL}	$V_O=V_{SS}+1\text{V}$		0.2	1		A
		$V_O=V_{SS}+4\text{V}$		1			A
High Level Output Voltage	V_{OH}	$I_F=10\text{mA}$	$I_O=-1\text{A}$	$V_{DD}-4\text{V}$	$V_{DD}-2.5\text{V}$		V
			$I_O=-100\text{mA}$	$V_{DD}-0.5\text{V}$	$V_{DD}-0.1\text{V}$		V
Low Level Output Voltage	V_{OL}	$I_F=0\text{mA}$	$I_O=1\text{A}$		$V_{SS}+2.5\text{V}$	$V_{SS}+4\text{V}$	V
			$I_O=100\text{mA}$		$V_{SS}+0.1\text{V}$	$V_{SS}+0.5\text{V}$	V
High Level Power Supply Current	I_{ccH}	$V_O=\text{Open}$, $I_F=7$ to 16mA			1.8	3.8	mA
Low Level Power Supply Current	I_{ccL}	$V_O=\text{Open}$, $V_F=0$ to 0.8V			2.1	3.8	mA
Input The Turn On Current	I_{FLH}	$I_O=0\text{mA}$, $V_O>5\text{V}$			2.8	5	mA
Input The Turn Off Voltage	V_{FHL}	$I_O=0\text{mA}$, $V_O<5\text{V}$		0.8			V
UVLO Threshold	V_{UVLO+}	$I_F=10\text{mA}$, $V_O>5\text{V}$		11.5	12.7	13.5	V
	V_{UVLO-}	$I_F=10\text{mA}$, $V_O<5\text{V}$		10	11.2	12	V
UVLO Hysteresis	$UVLO_{HYS}$				1.5		V
Isolation Resistance	R_{ISO}	$V_{I-O}=500\text{V}$, 40~60% R.H.			10^{11}		Ω
Isolation Capacitance	C_{ISO}	$V_{I-O}=0\text{V}$, Freq=1MHZ			1		pF
Propagation Delay Time to Low Output Level	T_{PHL}	$I_F=7\text{mA}$ to 16mA $R_g=10\Omega$ $C_g=10\text{nF}$ $F=10\text{KHZ}$ Duty Cycle=50%			100	300	ns
Propagation Delay Time to High Output Level	T_{PLH}				100	300	ns
Pulse Width Distortion	PWD				3	100	ns
Propagation Delay Difference Between Any Two Parts	P_{DD}			-250		250	ns



Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output Rise Time (10% To 90%)	T_R	$I_F=7\text{mA to }16\text{mA}, R_g=10\Omega, C_g=10\text{NF}$ $F=10\text{KHZ, Duty Cycle}=50\%$		80		ns
Output Drop Time(90%~10%)	T_F			80		ns
UVLO Turn On Delay	$T_{UVLO\ ON}$	$I_F=10\text{mA}, V_O>5\text{V}$		1.6		μs
UVLO Turn Off Delay	$T_{UVLO\ OFF}$	$I_F=10\text{mA}, V_O<5\text{V}$		0.4		μs
Output High Level Common Mode Transient Immunity	$ CM_H $	$T_A=25^\circ\text{C}, V_{DD}=30\text{V}$ $V_{CM}=2000\text{V}, I_F=7\sim16\text{mA}, V_F=0\text{V}$	30	50		$\text{KV}/\mu\text{s}$
Output Low Level Common Mode Transient Immunity	$ CM_L $	$T_A=25^\circ\text{C}, V_{DD}=30\text{V}$ $V_{CM}=2000\text{V}, I_F=7\sim16\text{mA}, V_F=0\text{V}$	30	50		$\text{KV}/\mu\text{s}$


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted.

Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Maximum pulse width = 10 μs , maximum duty cycle = 0.2 %.




10.1 Typical Characteristic

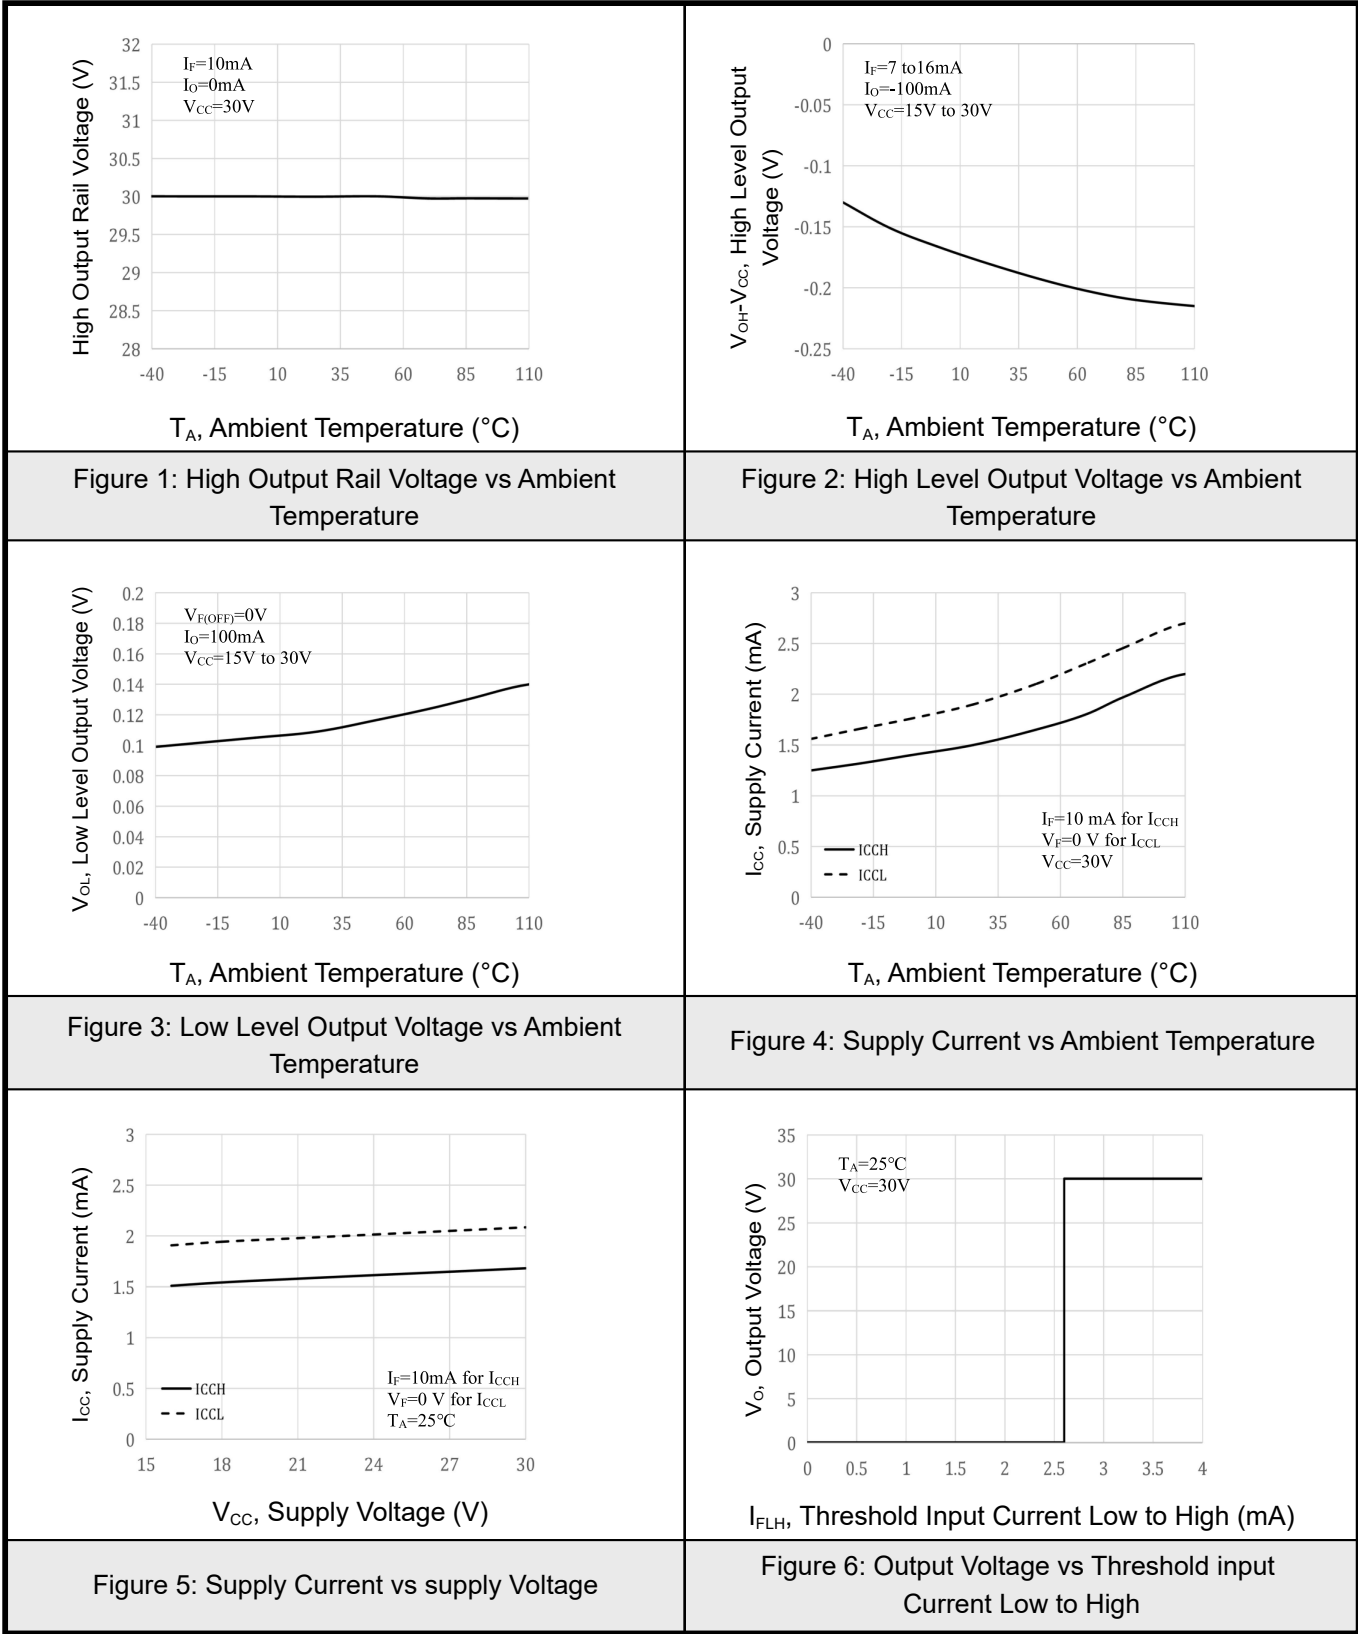



10.2 Typical Characteristic

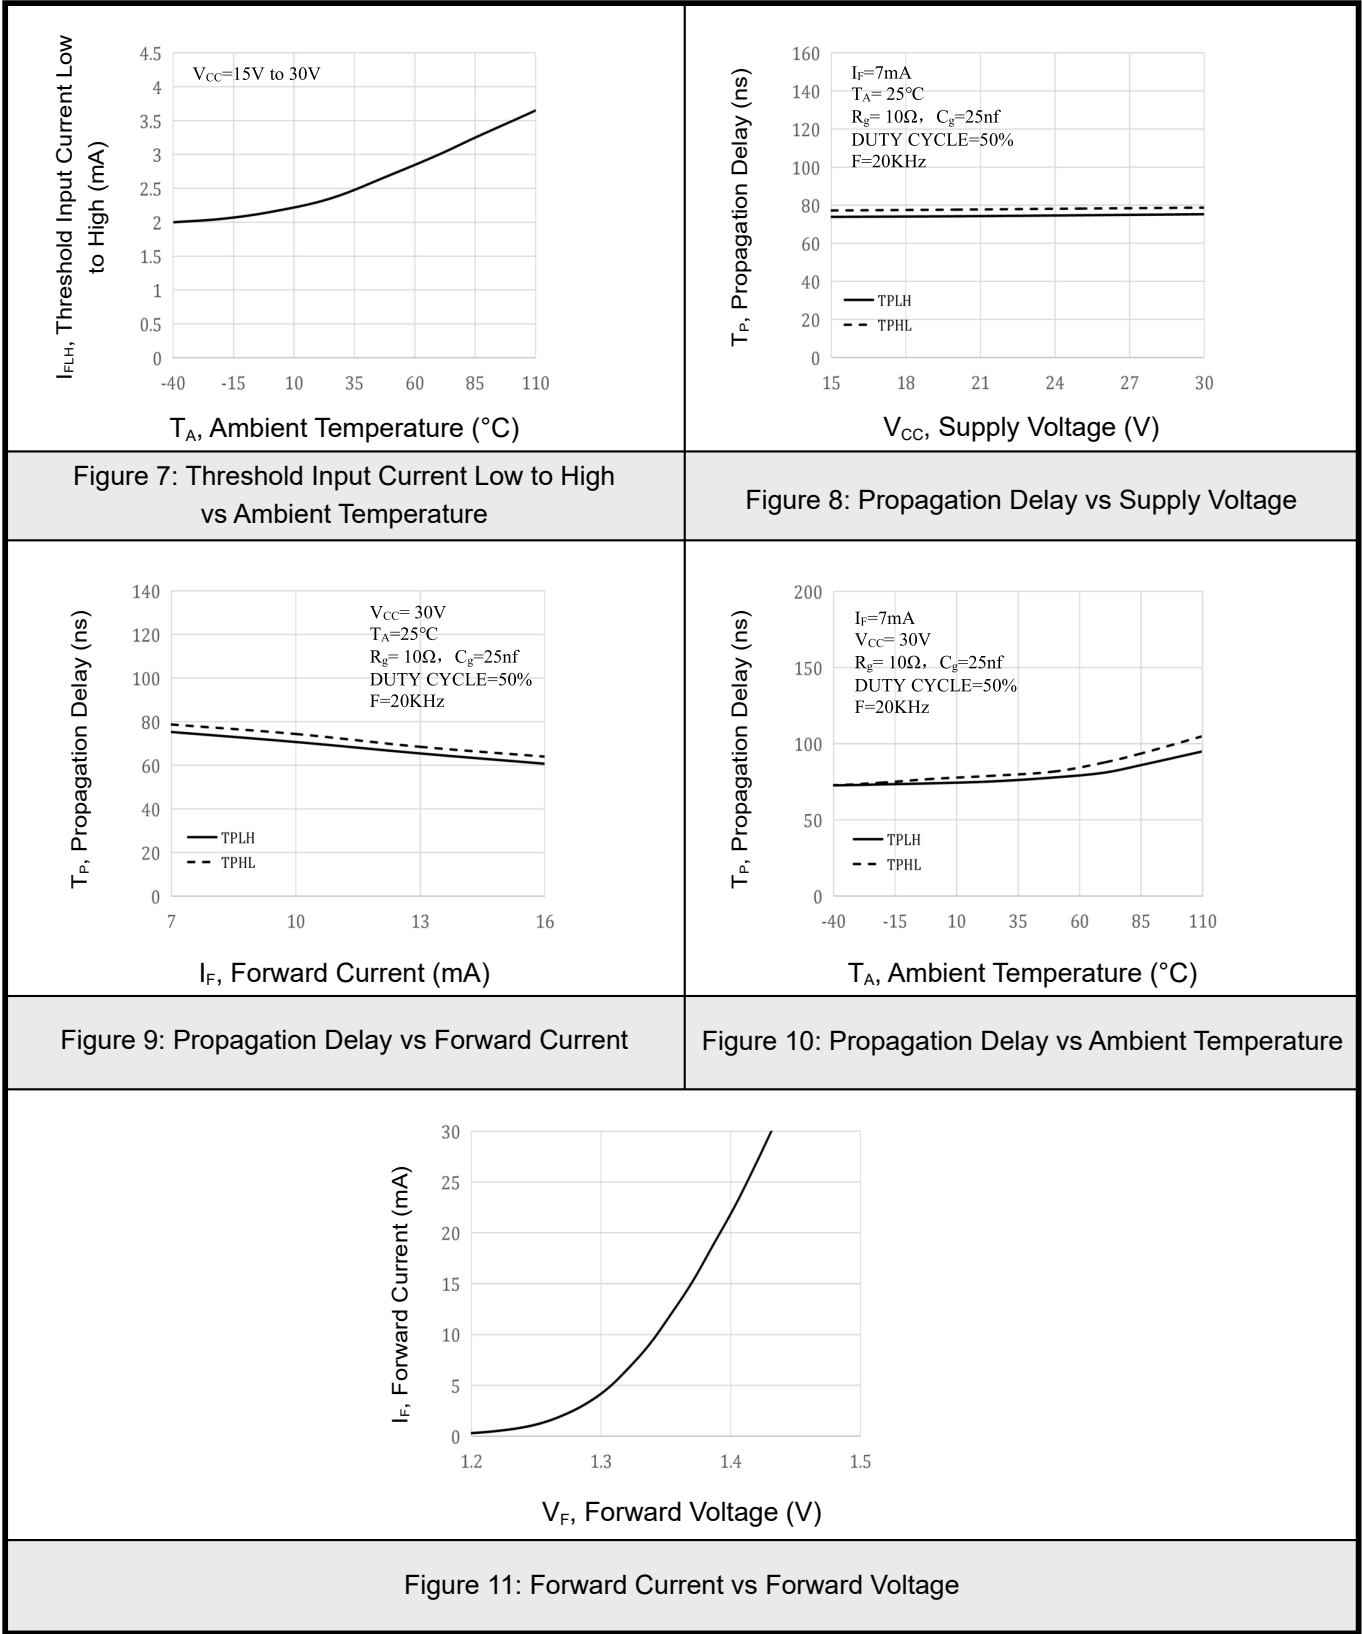



11. Test Circuits Diagrams






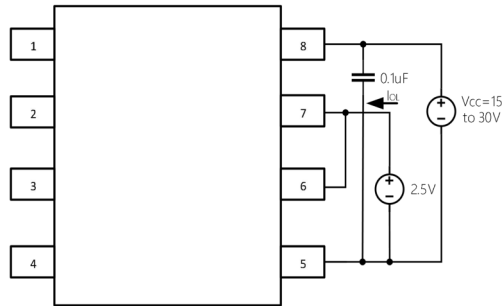
Figure.12 I_{OL} Pulsed Test CircuitFigure.13 I_{OH} Pulsed Test CircuitFigure.14 V_{OH} Pulsed Test CircuitFigure.15 V_{OL} Pulsed Test CircuitFigure.16 $I_{F_{LH}}$ Test Circuit

Figure.17 UVLO Test Circuit




Figure.18 T_{PHL} , T_{PLH} , T_R , T_F Test Circuit

Figure.19 CMR Test Circuit

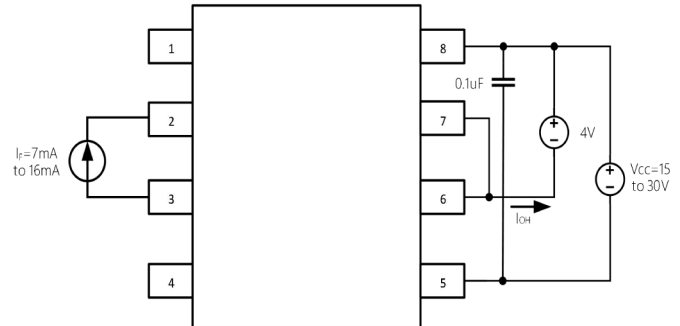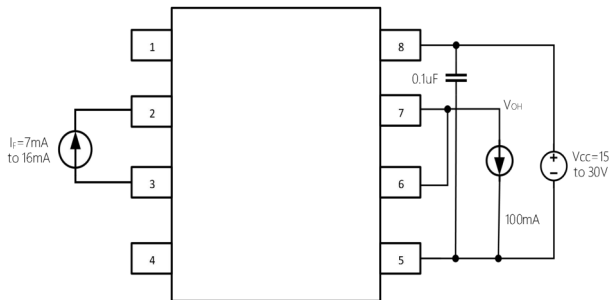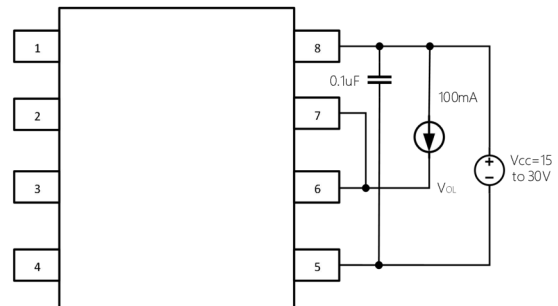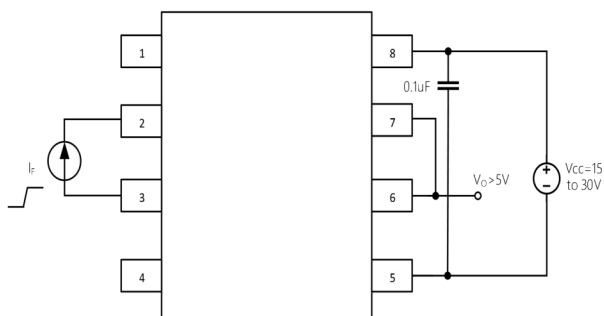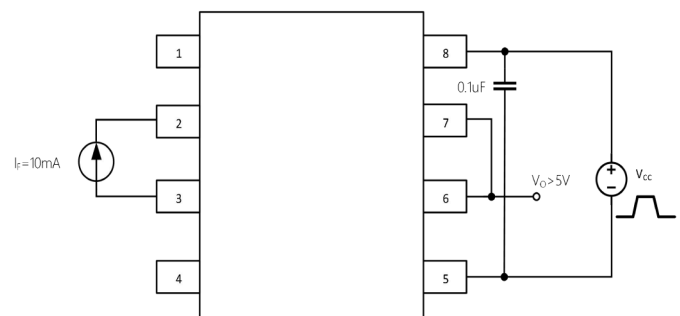

12.1 DIP-8 Package Outline Dimensions

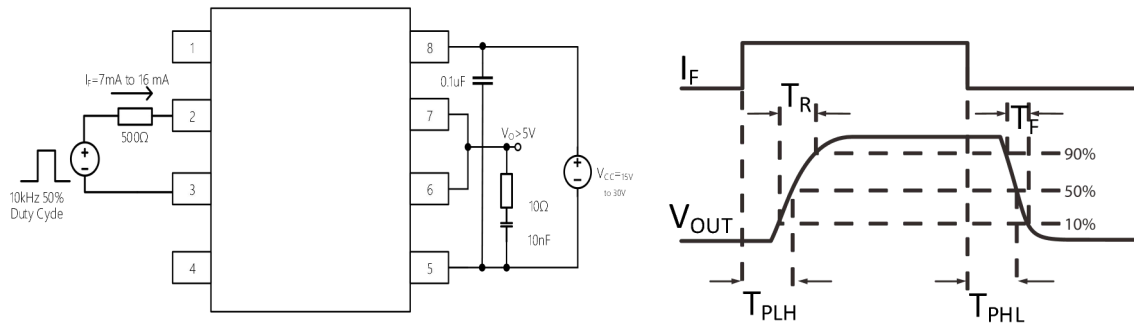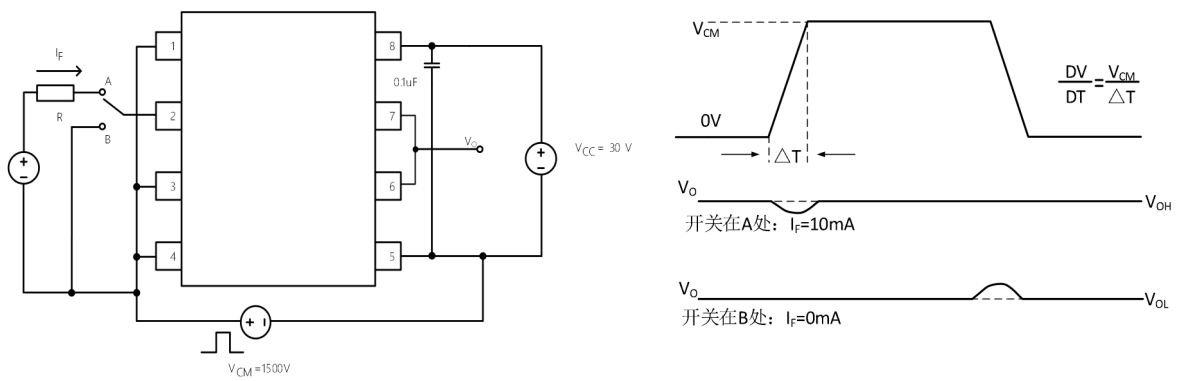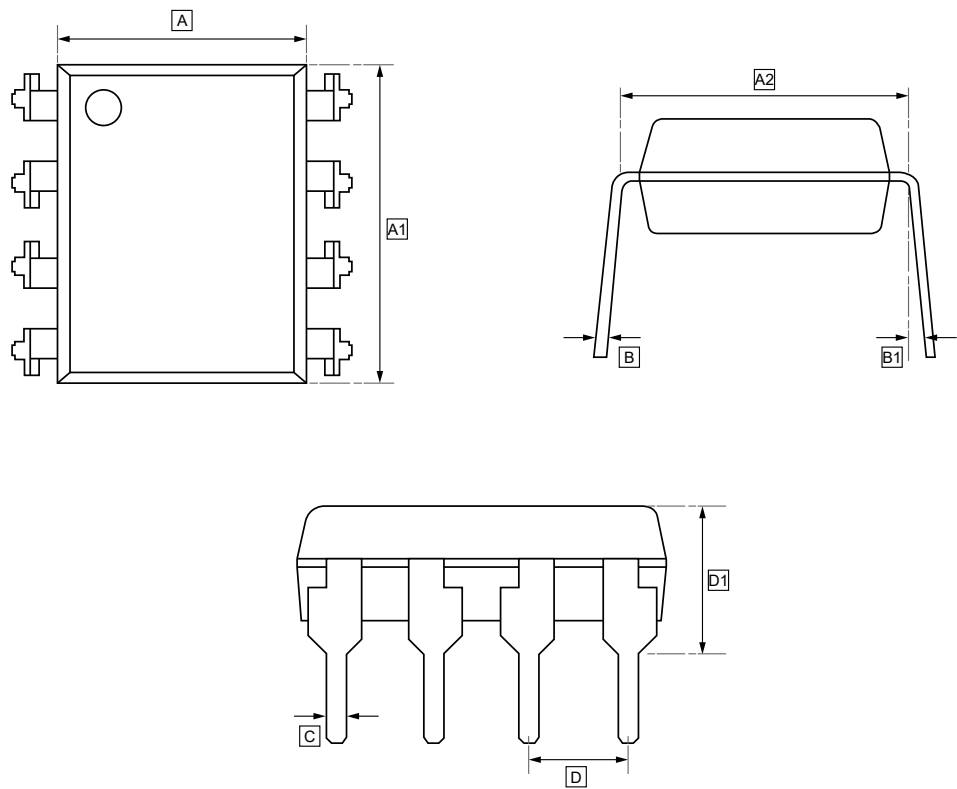


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	B	B1	C	D	D1
Min	6.30	9.46	7.62	0.25	5°	0.40	2.54	4.20
Max	6.90	10.06	TYP.		15°	0.60	TYP.	4.80



12.2 SOP-8 Package Outline Dimensions

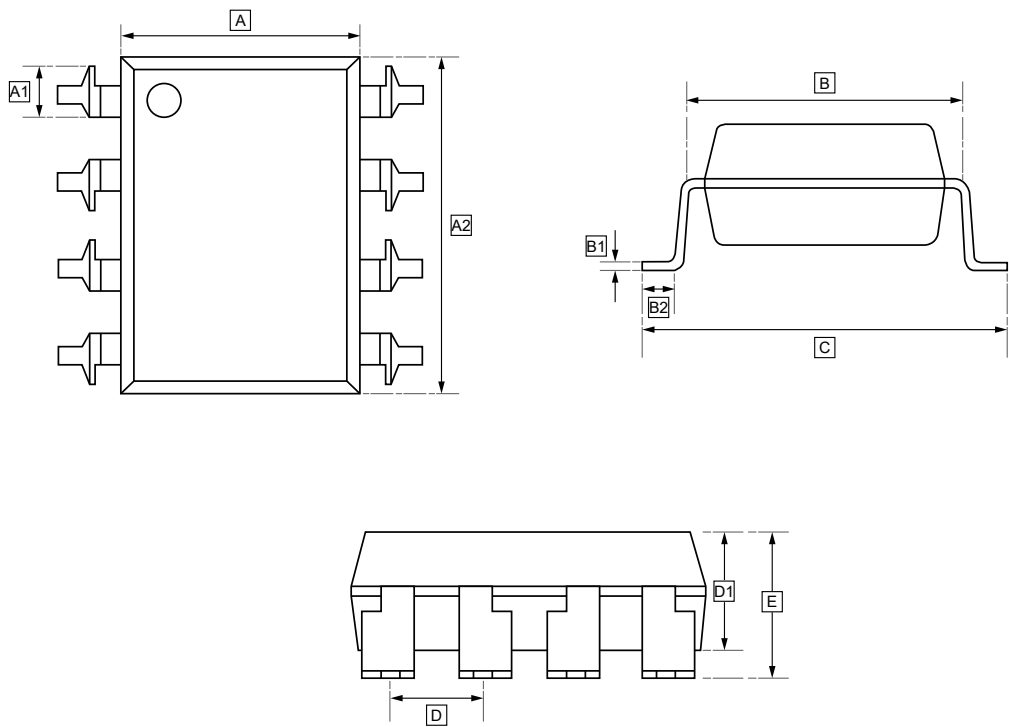


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	B	B1	B2	C	D	D1	E
Min	6.30	1.45	9.46	7.62	0.25	0.6	-	2.54	3.20	4.00
Max	6.90		10.06	TYP		-	10.3	TYP	3.80	4.60



13.Ordering Information



yy: Year Code
ww: Week Code

Order Code	Marking	Package	Base QTY	Delivery Mode
UMW FOD3150	FOD3150	DIP-8	2250	Tube and box
UMW FOD3150S	FOD3150S	SOP-8	1000	Tape and reel



14.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.