



Product packaging logic diagram




DIP8



SMD8

Features

- Normally open, single pole single throw
- Control 600VAC or DC voltage
- High isolation voltage between input and output (Viso =5000V rms)
- High sensitivity, low ON resistance
- Low-level off-state leakage current
- Operating Temperature: -40°C~85°C
- Environmentally friendly products, compliant with CQC, UL, and VDE requirements

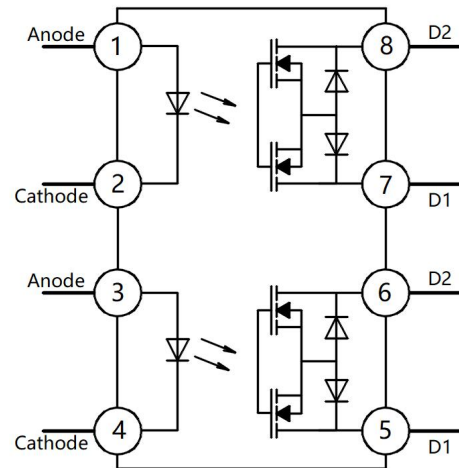

Pin Configuration

Mechanical Data

- Case: DIP8、SMD8
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solder ability-per MIL-STD-202, Method 208

Applications

- In industrial control systems, optocoupler relays are commonly used for the control and monitoring of machinery and equipment.
- In household appliances and consumer electronics, optocoupler relays are used for power Management. Overcurrent protection and safe isolation between devices
- In the field of communications, optocoupler relays are used for data transmission, signal amplification, and signal isolation.
- In medical electronic devices, optical couplers are used for electrical isolation and signal transmission. to ensure the safety of patients and operators
- Optocoupler relays are used in automotive electronic systems to control various onboard devices. Improve system stability and security
- In the field of new energy,Battery management system for electric vehicles(BMS),For detection and troubleshooting.



Ordering Information


<u>XL</u>	<u>860</u>	<u>(M)</u>	<u>(G)</u>	-	<u>(U)</u>	<u>(N)</u>	<u>(Y)</u>
①	②	③	④		⑤	⑥	⑦

- ① Brand(XL)
 ② Product series(860)
 ③ Package type(DIP8:None; SMD8:A)
 ④ Halogen option (None : Halogen free)
 ⑤ Lead frame (None: Copper)
 ⑥ Customer option 1 (0-9 or A-Z or none)
 ⑦ Customer option 2 (0-9 or A-Z or none)

Part Number	Package	Shipping Quantity	Marking Code
XL860	DIP8	45pcs/Tube	XL860
XL860A	SMD8	1000pcs / Tape & Reel	XL860

Marking Information

- " XL " denotes brand.
- " 860 " denotes Product series
- " Y " denotes Year : A(2024), B(2025), C(2026)
- " WW " denotes Week' s number .
- " N " denotes the day of Week.

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter		Symbol	Value	Unit
Input	Forward Current	I _F	50	mA
	Peak Forward Current *1	I _{FP}	1	A
	Reverse Voltage	V _R	5	V
	Power Dissipation	P _D	75	mW
Output	Load Voltage (peak AC)	V _L	600	V
	Continuous load current (peak AC)	I _L	0.04	A
	Peak load current*2	I _{peak}	0.15	A
	Power Dissipation	P _{out}	800	mW

Thermal Characteristics

Parameter	Symbol	Value	Unit
Isolation Voltage ^{*3}	V _{ISO}	5000	V _{rms}
Operating Temperature	T _{OPR}	-40 ~ +85	°C
Storage Temperature Range	T _{STG}	-40 ~ +100	°C

Notes:

1. Pulse width ≤ 1μs, Duty ratio: 0.001
2. 100 ms (1 shot), V_L = DC
3. 40 to 60% RH, AC for 1 minute

Electrical Characteristics (@ T_A = 25°C unless otherwise specified)

Parameter		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input	LED turn on current	I _{Fon}	I _L =0.04A	-	0.4	3	mA
	LED turn off current	I _{Foff}	I _L =0.04A	0	0.3	-	mA
	LED dropout voltage	V _F	I _F =5mA	1	1.3	1.4	V
Output	On resistance	R _{on}	I _F =5mA, I _L =0.04A, Within 1s on time	-	36	120	Ω
	Off state leakage current	I _{Leak}	I _F =0mA, V _L =600V	-	-	1000	nA
Transfer Characteristics	Turn on time	T _{on}	I _F =5mA, I _L =0.04A	20	120	2000	us
	Turn off time	T _{off}	I _F =5mA, I _L =0.04A	10	350	1000	us
	I/O capacitance	C _{iso}	f=1MHz, V _B =0		0.8	1.5	pF
	Initial I/O isolation resistance	R _{iso}	500V DC	1,000	-	-	MΩ

Note:

Recommended LED Forward Current I_F=5 to 10mA.

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Fig.1 Load current vs. Ambient temperature characteristics

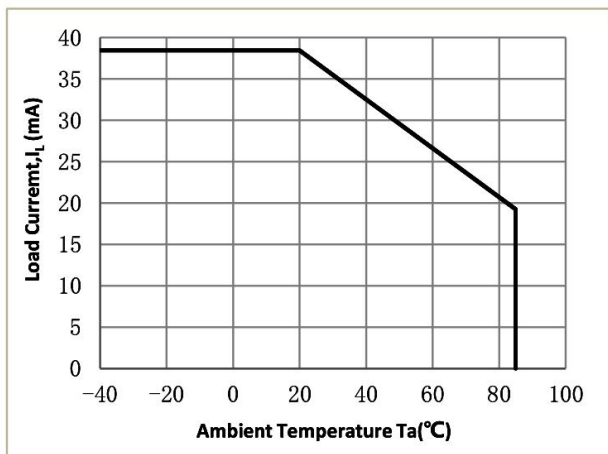


Fig.2 On resistance vs. Ambient temperature characteristics

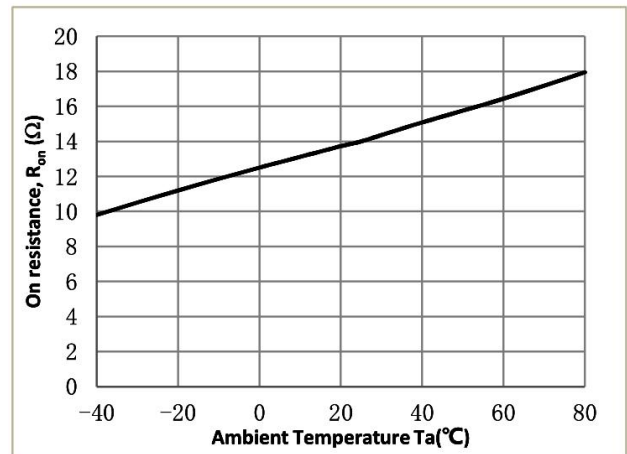


Fig.3 Turn on time vs. Ambient temperature characteristics

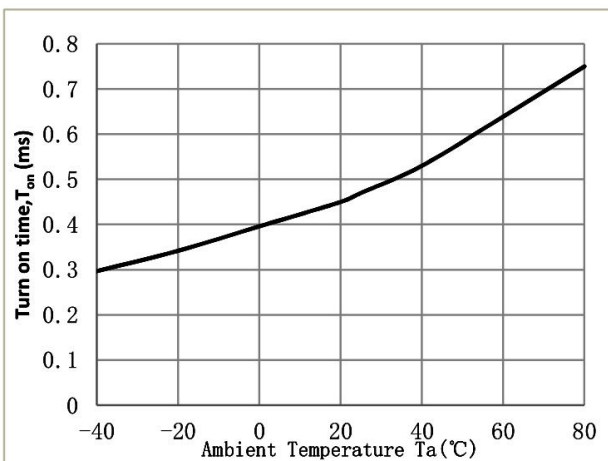


Fig.4 Turn off time vs. Ambient temperature characteristics

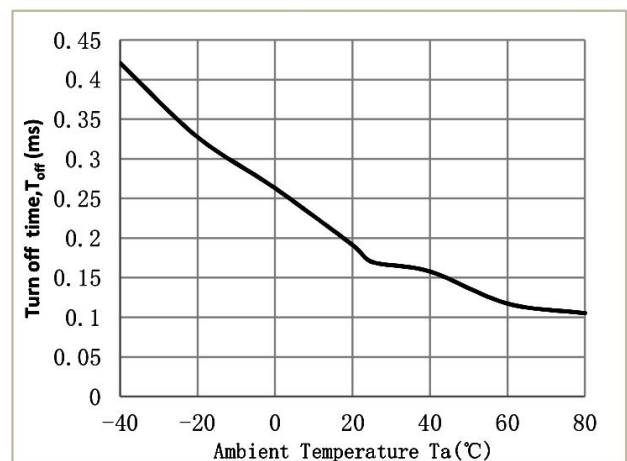


Fig.5 LED turn on current vs. Ambient temperature characteristics


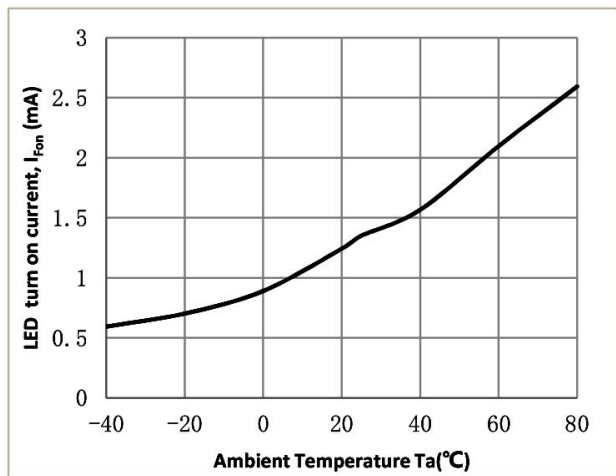


Fig.6 LED turn off current vs. Ambient temperature characteristics

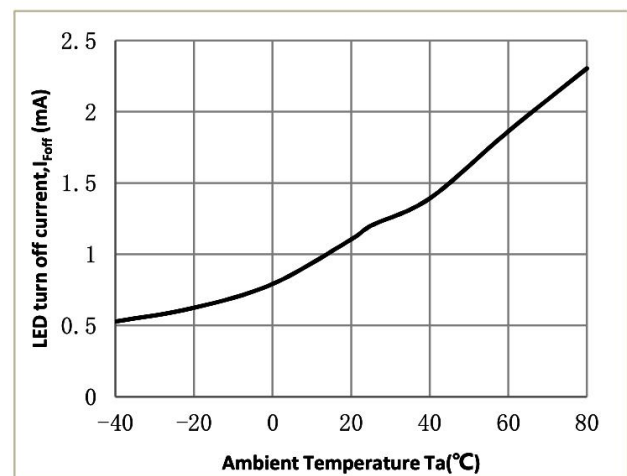

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Fig.7 LED dropout voltage vs. Ambient temperature characteristics

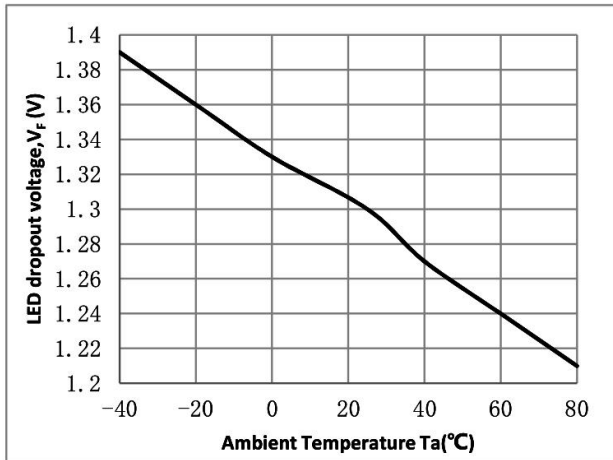


Fig.8 Output current vs Output voltage

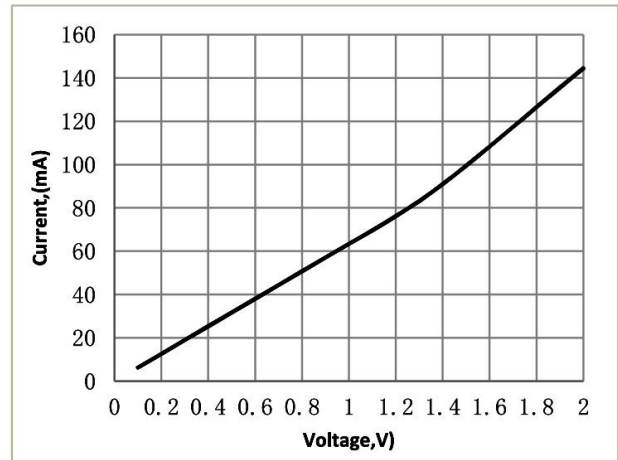


Fig.9 Off state leakage current vs Load voltage characteristics

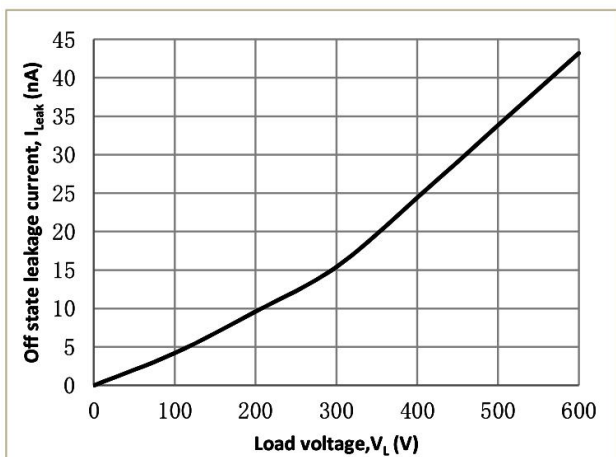


Fig.10 LED turn on time vs Forward current characteristics

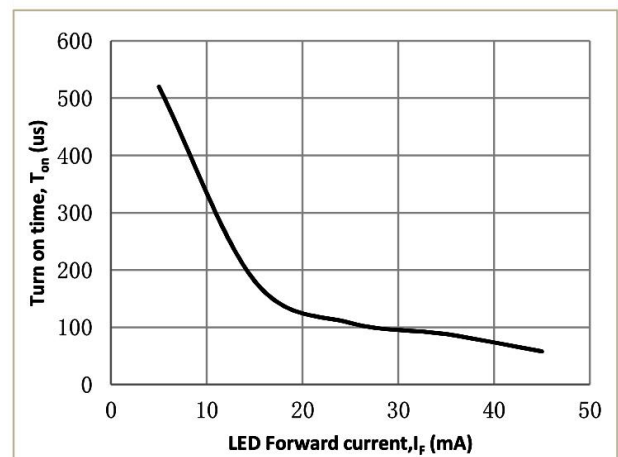


Fig.11 LED turn off time vs Forward current characteristics



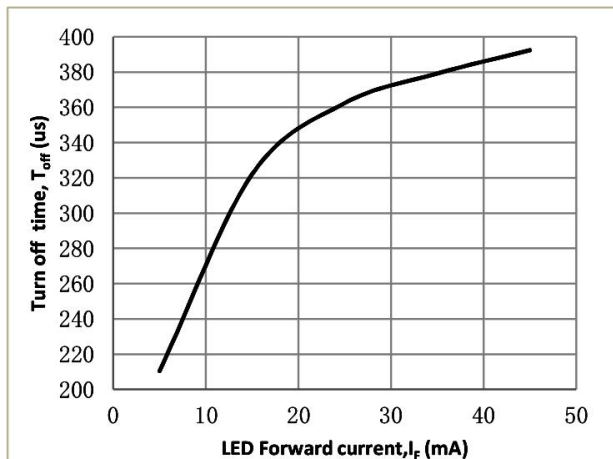


Fig.12 Turn on/off time

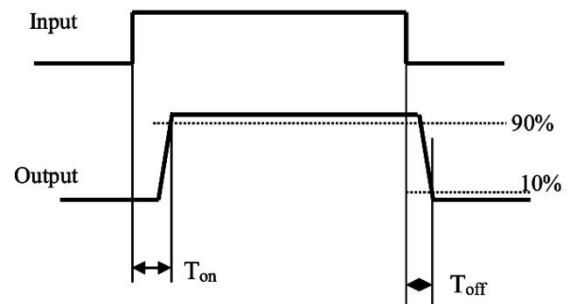


Package Outline Dimensions (unit: mm)


DIP8

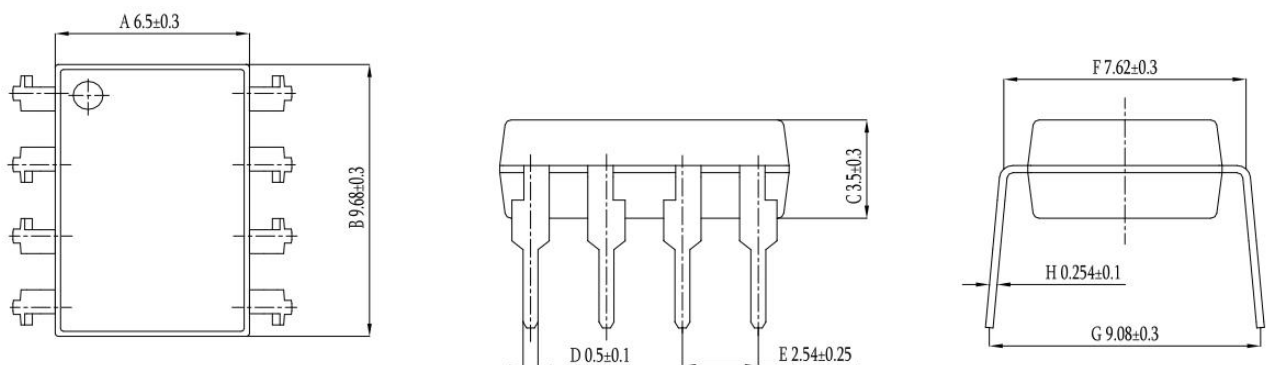


SMD8

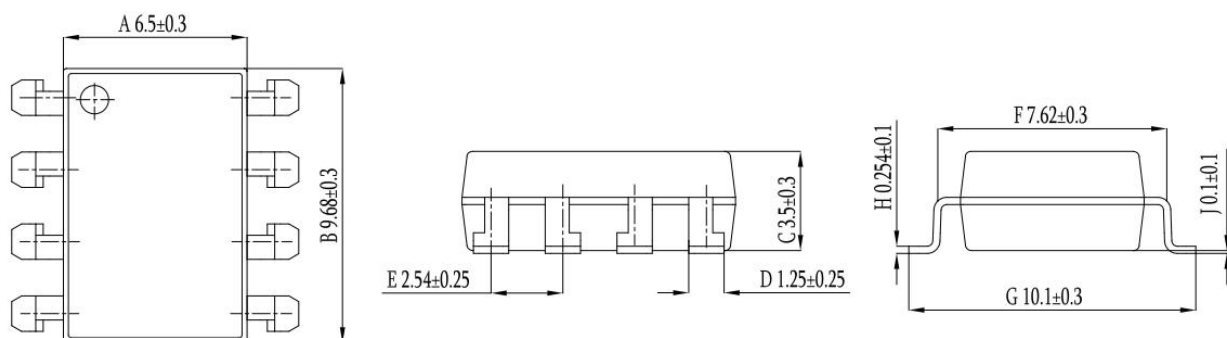

SOLDERING FOOTPRINT (unit: mm)

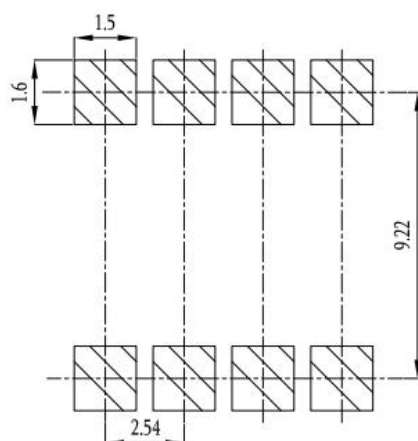


Reflow soldering

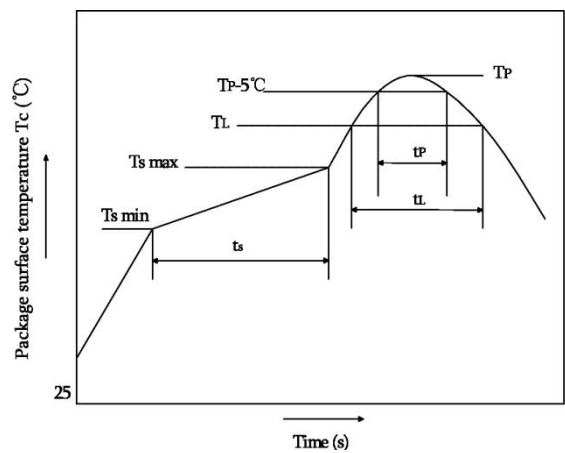

	Symbol	Min	Max	Unit
Preheat temperayure	Ts	150	200	°C
Preheat time	ts	60	120	s
Ramp-up ratea(TL to TP)	-	-	3	°C/s
Liquidus temperature	TL	217		°C
Time above TL	tL	60	150	s
Peak temperature	TP		260	°C
Time during which Tc is between (TP-5) and TP	tP	-	30	s
Ramp-down rate(TP to TL)	-	-	6	°C/s

Note:
Reflow soldering is recommended at the temperatures and times shown, no more than three times.

Wave soldering

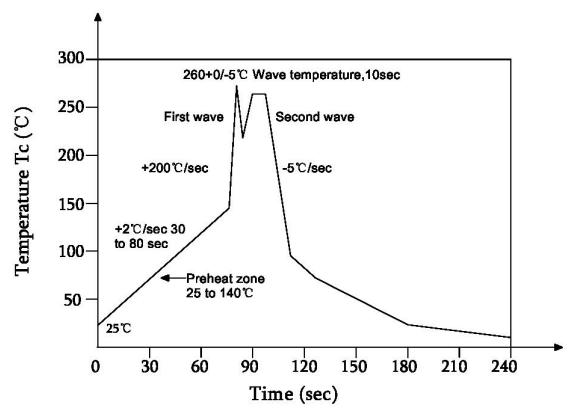

Profile feature	
Average ramp-up rate	~200°C/s
Heating rate during preheat	1°C/s to 2°C/s typical;4°C/s maximum
Final preheat temperature Ts	~130°C
Preheat time (25°C to Ts)	>60s
Peak temperature TP	260°C
Time within peak temperature tP	10s
Ramp-down rate	5°C/s maximum

Soldering with hand soldering iron

- A. Hand soldering iron is only used for product rework or sample testing.
- B. Hand soldering iron requirements:Temperature:360 °C+5°C within 3s.

Packing

Package Type	Packing Form	Quantity per Tube & Reel	Quantity per Box	Quantity per Carton	Antistatic Bag Specification	Box Specification	Carton Specification	Note
DIP8	Tube(500mm)	45pcs/tube	25 tubes /box	12 boxes /ctn	190*670mm	520*105*50mm	545*372*235mm	Straight insert type material tube
SMD8	Reel(φ330mm)	1000pcs/reel	2 reels /box	5 boxes /ctn	380*420mm	350*340*60mm	365*330*370mm	Guard band 200mm /min.

■ Summary table

■ DIP8 (Tube)

Qty/tube: 45pcs. Qty/box: 1125pcs.

Qty/ctn : 13500pcs.


Schematic: (unit:mm)

■ SMD8 (Reel)

Qty/reel: 1000pcs. Qty/box: 2000pcs.

Qty/ctn : 10000pcs.

Schematic: (unit:mm)

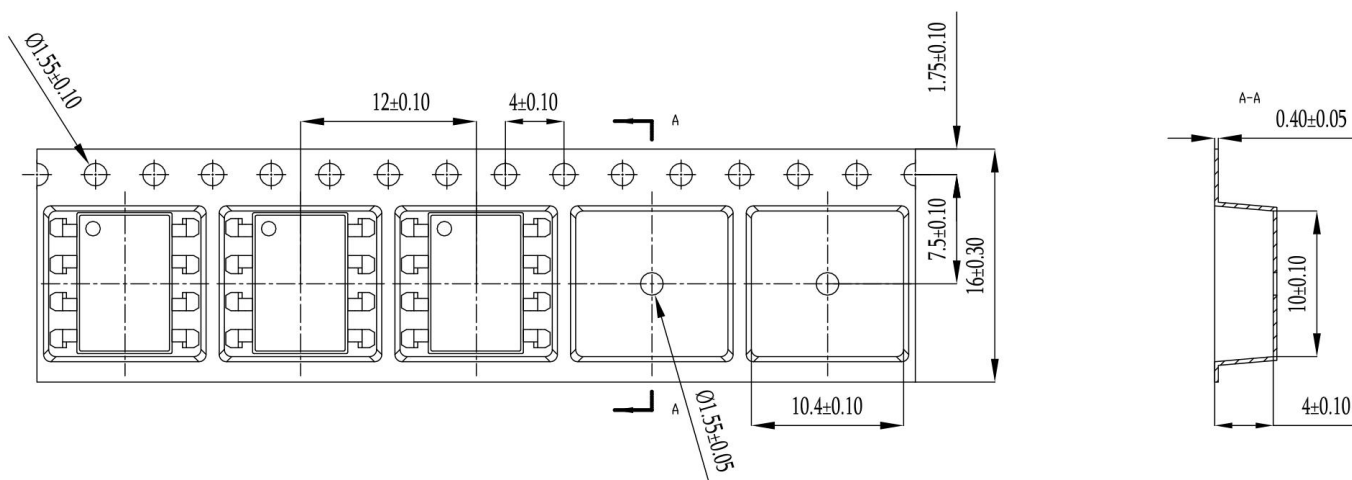

IMPORTANT NOTICE

XINGLIGHT reserves the right to make changes without further notice to any product herein to make corrections, modifications, improvements, or other changes. XINGLIGHT does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.