
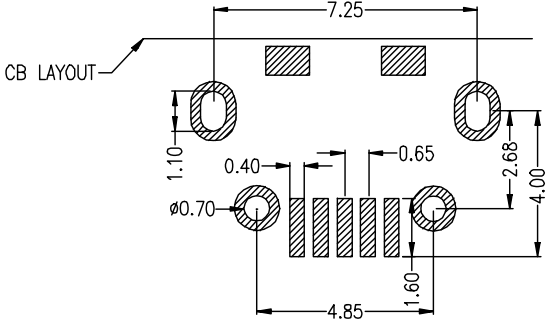



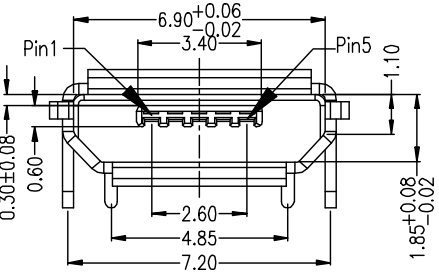



REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

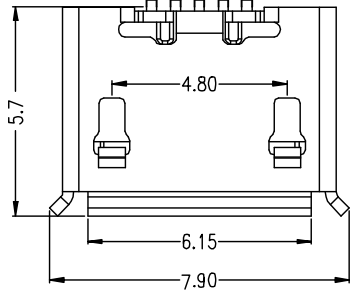

- Specifications:**
- 1. Electrical:**
 - 1.1 Current Rating:1.8A/contact terminal
 - 1.2 Voltage Rating:30V DC
 - 1.3 Contact Resistance:50 milliohms Max
 - 1.4 Dielectnic Withstanding Voitage:300 V AC AT Sea Level
 - 1.5 Insulation resistance:100MEGA ohms MIN
 - 2. Mechanical:**
 - 2.1 Cnector Mate and Unmate Force
 - Mate force:3.0kgf(Max)
 - Unmate force:0.7kgf(MIN)
 - 2.2 Durability:2000 cycles
 - 3. Matorial:**
 - 3.1 Housing:
 - Hing Temperature Tnermaplastics, U1 94V-0 LCP Black
 - 3.2 Contact C5191-EH
 - 3.3 Shell: H65 EH0.3MM
 - 4. PLATING:**
 - 4.1 Contact: Plated Gold in Mating Area; Tin On Solder Talls
 - 4.2 Shell:Nickel 50u"Min Plated.

PART NO: A01SBXXXXXX1-067		MATERIAL		浙江创都电子科技有限公司	
MODEL NO: XX		FINSH:			
UNIT: MM	SIZE: A4	COLOR:		TITLE: MicroXNJ-JB-SJ-WCZ MIRCO USB 5S B TYPE 四脚全插(牛角型)短针	
TOLERANCE UNSPECIFIED .x 0.25 .xx 0.15 .xxx 0.10 Ang. 2°		DR:		DWG NO: A067	
		CHK:		REV: A	
		APP:		SCALE: 5:1	
				DATE: 2012.05.02	
					