Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

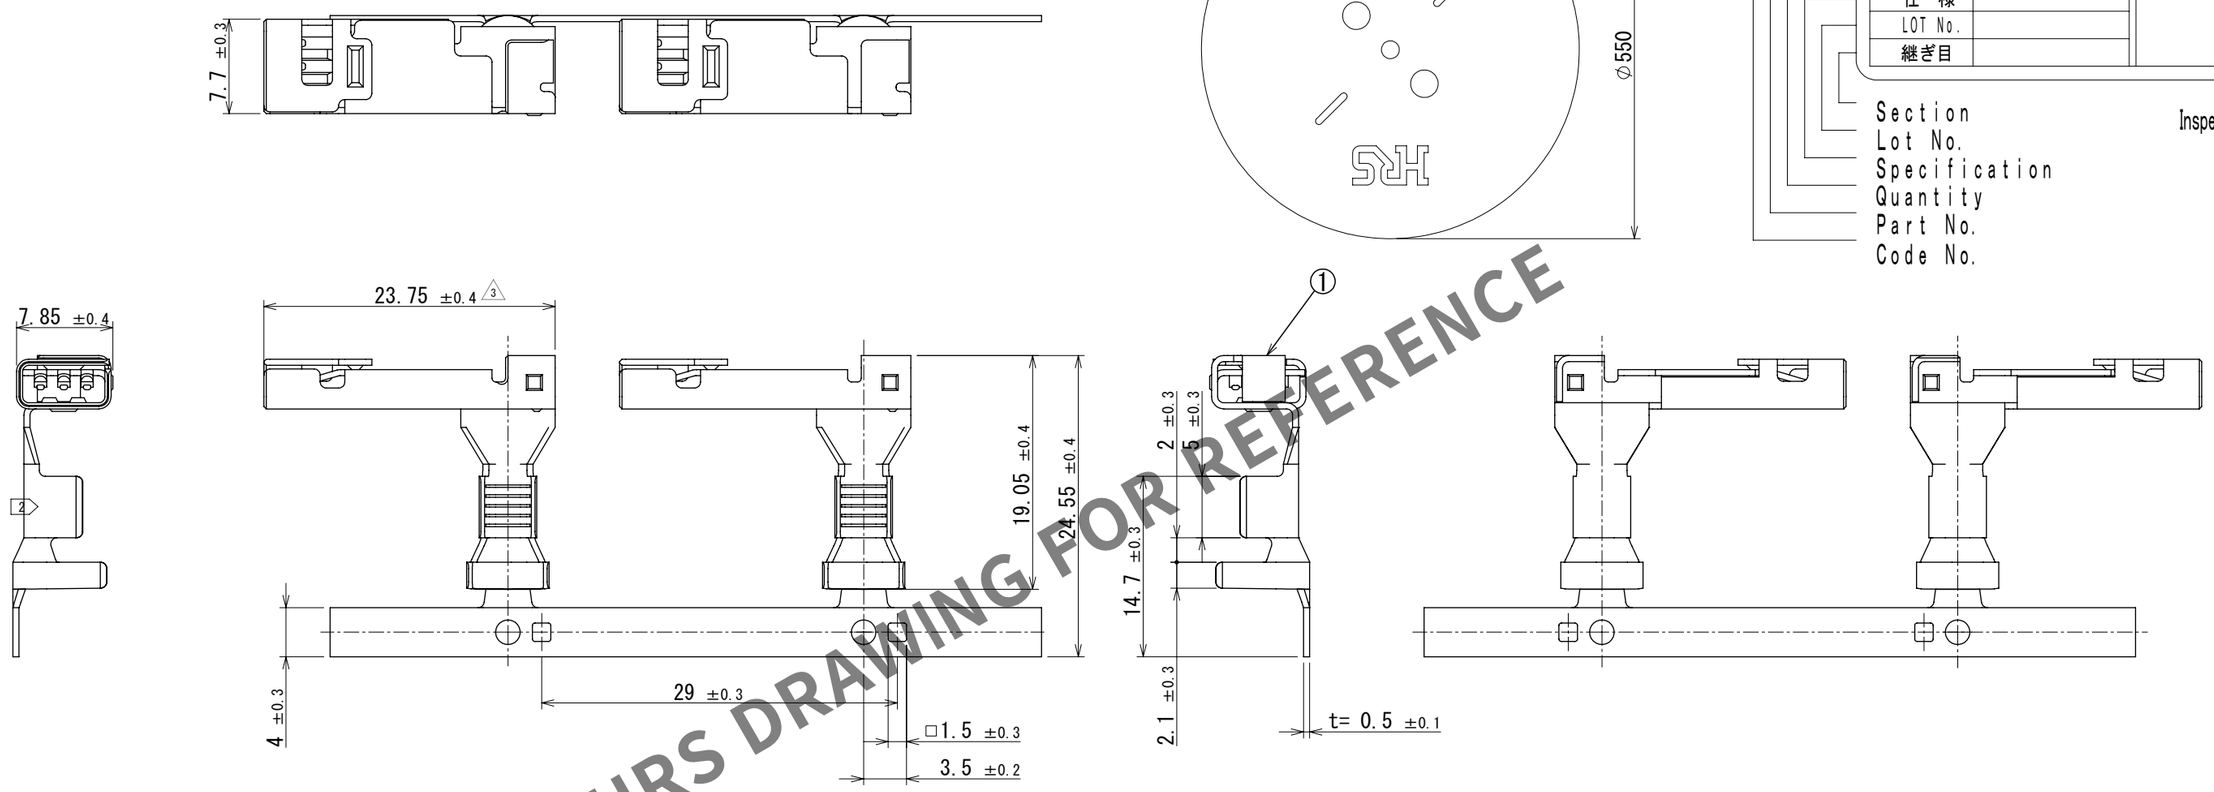

HRS DRAWING FOR REFERENCE

Note 1. 1RL:800 Contacts.
2. Style of reelshows in figure.
3. Please make sure to check ths form of crimping using a cable in adusting an applicator.
4. Applicable cable is 10-12 AWG.
5. Refer to the technical specification (ETAP-H0824-00) for the packing type.
6. Please refer to the technical specification (ETAD-H0654-00, ETAD-H0653-00, ETAD-H1042-00) for handling.

NO.	MATERIAL	FINISH , REMARKS
1	Copper alloy	Contact area : Au plating 0.2μm min Wire barrel area : Sn plating 1 μm min Under plating : Ni plating 1 μm min

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2:1	1	DIS-H-00022959	SN. MIWA	TT. OHSAKO	2025. 04. 08

HRS HIROSE ELECTRIC CO., LTD.

APPROVED	: SJ. OKAMURA	2023. 10. 19
CHECKED	: TT. OHSAKO	2023. 10. 19
DESIGNED	: KT. NUMATA	2023. 10. 18
DRAWN	: SK. CHIBA	2023. 10. 18

DRAWING NO. EDC-402623-00-00
PART NO. DF60S-1012SCFA
CODE NO. CL0680-3082-0-00
1/1

FORM HC0011-5