



Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

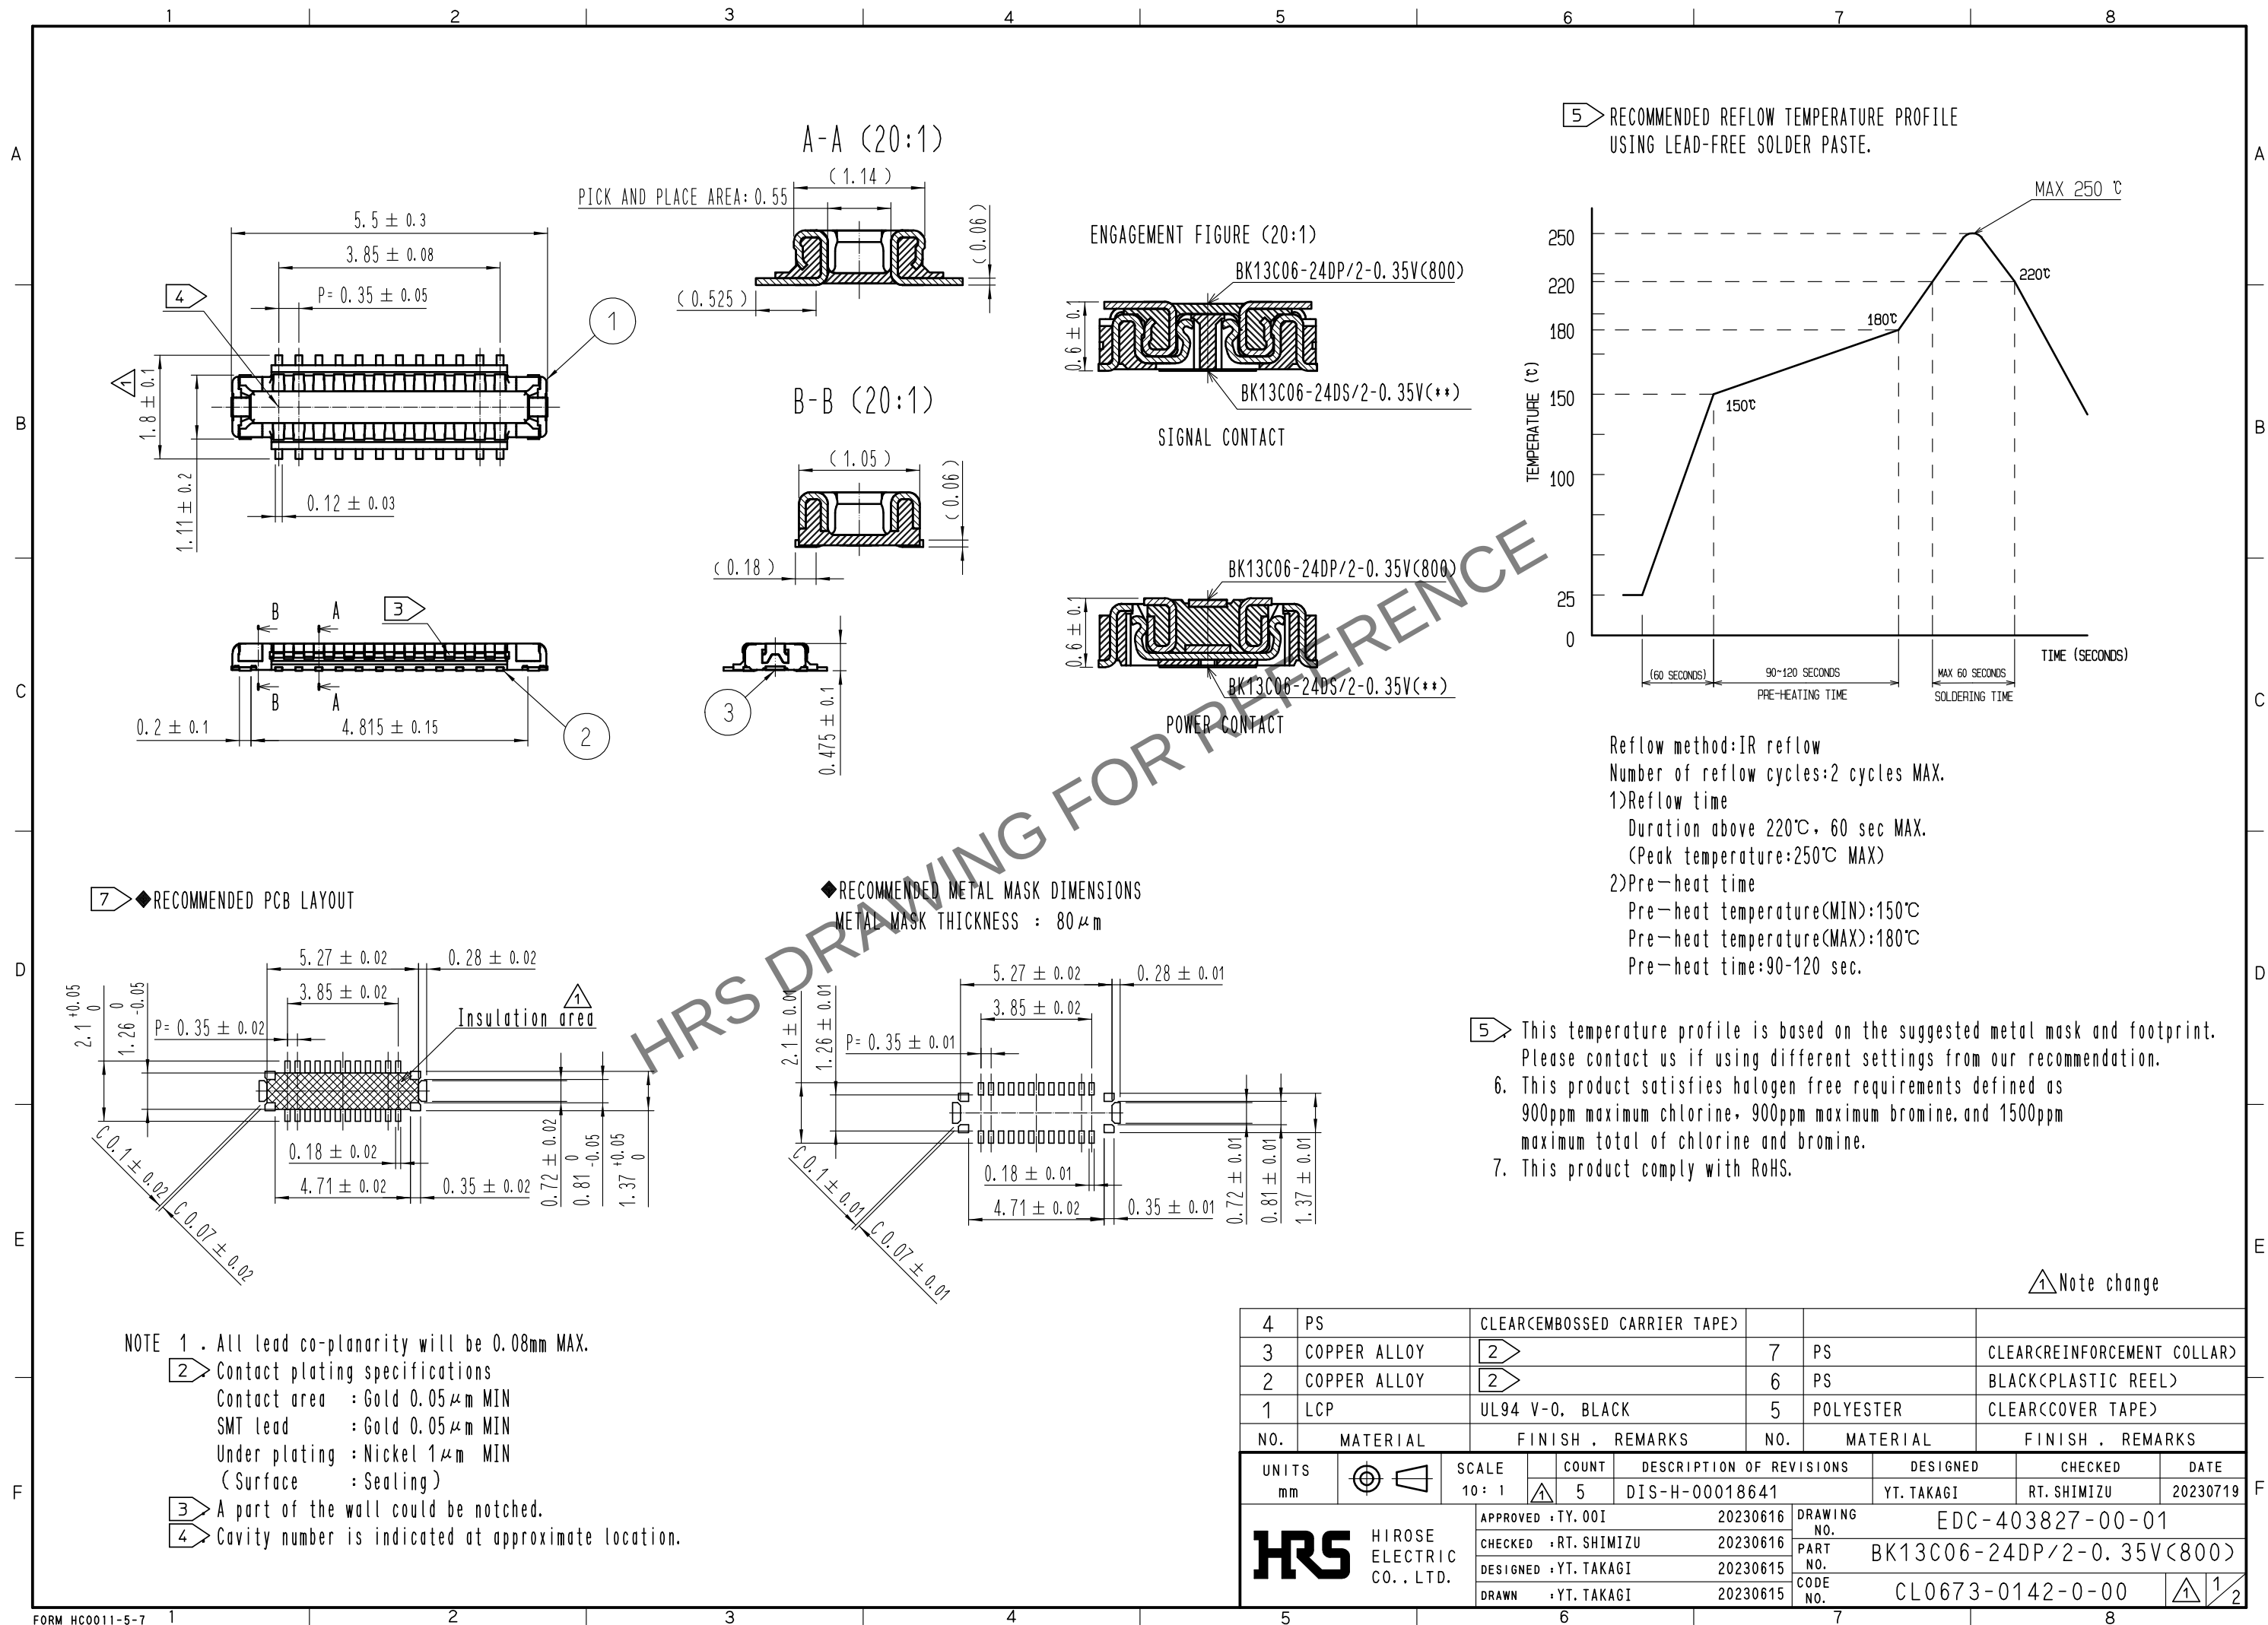


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EMBOSSED CARRIER TAPE PACKAGING (5:1)


STYLE AND DIMENSION OF REEL (FREE)

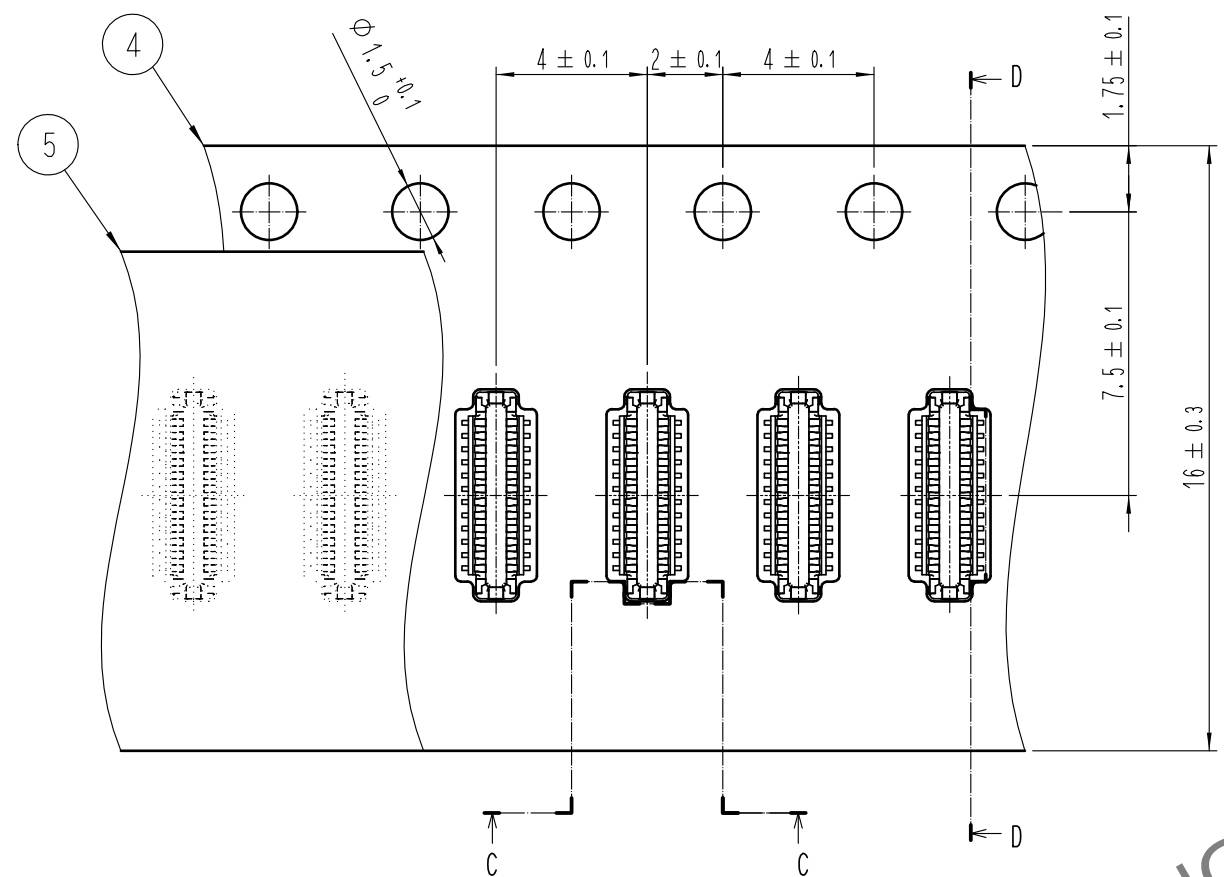



D-D (5:1)

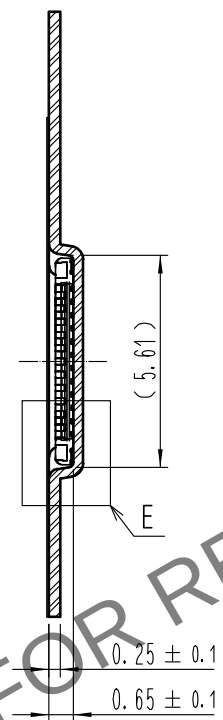


C-C (5:1)





DIRECTION OF UNREELING

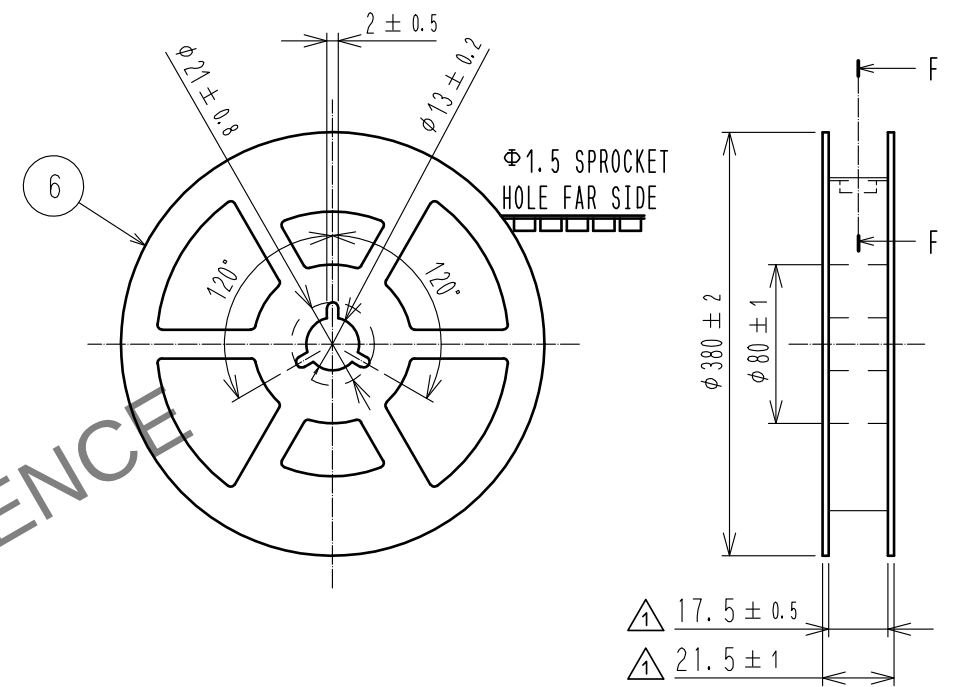

F-F (FREE)

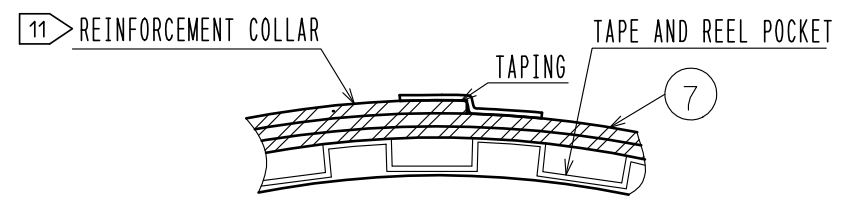

E (10:1)

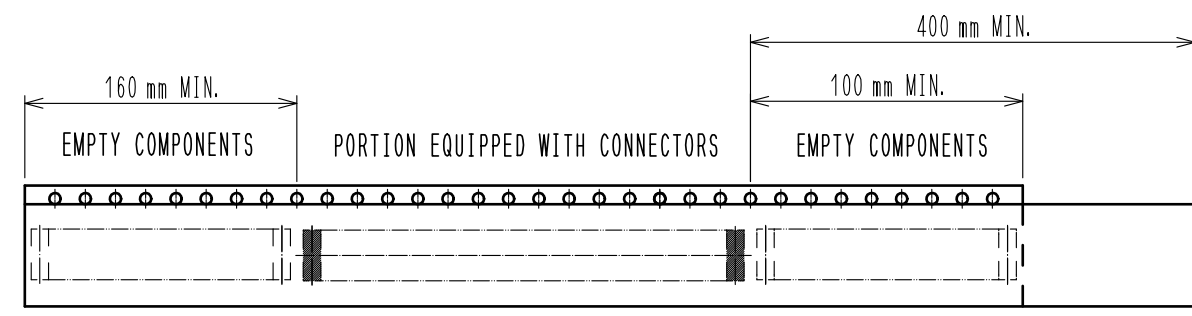

TRAILER

10 TAPING(FREE)

LEADER

- 8 . 20,000 connectors per reel.
- 9 . The dimensions in parentheses are for reference.
- 10 . Refer to IEC 60286-3 (packaging of components for automatic handling)
- 11 . The reinforcing collar is wrapped around the emboss tape and taped down at the end of the collar.

HRS	DRAWING NO.	EDC-403827-00-01		
	PART NO.	BK13C06-24DP/2-0.35V(800)		
	CODE NO.	CL0673-0142-0-00	1	2/2