




Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

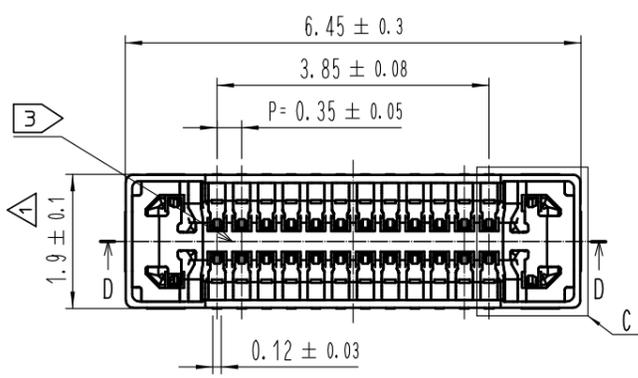






A-A (20:1)

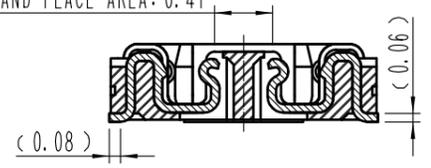

B-B (20:1)

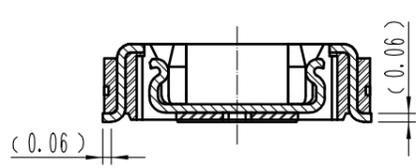


ENGAGEMENT FIGURE (20:1)

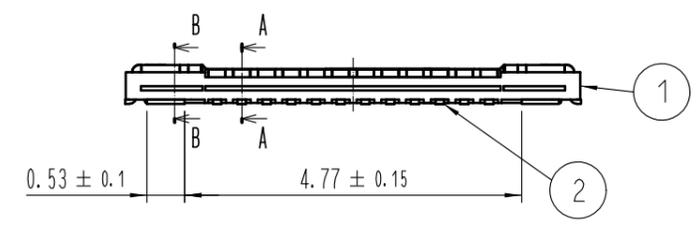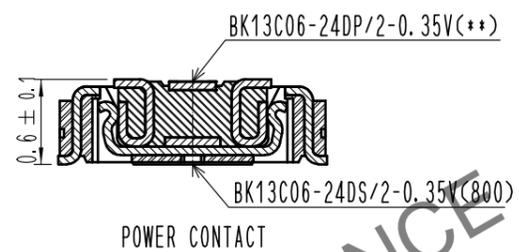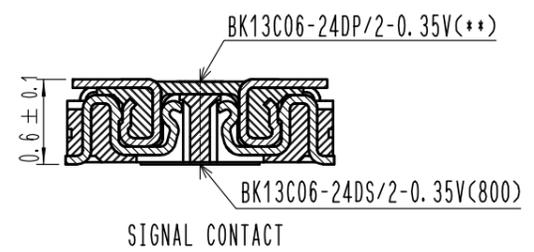


- NOTE 1. All lead co-planarity will be 0.08mm MAX.
 2 Contact plating specifications
 Contact area : Gold 0.05μm MIN
 SMT lead : Gold 0.05μm MIN
 Under plating : Nickel 1μm MIN
 (Surface : Sealing)
 3 Cavity number is indicated at approximate location.
 4 There is also the shape as indicated.

5 RECOMMENDED REFLOW TEMPERATURE PROFILE USING LEAD-FREE SOLDER PASTE.

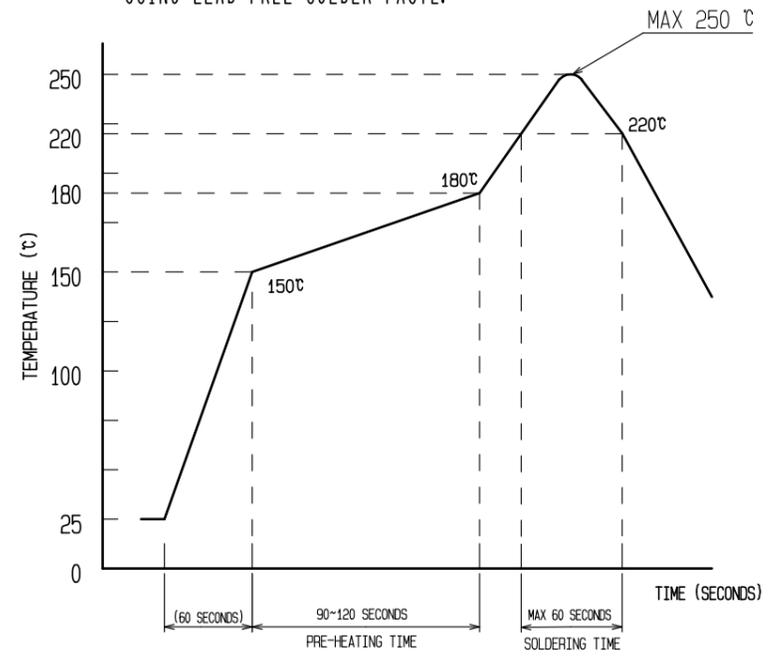


Reflow method: IR reflow
 Number of reflow cycles: 2 cycles MAX.
 1) Reflow time
 Duration above 220°C, 60 sec MAX.
 (Peak temperature: 250°C MAX)
 2) Pre-heat time
 Pre-heat temperature (MIN): 150°C
 Pre-heat temperature (MAX): 180°C
 Pre-heat time: 90-120 sec.

6 RECOMMENDED PCB LAYOUT

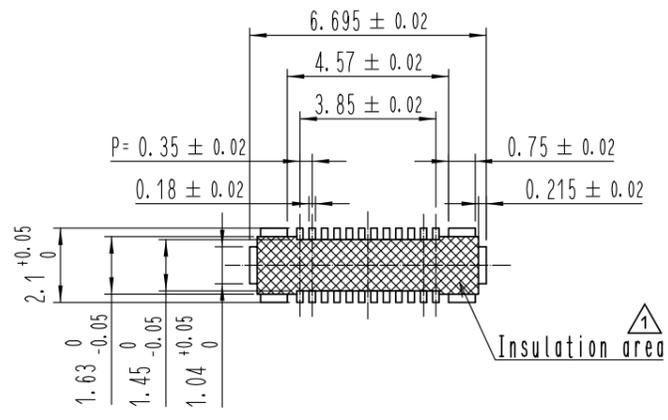

RECOMMENDED METAL MASK DIMENSIONS

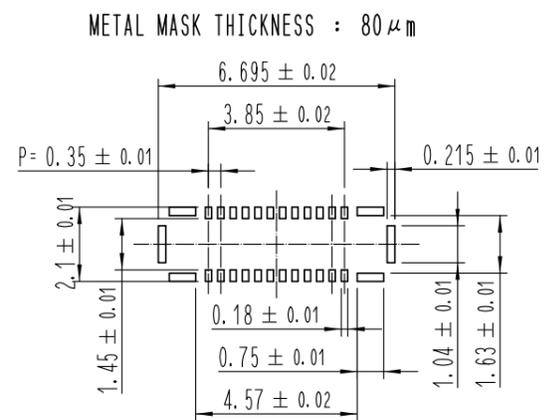


- 5 This temperature profile is based on the suggested metal mask and footprint. Please contact us if using different settings from our recommendation.
 6. This product satisfies halogen free requirements defined as 900ppm maximum chlorine, 900ppm maximum bromine, and 1500ppm maximum total of chlorine and bromine.
 7. This product comply with RoHS.

Note change


4	PS	CLEAR(EMBOSSED CARRIER TAPE)			
3	COPPER ALLOY	2	7	PS	CLEAR (REINFORCEMENT COLLAR)
2	COPPER ALLOY	2	6	PS	BLACK (PLASTIC REEL)
1	LCP	UL94 V-0, BLACK	5	POLYESTER	CLEAR (COVER TAPE)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	mm	SCALE	10 : 1	COUNT	5
		DESCRIPTION OF REVISIONS		DESIGNED	Y.T. TAKAGI
		DIS-H-00018641		CHECKED	RT. SHIMIZU
		DATE		20230719	
APPROVED : TY. 001			20230616		
CHECED : RT. SHIMIZU			20230616		
DESIGNED : YT. TAKAGI			20230615		
DRAWN : YT. TAKAGI			20230615		
DRAWING NO.			EDC-403828-00-01		
PART NO.			BK13C06-24DS/2-0.35V(800)		
CODE NO.			CL0673-0143-0-00		
			1/2		

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


EMBOSSED CARRIER TAPE PACKAGING (5:1)

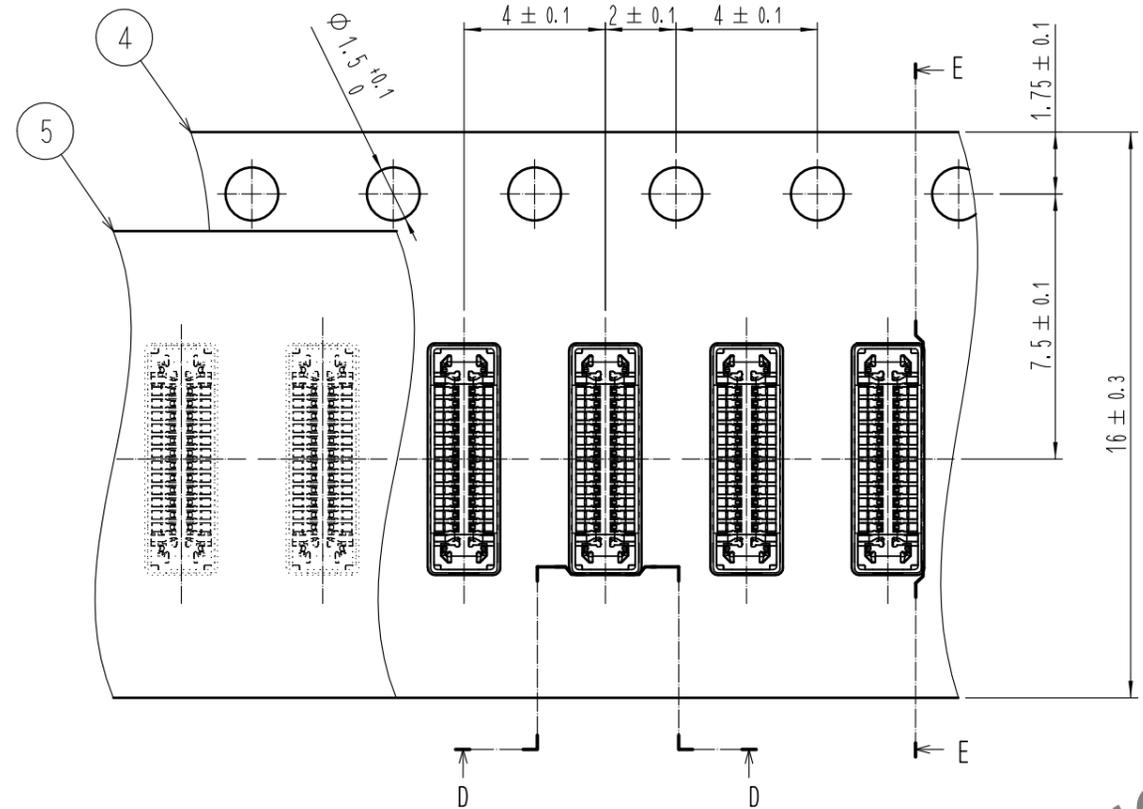



D-D (5:1)





E-E (5:1)

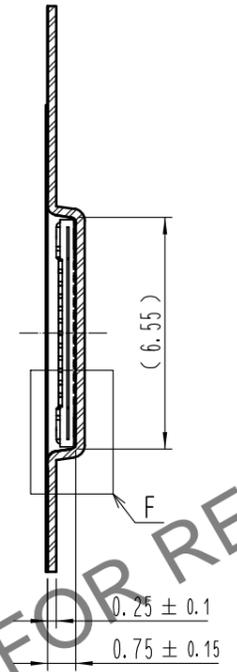

F (10:1)

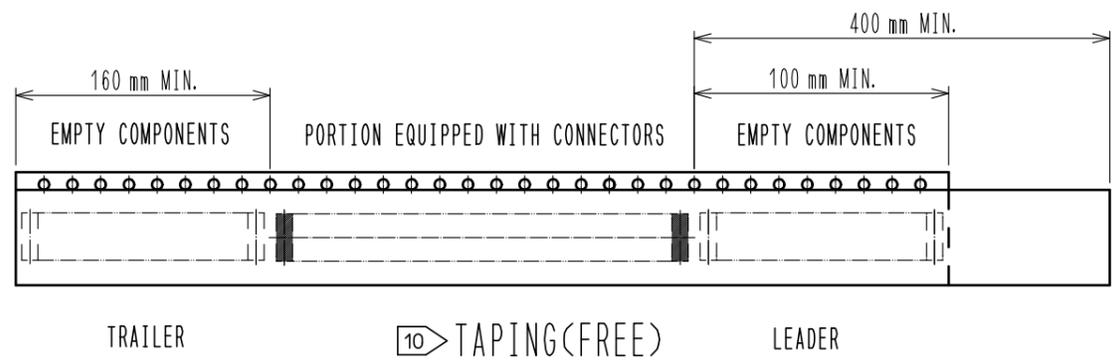

STYLE AND DIMENSION OF REEL (FREE)

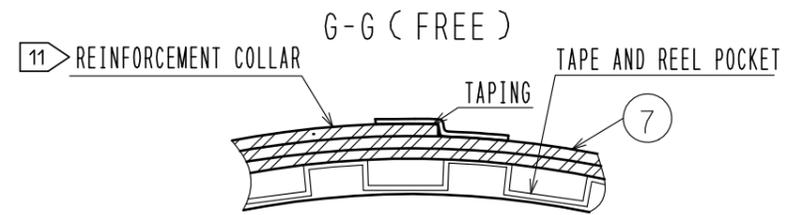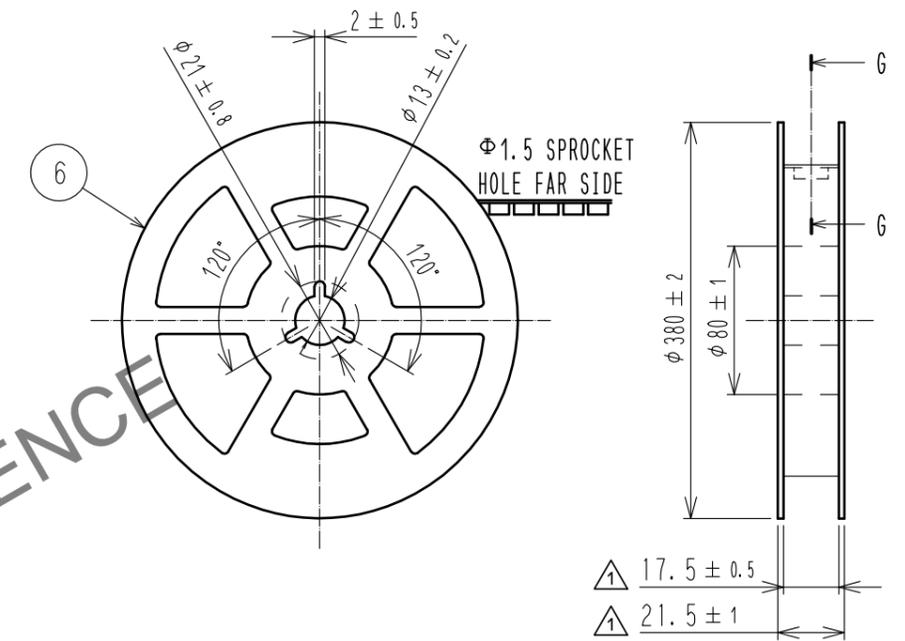

- 8 . 20,000 connectors per reel.
- 9 . The dimensions in parentheses are for reference.
- 10 . Refer to IEC 60286-3 (packaging of components for automatic handling)
- 11 . The reinforcing collar is wrapped around the emboss tape and taped at the end of the collar.

HRS	DRAWING NO.	EDC-403828-00-01
	PART NO.	BK13C06-24DS/2-0.35V(800)
	CODE NO.	CL0673-0143-0-00
		$\triangle 2/2$