

General Description

The HSBA30P15 uses advanced trench MOSFET technology to provide excellent $R_{DS(ON)}$ and gate charge for use in a wide variety of other applications.

The HSBA30P15 meet the RoHS and Green Product requirement, 100% EAS guaranteed with full function reliability approved.


Product Summary

V_{DS}	-150	V
$R_{DS(ON),typ}$	56	m Ω
I_D	-30	A

Features

- 100% EAS Guaranteed
- Green Device Available
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- Advanced high cell density Trench Technology

PRPAK5*6 Pin Configuration

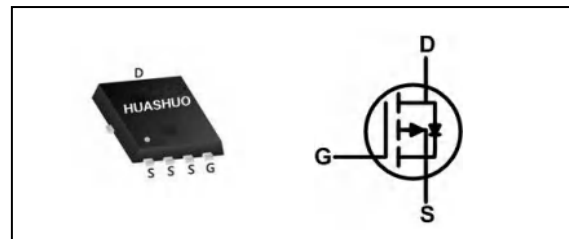

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-150	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D@T_C=25^\circ C$	Continuous Drain Current, $V_{GS} @ -10V^1$	-30	A
$I_D@T_C=100^\circ C$	Continuous Drain Current, $V_{GS} @ -10V^1$	-20	A
I_{DM}	Pulsed Drain Current ²	-100	A
EAS	Single Pulse Avalanche Energy ³	560	mJ
$P_D@T_C=25^\circ C$	Total Power Dissipation ⁴	80	W
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ C$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ C$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient ¹	---	62	$^\circ C/W$
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	1.3	$^\circ C/W$

P-Ch 150V Fast Switching MOSFETs
Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=-250\mu A$	-150	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance ²	$V_{GS}=-10V$, $I_D=-20A$	---	56	70	m Ω
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=-250\mu A$	-2	-3	-4	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=-150V$, $V_{GS}=0V$, $T_J=25^\circ\text{C}$	---	---	-1	μA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=-10V$, $I_D=-20A$	---	14	---	S
Q_g	Total Gate Charge	$V_{DS}=-75V$, $V_{GS}=-10V$, $I_D=-20A$	---	93	---	nC
Q_{gs}	Gate-Source Charge		---	18	---	
Q_{gd}	Gate-Drain Charge		---	14	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=-75V$, $V_{GS}=-10V$, $R_G=3.3\Omega$, $I_D=-20A$	---	63	---	ns
T_r	Rise Time		---	27	---	
$T_{d(off)}$	Turn-Off Delay Time		---	230	---	
T_f	Fall Time		---	80	---	
C_{iss}	Input Capacitance	$V_{DS}=-75V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	5990	---	pF
C_{oss}	Output Capacitance		---	744	---	
C_{rss}	Reverse Transfer Capacitance		---	337	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current ^{1,5}	$V_G=V_D=0V$, Force Current	---	---	-30	A
V_{SD}	Diode Forward Voltage ²	$V_{GS}=0V$, $I_S=-1A$, $T_J=25^\circ\text{C}$	---	---	-1.3	V

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is $V_{DD}=-50V$, $V_{GS}=-10V$, $L=0.1\text{mH}$
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

Figure 1. Output Characteristics

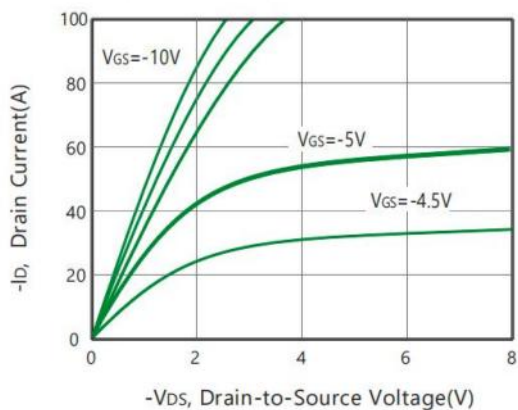


Figure 2. Body Diode Forward Voltage Variation with Source Current

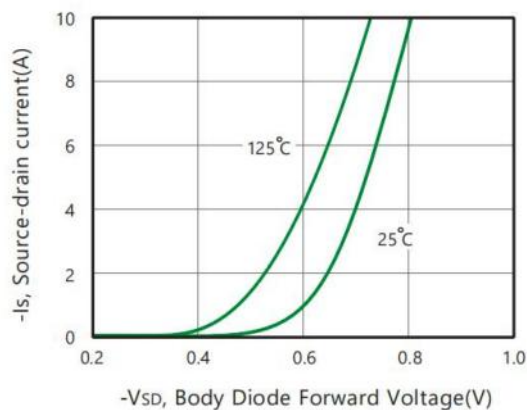


Figure 3. On-Resistance vs. Gate-Source Voltage

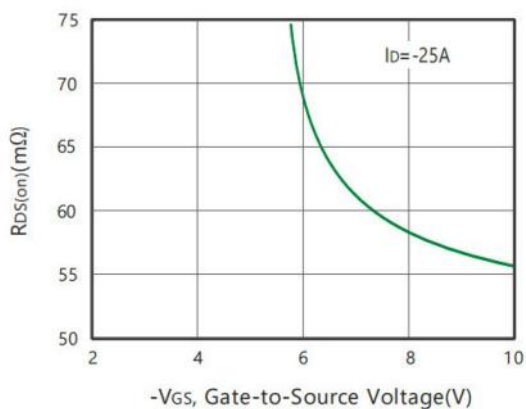


Figure 4. On-Resistance Variation with Drain Current and Temperature

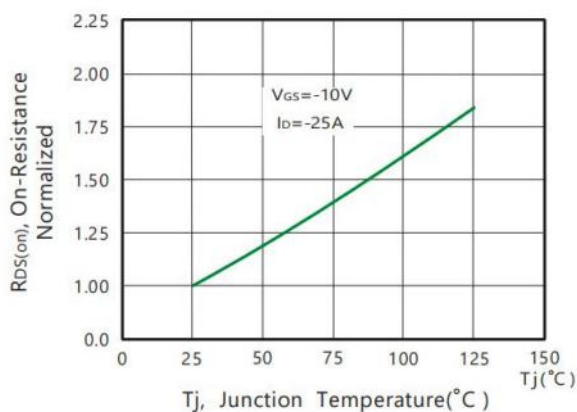


Figure 5. Gate Threshold Variation with Temperature

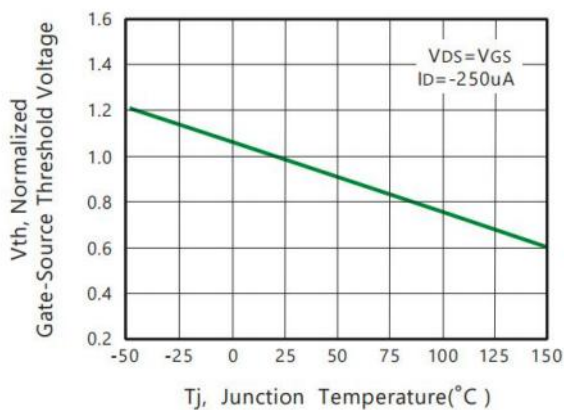


Figure 6. Gate Charge

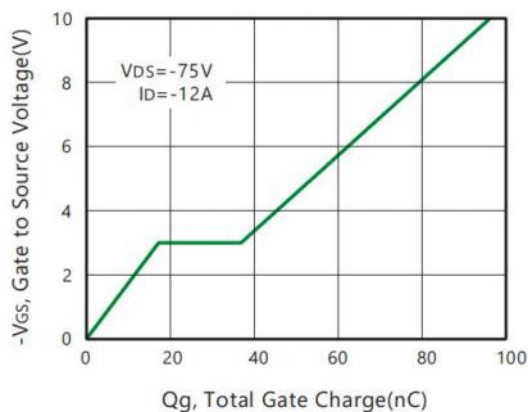




Figure 7. Capacitance

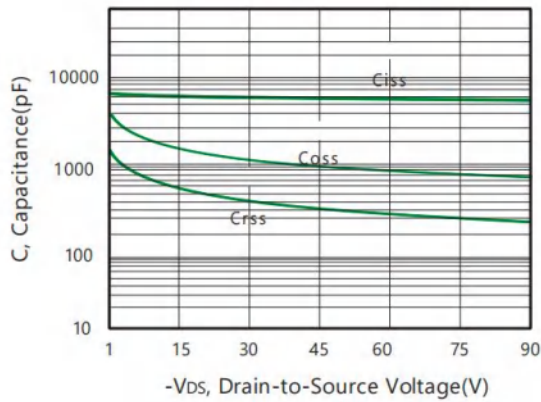


Figure 8. Maximum Safe Operating Area



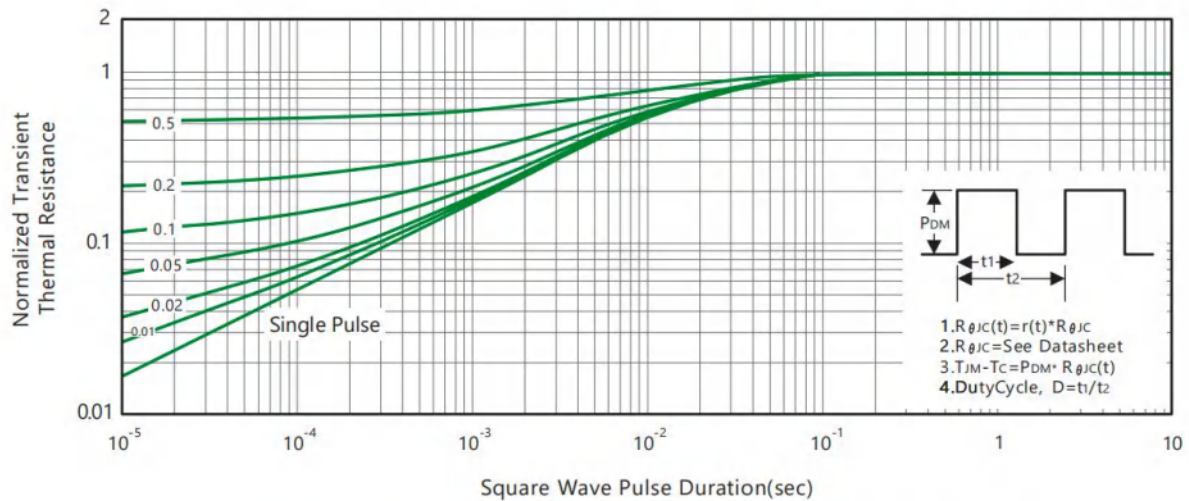


Figure 9. Normalized Thermal Transient Impedance Curve

Ordering Information

Part Number	Package code	Packaging
HSBA30P15	PRPAK5*6	3000/Tape&Reel

PRPAK5*6 Package Outline

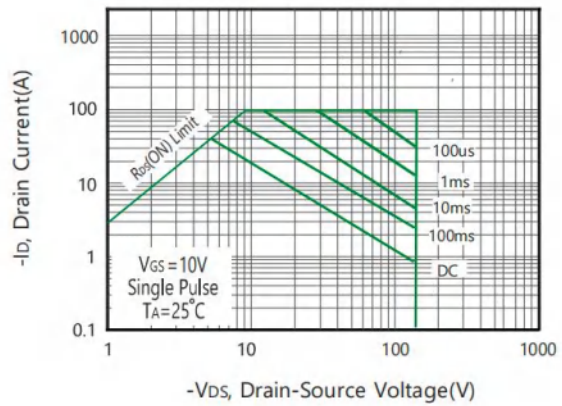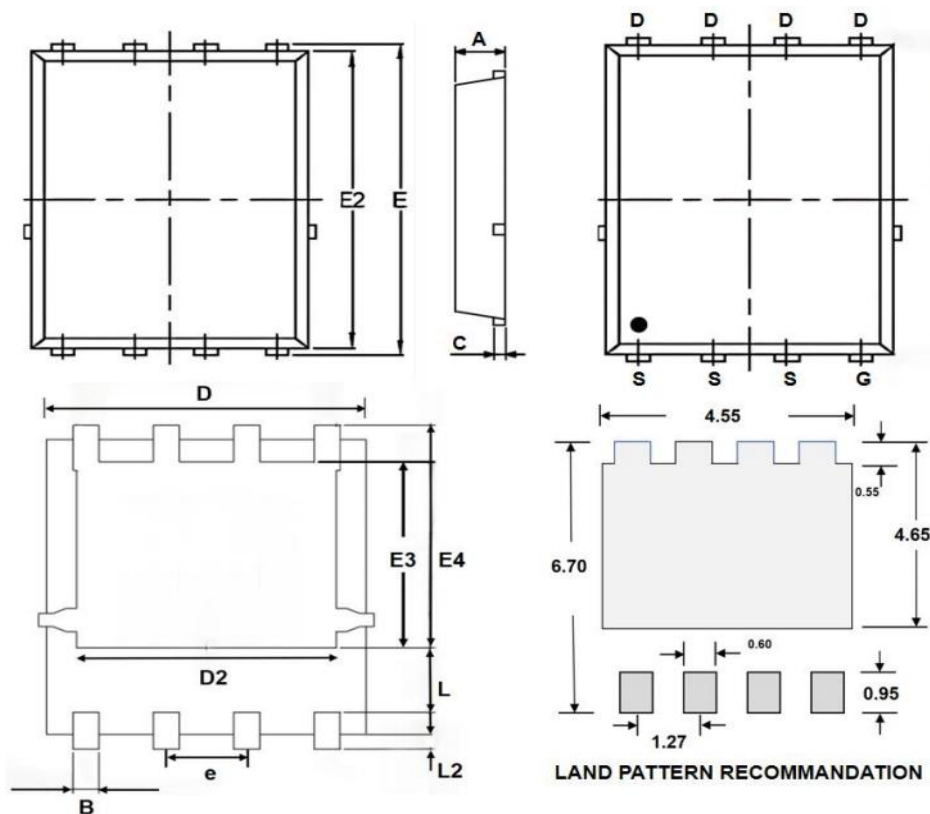

SYMBOLS	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	--	1.20	0.031	--	0.047
B	0.25	--	0.51	0.012	--	0.020
C	0.15	--	0.35	0.006	--	0.014
D	4.80	--	5.45	0.189	--	0.209
D2	3.61	--	4.35	0.142	--	0.171
E	5.90	--	6.35	0.232	--	0.250
E2	5.42	--	6.06	0.213	--	0.232
E3	3.23	--	3.90	0.127	--	0.154
E4	3.69	--	4.55	0.145	--	0.179
L	0.61	--	1.80	0.024	--	0.071
L2	0.05	--	0.36	0.002	--	0.014
e	--	1.27	--	--	0.050	--

HSBA30P15 Marking:

