

General Description

The HSH120N12A uses SGT technology to provide excellent $R_{DS(on)}$, low gate charge and fast switching characteristics. This device is suitable for use as a wide variety of applications.


Product Summary

V_{DS}	120	V
$R_{DS(ON),typ}$	7	m Ω
I_D	120	A

Features

- 100% EAS Guaranteed
- Low $R_{DS(ON)}$
- Low Gate Charge
- RoHs and Halogen-Free Compliant

TO-263 Pin Configuration

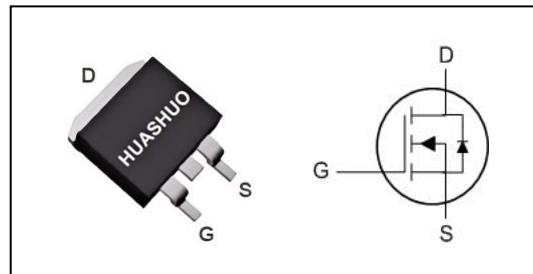

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	120	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D@T_C=25^\circ\text{C}$	Continuous Drain Current ^{1,6}	120	A
$I_D@T_C=100^\circ\text{C}$	Continuous Drain Current ^{1,6}	72	A
I_{DM}	Pulsed Drain Current ²	430	A
EAS	Single Pulse Avalanche Energy ³	508	mJ
I_{AS}	Avalanche Current	44	A
$P_D@T_C=25^\circ\text{C}$	Total Power Dissipation ⁴	200	W
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient ¹	---	50	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	0.9	$^\circ\text{C/W}$



N-Ch 120V Fast Switching MOSFETs

Electrical Characteristics (T_J=25 °C, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250uA	120	---	---	V
R _{DS(ON)}	Static Drain-Source On-Resistance ²	V _{GS} =10V, I _D =20A	---	7	9	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =250uA	2	3	4	V
I _{DSS}	Drain-Source Leakage Current	V _{DS} =120V, V _{GS} =0V, T _J =25°C	---	---	1	uA
		V _{DS} =120V, V _{GS} =0V, T _J =55°C	---	---	5	
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±20V, V _{DS} =0V	---	---	±100	nA
g _{fs}	Forward Transconductance	V _{DS} =5V, I _D =20A	---	43	---	S
R _g	Gate Resistance	V _{DS} =0V, V _{GS} =0V, f=1MHz	---	2	---	Ω
Q _g	Total Gate Charge (10V)	V _{DS} =60V, V _{GS} =10V, I _D =20A	---	53	---	nC
Q _{gs}	Gate-Source Charge		---	12	---	
Q _{gd}	Gate-Drain Charge		---	18	---	
T _{d(on)}	Turn-On Delay Time	V _{DD} =60V, V _{GS} =10V, R _G =6Ω, I _D =20A	---	10	---	ns
T _r	Rise Time		---	45	---	
T _{d(off)}	Turn-Off Delay Time		---	30	---	
T _f	Fall Time		---	11	---	
C _{iss}	Input Capacitance	V _{DS} =60V, V _{GS} =0V, f=1MHz	---	3320	---	pF
C _{oss}	Output Capacitance		---	345	---	
C _{rss}	Reverse Transfer Capacitance		---	18	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _S	Continuous Source Current ^{1,5,6}	V _G =V _D =0V, Force Current	---	---	120	A
V _{SD}	Diode Forward Voltage ²	V _{GS} =0V, I _S =1A, T _J =25°C	---	---	1.2	V
t _{rr}	Reverse Recovery Time	I _F =20A, di/dt=100A/μs,	---	89	---	nS
Q _{rr}	Reverse Recovery Charge	T _J =25°C	---	112	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width ≤ 300us , duty cycle ≤ 2%
- 3.The EAS data shows Max. rating . The test condition is V_{DD}=50V,V_{GS}=10V,L=0.5mH,I_{AS}=44A
- 4.The power dissipation is limited by junction temperature
- 5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.
- 6.The maximum current rating is package limited.



Typical Characteristics

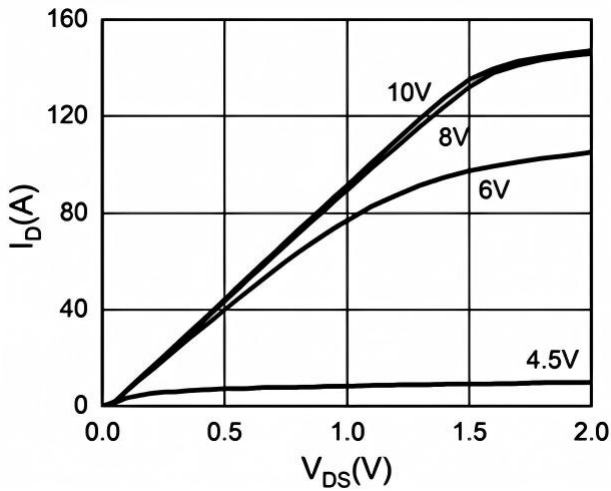


Fig.1 Typical Output Characteristics

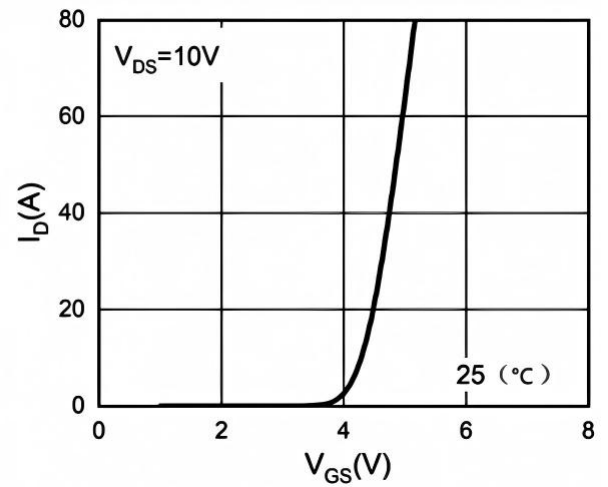


Fig.2 Transfer Characteristics

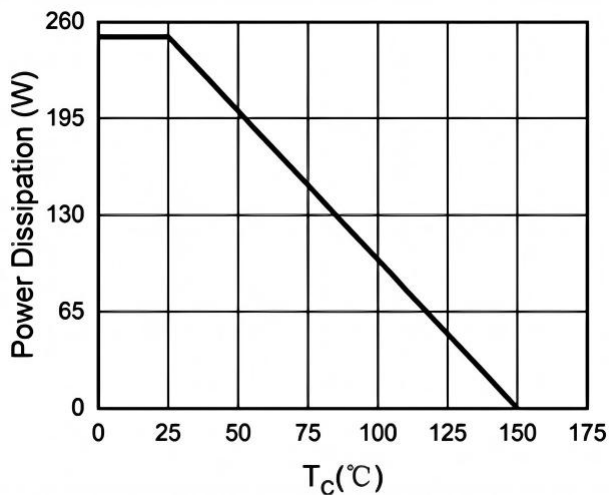


Fig.3 Power Dissipation

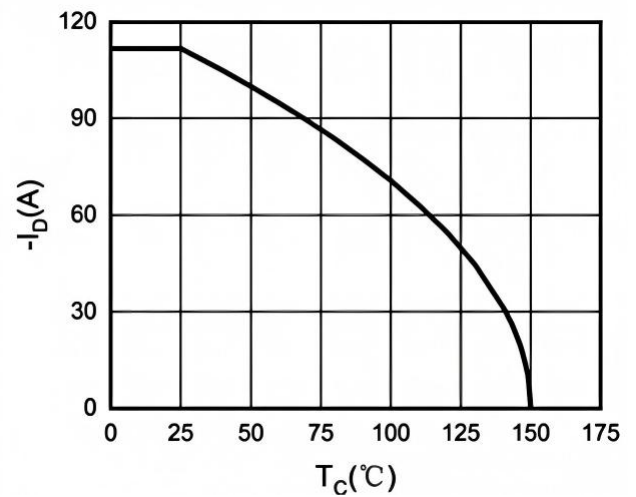


Fig.4 Drain Current

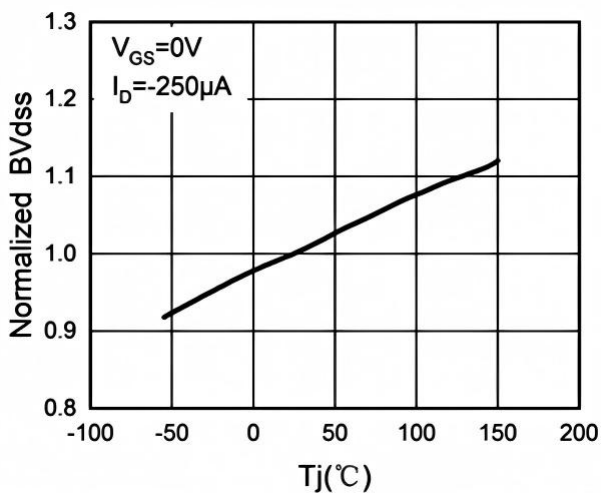


Fig.5 BV_{DS} vs Junction Temperature

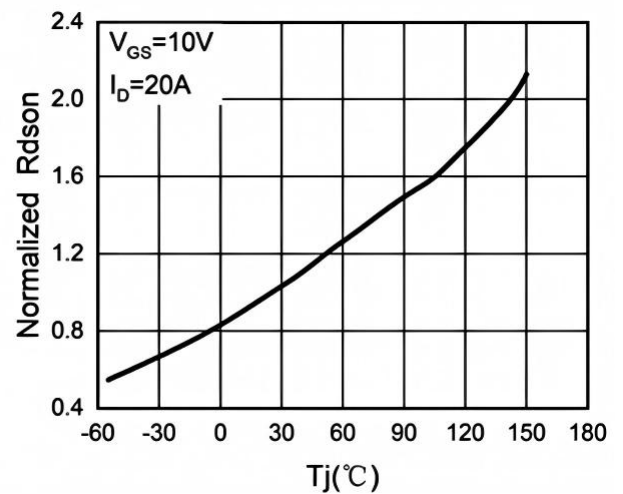


Fig.6 $R_{DS(ON)}$ vs Junction Temperature



N-Ch 120V Fast Switching MOSFETs

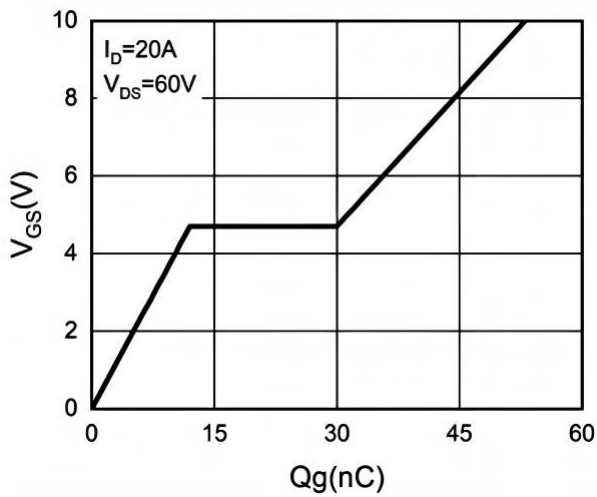


Fig.7 Gate Charge Waveforms

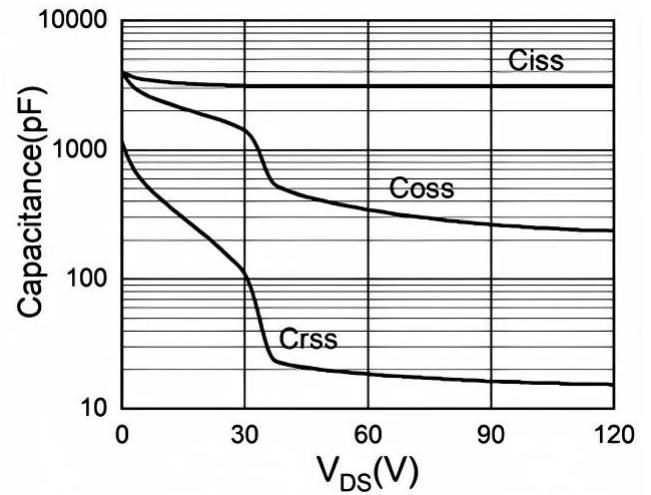


Fig.8 Capacitance

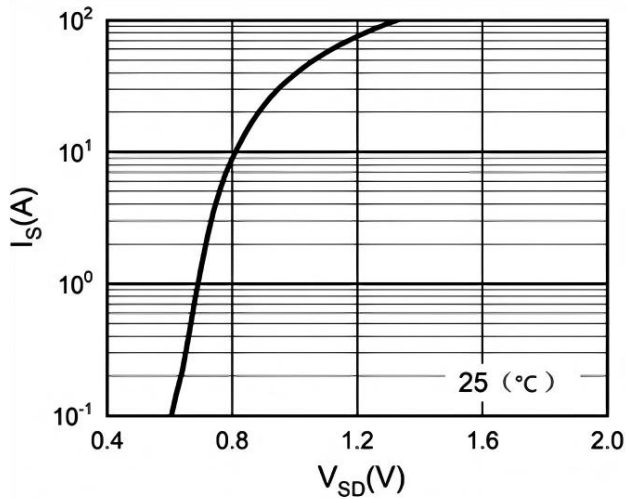


Fig.9 Body Diode Characteristics


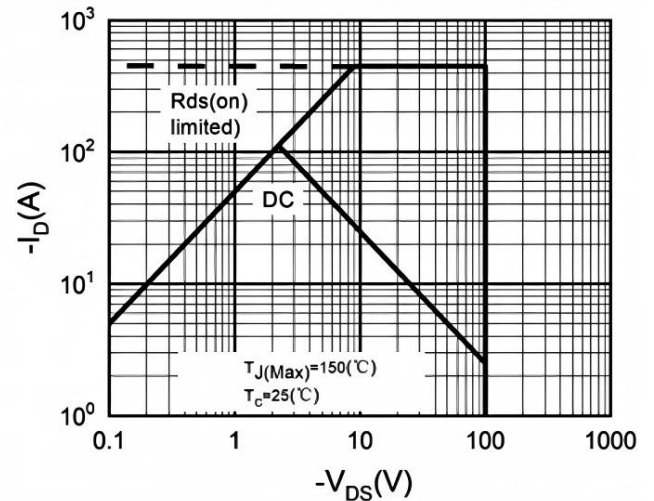


Fig.10 Maximum Safe Operating Area

Ordering Information

Part Number	Package code	Packaging
HSH120N12A	TO-263	800/Tape&Reel

TO-263 Package Outline

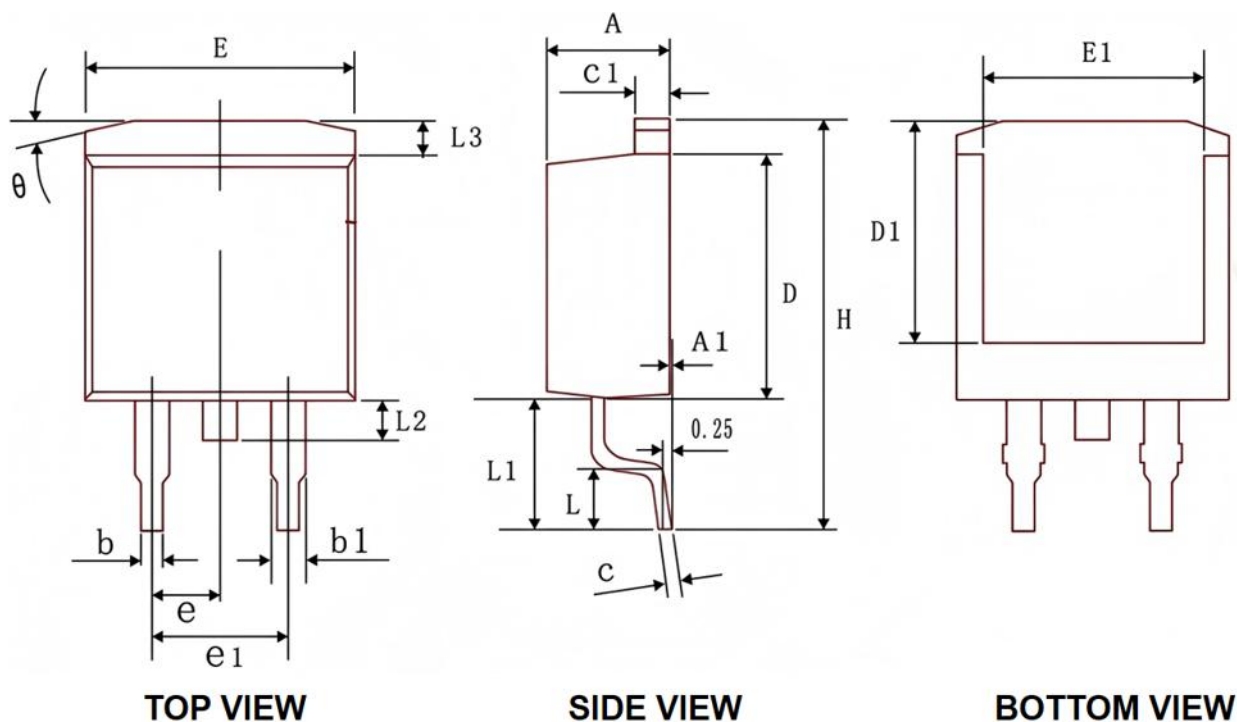

COMMON DIMENSIONS(UNIT OF MEASURE - MM)

SYMBOL	MIN	NOM	MAX
A	4.37	4.57	4.77
A1	0.00	-	0.25
b	0.70	0.83	0.96
b1	1.00	1.24	1.47
C	0.35	0.45	0.55
C1	1.25	1.30	1.35
D	8.50	8.90	9.30
D1	7.50	8.00	8.50
H	14.7	15.20	15.7
E	9.80	10.08	10.4
E1	7.35	7.80	8.25
e1	4.93	5.08	5.23
L	2.00	2.30	2.60
L1	4.50	4.75	5.00
L2	1.30	1.53	1.75
L3	1.10	1.29	1.47
e	2.54 BSC		
θ	13°TYP		

HSH120N12A Marking:

