


## Current Compensated Ring Core Double Chokes LCM4520-LCM1513-Series

Features:


- 1、 LCMrealizes big size and Hight current
- 2、 High Impedance and Excellent Frequency Characteristic.
- 3、 Self Electromagnetic Shielding.
- 4、 Low Magnetic Flux Leakage

Applications:

Used for power line noise suppression for any electronic devices.  
Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs, stand-alone word processors,etc.



### 1.SHAPES AND DIMENSIONS Unit:mm

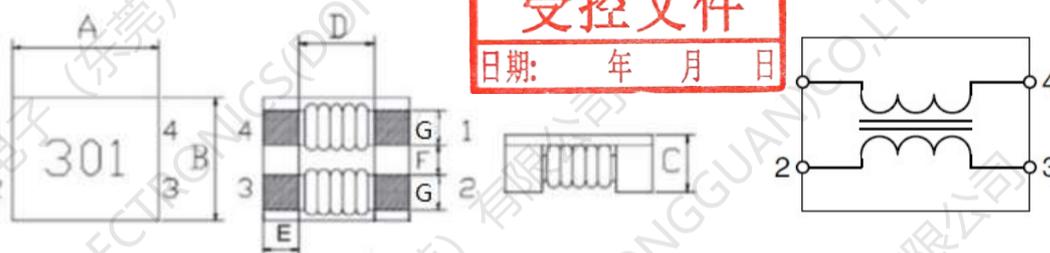


方成电子（东莞）有限公司  
受控文件  
日期： 年 月 日

PartNumber	A	B	C	D Typ	E(ref)	F(ref)	G(ref)
LCM4520	4.7±0.5	4.5±0.5	2.5MAX	2.7	1.0	1.0	0.9
LCM7060	7.0±0.5	6.0±0.5	3.8MAX	3.5	1.5	1.5	1.75
LCM9070	9.5±0.5	7.0±0.5	4.8MAX	5.5	1.75	2.0	1.75
LCM1211	12.5±0.5	10.8±0.5	6.5MAX	7.0	2.7	2.7	2.50
LCM1513	15.5±0.5	13.0±0.5	6.8/MAX	9.0	3.0	3.0	3.3

### 2.MEASURING CIRCUITS




- A chip-type common mode filter for large current applications. Common mode impedance surpasses 300 to 1000 $\Omega$  at 100MHz. Noise is greatly suppressed.
- Capable of handling the highest current (up to 10A) of any chiptype common mode filter.
- Height and size have been considered, resulting in a compact and light-weight choke coil. Applicable for the miniaturization required to reduce the size and weight of portable equipment.
- The products contain no lead and also support lead-freesoldering.
- This product does not contain regulated substances that are slated to be included in RoHS.

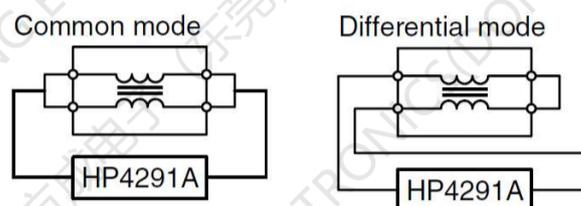


### 3.ELECTRICAL CHARACTERISTICS

PART Number	Z( $\Omega$ ) at 100 MHz		RDC(m $\Omega$ ) max	Rated Current (A)Max	IR (M $\Omega$ )Min	Rated Voltage Vdc(V)
	Min	TYP				
LCM4520-900	60	90	35	3.2	10	80-125
LCM4520-151	90	150	40	3.2	10	
LCM4520-231	180	230	45	3.0	10	
LCM4520-301	200	300	45	3.0	10	
LCM4520-381	250	380	50	2.5	10	
LCM4520-401	300	420	50	2.5	10	
LCM4520-501	350	500	55	2.4	10	
LCM4520-701	500	700	58	2.2	10	
LCM4520-901	650	900	60	2.1	10	
LCM4520-102	800	1000	60	2.1	10	
LCM4520-122	1000	1200	70	2.0	10	
LCM4520-142	1200	1400	80	1.9	10	
LCM4520-202	1800	2000	80	1.5	10	
LCM4520-302	2500	3000	80	1.0	10	

### 4. IMPEDANCE vs. FREQUENCY CHARACTERISTICS

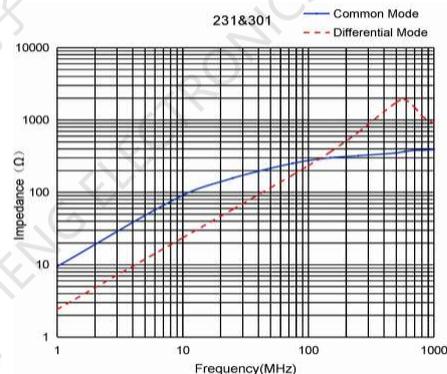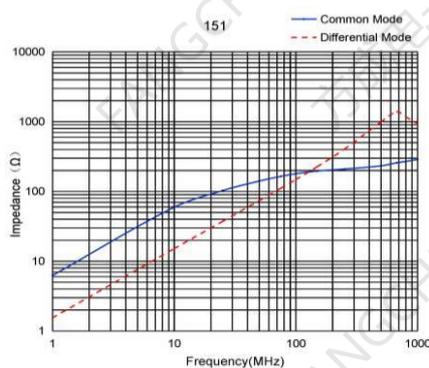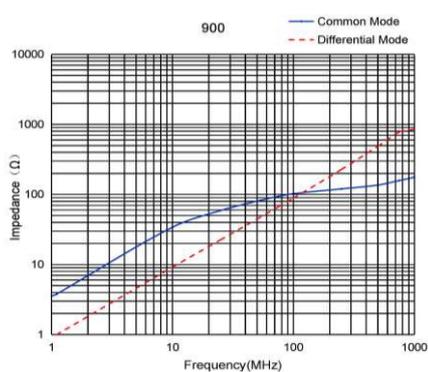

## Current Compensated Ring Core Double Chokes LCM4520-LCM1513-Series

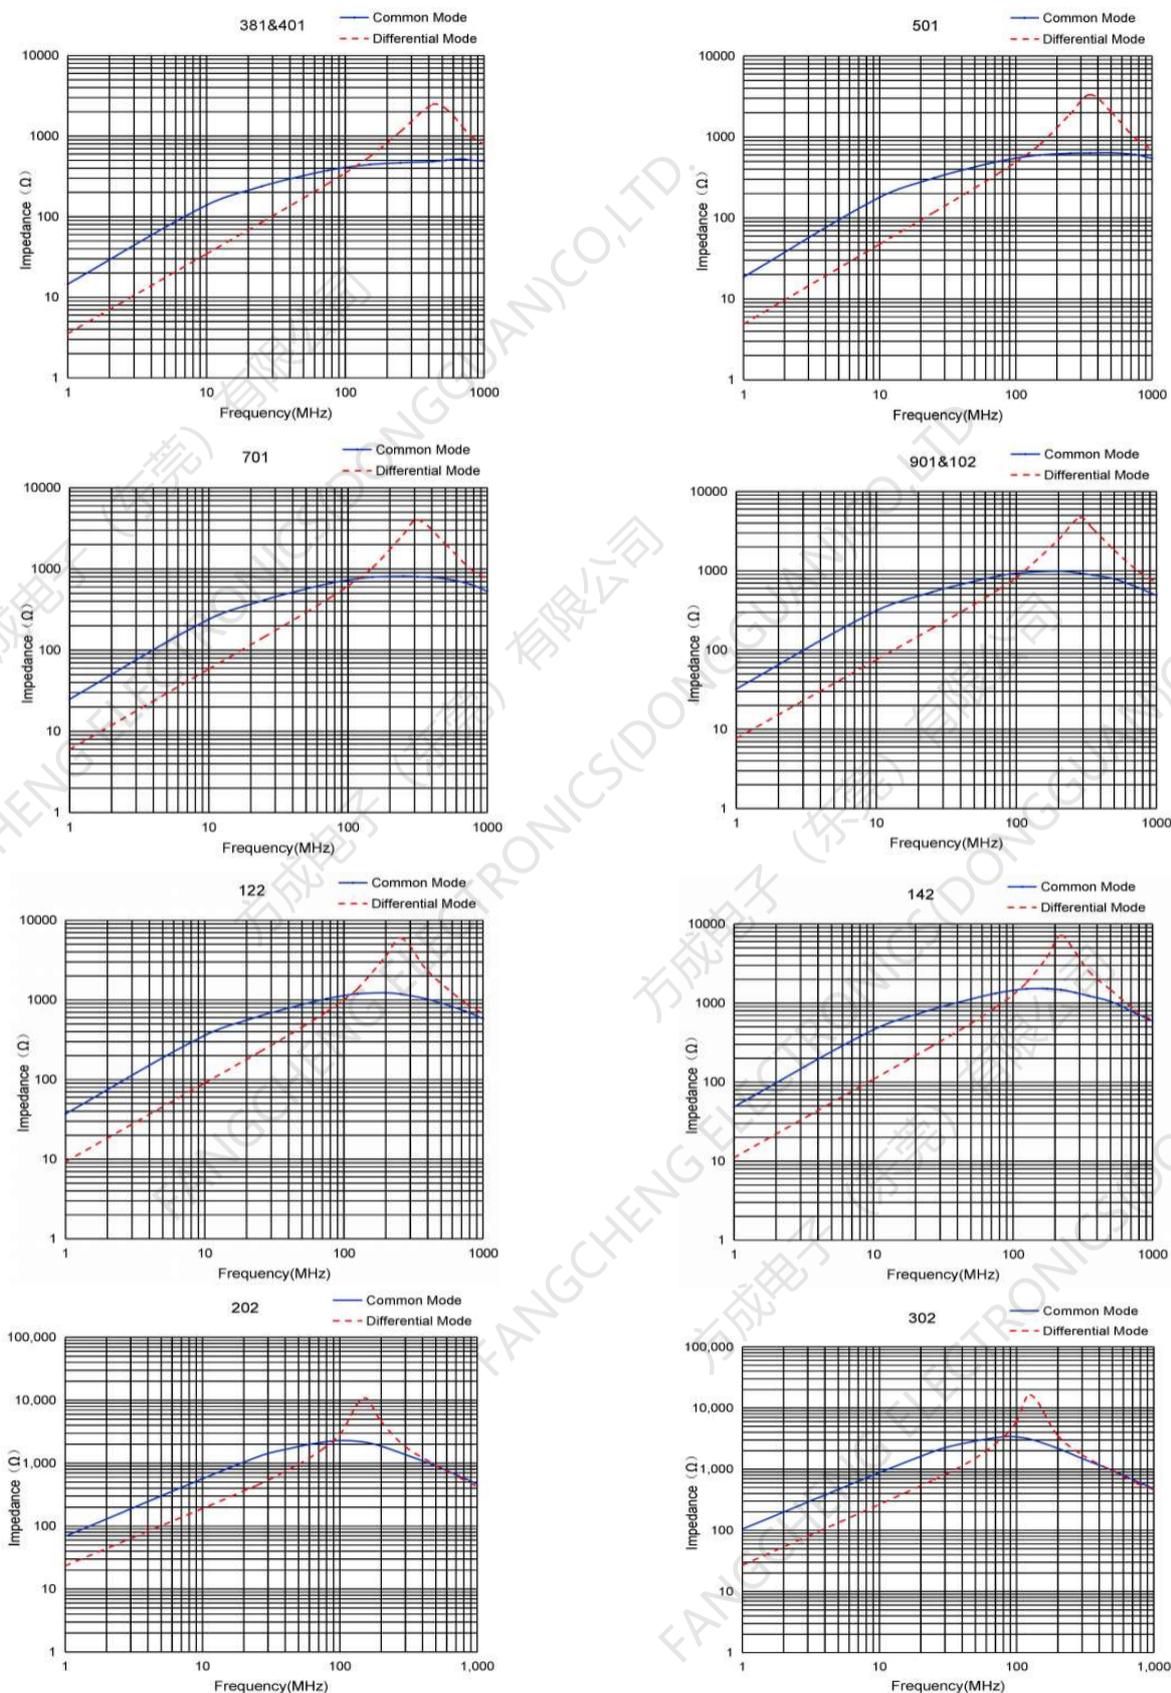


### 5.ELECTRICAL CHARACTERISTICS


PART Number	Z( $\Omega$ ) at 100 MHz		RDC(m $\Omega$ ) max	Rated Curren (A)Max	IR (M $\Omega$ )Min	Rated Voltage Vdc(V)
	Min	TYP				
LCM7060-101	100	140	10	9	10	80-125
LCM7060-301	225	300	10	5	10	
LCM7060-501	275	350	10	5	10	
LCM7060-601	500	700	15	4	10	
LCM7060-701	500	700	15	4	10	
LCM7060-102	800	1020	17	3	10	
LCM7060-132	910	1300	21	2.5	10	
LCM7060-222	1700	2000	60	1.2	10	
LCM7060-272	2000	2700	65	1.0	10	
LCM7060-302	2200	3500	80	0.8	10	

### 6.IMPEDANCE vs. FREQUENCY CHARACTERISTICS

LCM7060-301

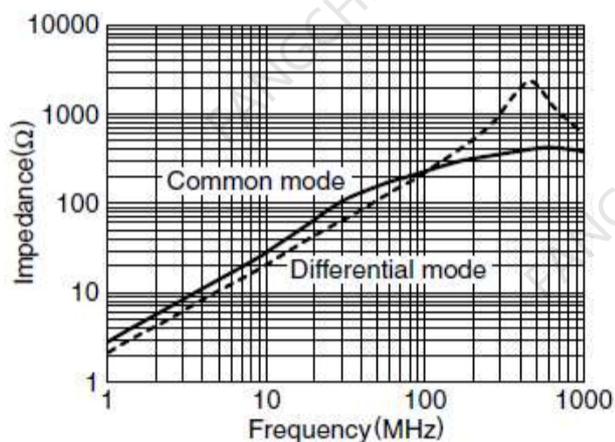


LCM7060-701

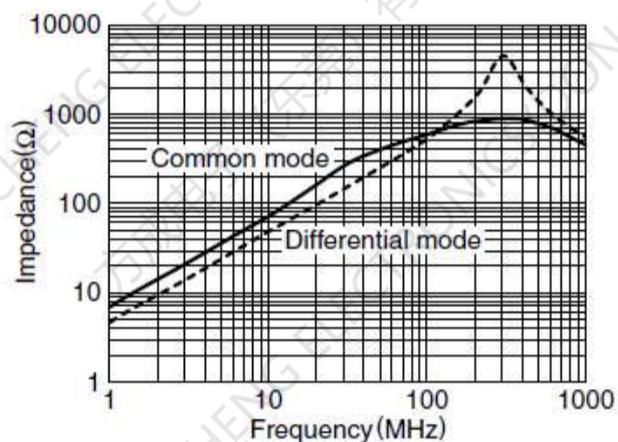



### 7.ELECTRICAL CHARACTERISTICS

PART Number	Z( $\Omega$ ) at 100 MHz		RDC(m $\Omega$ ) Max	Rated Current (A)Max	IR (M $\Omega$ )Min	Rated Voltage Vdc(V)
	Min	TYP				
LCM9070-301	225	300	6.0	10.0	10	80-125
LCM9070-501	450	600	8.0	8.0	10	
LCM9070-701	500	700	10.0	6.0	10	
LCM9070-102	750	1000	13.0	5.0	10	
LCM9070-152	1000	1500	15.0	4.5	10	
LCM9070-202	1500	2000	20.0	4.0	10	
LCM9070-222	1700	2200	28.0	4.0	10	
LCM9070-272	2000	2700	40.0	3.5	10	
LCM9070-302	2400	3200	45.0	3.0	10	

### 8.IMPEDANCE vs. FREQUENCY CHARACTERISTICS

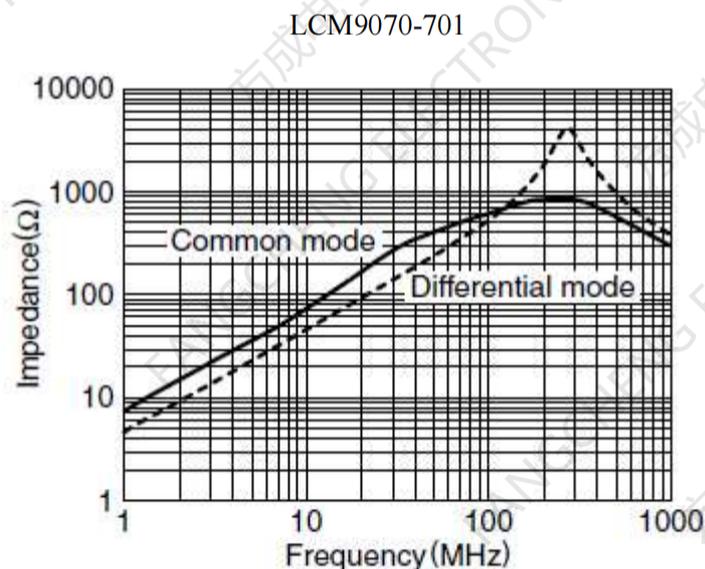

#### MEASURING CIRCUITS



### 9.ELECTRICAL CHARACTERISTICS


PART Number	Z( $\Omega$ ) at 100 MHz		RDC(m $\Omega$ ) Max	Rated Curren (A)Max	IR (M $\Omega$ )Min	Rated Voltage Vdc(V)
	Min	TYP				
LCM1211-800	80	230	2.0	10.0	10	125
LCM1211-701	500	700	6.0	8.0	10	125
LCM1211-801	600	800	8.0	8.0	10	125
LCM1211-102	750	1000	14.0	6.0	10	125
LCM1211-222	2200	2500	35.0	1.8	10	125
LCM1211-272	2300	2700	50.0	1.5	10	125

### 10.ELECTRICAL CHARACTERISTICS


PART Number	Z( $\Omega$ ) at 100 MHz		RDC(m $\Omega$ ) Max	Rated Curren (A)Max	IR (M $\Omega$ )Min	Rated Voltage Vdc(V)
	Min	TYP				
LCM1513-301	250	300	5.0	13	10	125
LCM1513-551	450	550	6.0	10	10	125
LCM1513-701	500	700	7.0	10	10	125
LCM1513-102	800	1000	8.5	10	10	125
LCM1513-152	1100	1500	9.0	8.0	10	125

### 11.IMPEDANCE vs. FREQUENCY CHARACTERISTICS

LCM1211-701

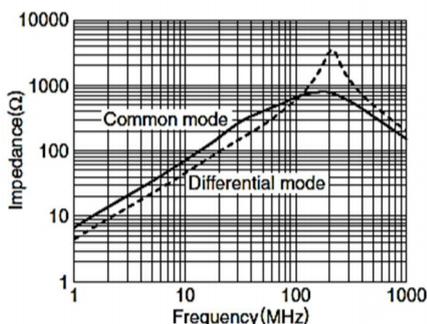

LCM1211-102

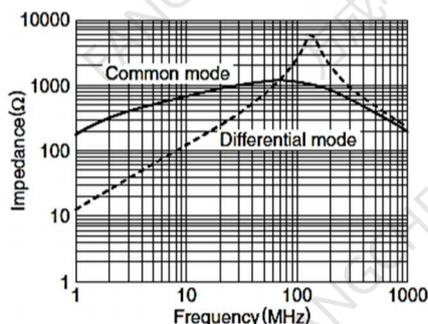

LCM1513-551

