

■ **Features**

- Glass passivated chip
- Low reverse leakage current
- High surge current capability
- Reliable low cost construction utilizing molded plastic technique


Reverse Voltage 50-1000 V
Forward Current 1.5 A max

■ **Applications**

- General purpose use in AC/DC bridge full wave rectification

■ **Mechanical Data**

- Case: DBM
- Polarity symbols being marked on body
- Molding compound meets UL 94V-0 flammability rating
- RoHS-compliant, Solder plated, solderable per MIL-STD-750, Method 2026

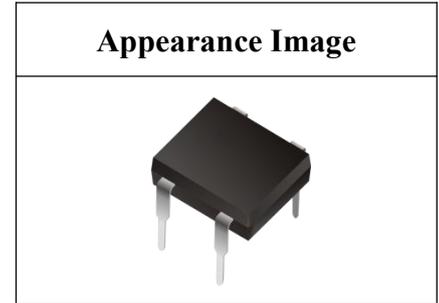

■ **Marking**

- DB15x(1~7)

■ **Maximum Ratings @ Ta = 25°C unless otherwise noted**

PARAMETER	SYMBOL	UNIT	DB151	DB152	DB153	DB154	DB155	DB156	DB157		
Repetitive peak reverse voltage	V _{RRM}	V	50	100	200	400	600	800	1000		
Maximum RMS voltage	V _{RMS}	V	35	70	140	280	420	560	700		
Maximum DC blocking Voltage	V _{DC}	V	50	100	200	400	600	800	1000		
Maximum average output current@60Hz sine wave, resistance load	I _{F(AV)}	A	1.5								
Peak forward surge current 8.3 ms single half sine wave superimposed on rated load	I _{FSM}	A	55								
Peak forward surge current 1.0 ms single half sine wave superimposed on rated load		A	110								
Current squared time @1ms≤t<8.3ms Tj=25°C, Rating of per diode	I ² t	A ² S	12.55								
Storage temperature	T _{stg}	°C	-55~+150								
Junction temperature	T _j	°C	-55~+150								

■ **Electrical Characteristics @ Ta = 25°C unless otherwise noted**

PARAMETER	TEST CONDITIONS	SYMBOL	UNIT	DB151	DB152	DB153	DB154	DB155	DB156	DB157
Maximum instantaneous forward voltage	I _F =0.75A	V _F	V	1.0						
Maximum DC reverse current at rated DC blocking voltage	V _R =V _{DC} , T _j =25°C	I _R	μA	5						
	V _R =V _{DC} , T _j =100°C	I _R		100						

■ **Characteristic Curve (Typical)**

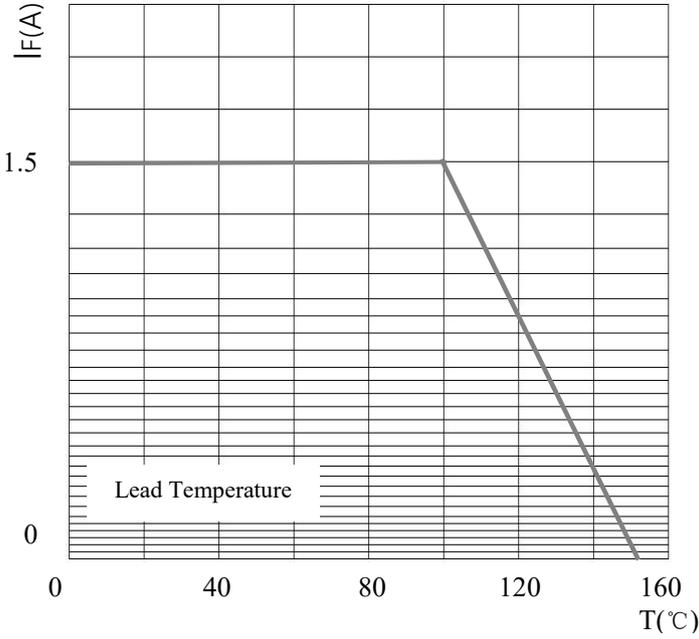


FIG1. Derating Curve For Output Rectified Current

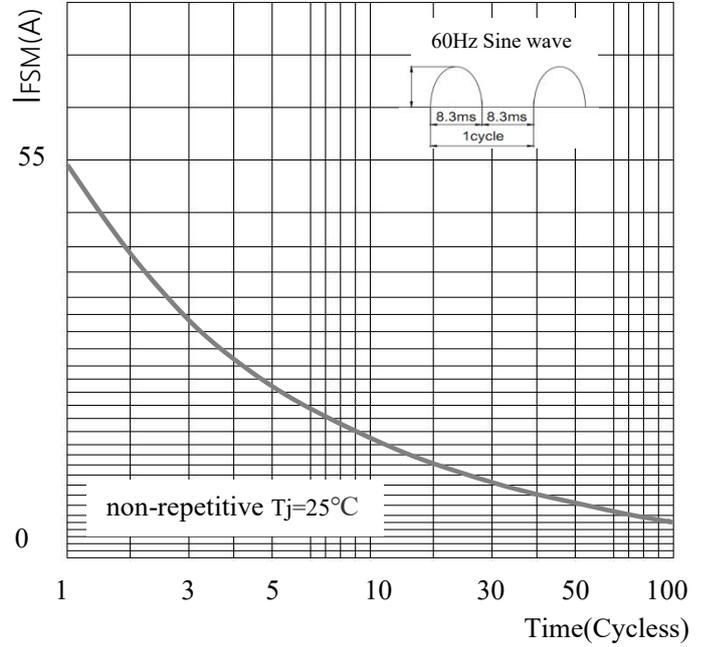


FIG2. Surge Forward Current Capability

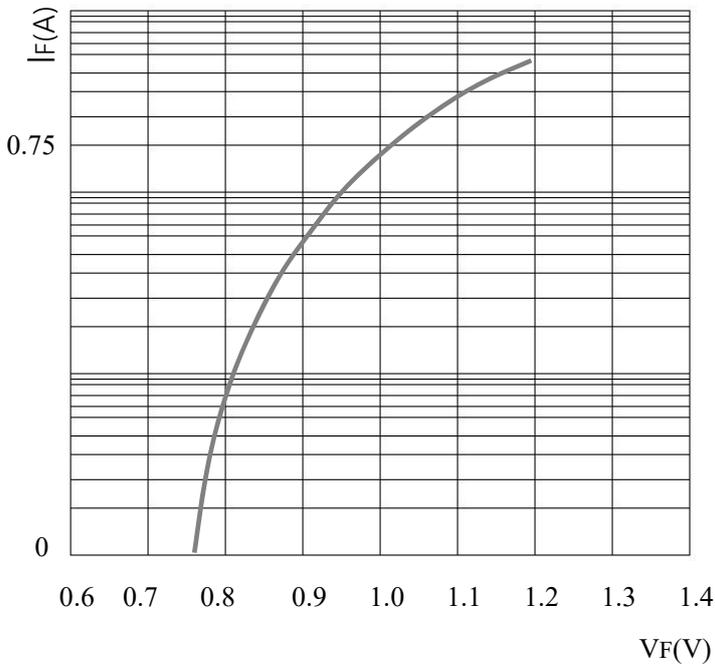


FIG3. Typical Forward Characteristics


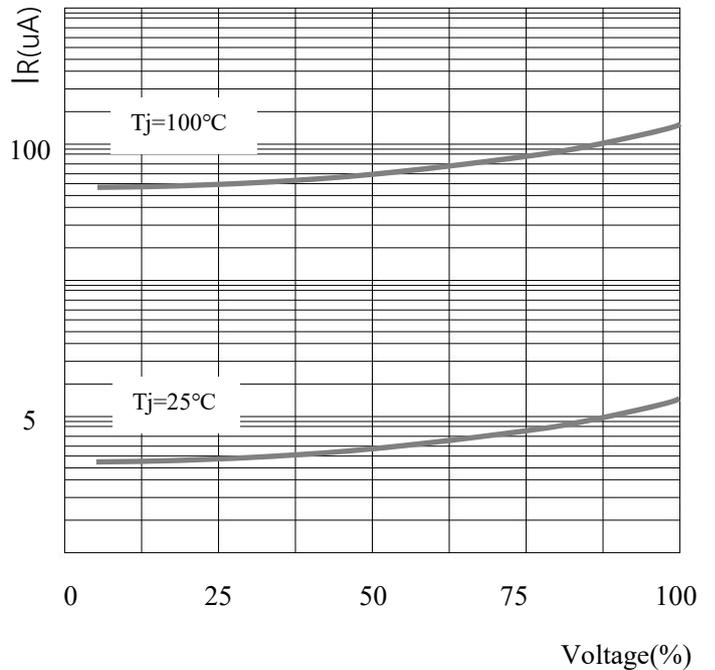


FIG4. Typical Reverse Characteristics

■ **Marking and packet information**

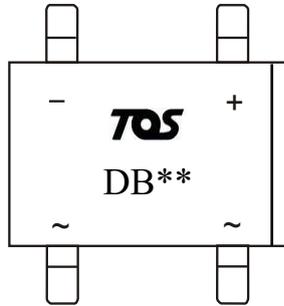

DIP Vertical View

DB**: Product Type Code **TOS** : Brand Logo

Packaging information	
Tube	50PCS
Box	2500PCS
Carton	10000PCS

■ **DBM Package outline dimensions**

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	6.20	6.50	0.244	0.256
B	7.95	8.35	0.313	0.329
C	5.00	5.20	0.197	0.205
D	0.95	1.15	0.037	0.045
E	1.39	1.9	0.055	0.074
e	0.46	0.58	0.018	0.023
F	2.80	3.3	0.110	0.130
G	1.27	2.03	0.050	0.800
H	7.24	8.00	0.285	0.315
I	7.6	8.9	0.300	0.350
J	0.18	0.33	0.007	0.013
K	3.81	4.69	0.15	0.185

■ **Notice**

XILONG reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. xilong does not assume any liability arising out of the application or use of any product described herein.