SAMZO | REAC/ROHS

| REV | ECN NO | DESRIPTION | DESIGN | APPROVAL | DATE |
|---|---|---|---|---|---|
| A1 | NEW | Replace frame | | | 2018.06.12 |

技术要求：

Technical requirements:

1. 打铜底0.5-1UM,镍底1-3UM,哑锡3-5UM。
   Copper base 0.5 - 1 UM, nickel base 1-3UM, matte tin 3 - 5 UM.
2. 不得有脚变形，毛刺等缺陷。
   There shall be no defects such as pin deformation and burrs.
3. 插脚尖部符合可焊性要求。
   The tip of the insertion pin shall meet the solderability requirements.
4. 螺纹需符合通止规要求。
   The thread shall meet the requirements of the go and no-go gauge.
5. 材质：黄铜H62.
   Material: Brass H62.
6. 过载电流：60A
   Overload current: 60A
7. 螺孔为 M3
   The screw holes M3
8. 未标注尺寸公差值按GB/T1184-1996H级
   Unmarked dimensional tolerance values are in accordance with Grade H of GB/T1184-1996
9. 螺丝扭力：1.0Nm
   Screw torque: 1.0Nm

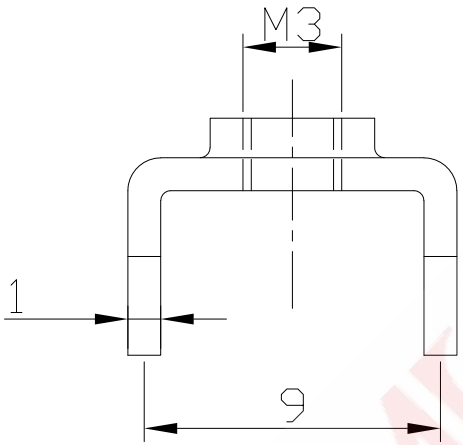


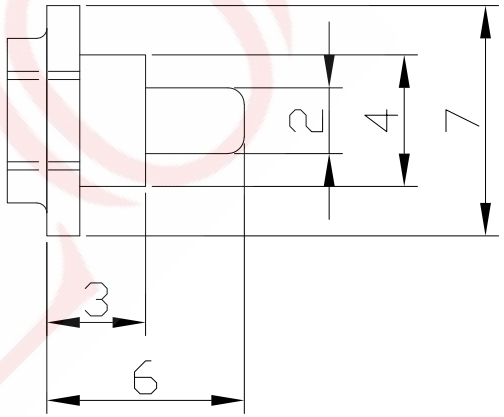


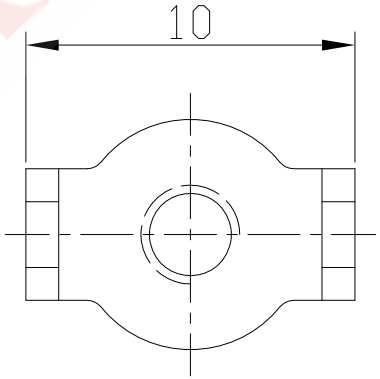


710 30 30 1 L3

- L3 — Pressing hole specification: M3
- 1 — Mold number: L043-H
- 30 — Pin height: 3.0mm
- 30 — Height above the board: 3.0mm
- 710 — Specification size:7*10mm

| ITEM | DESCRIPTION | MATERIAL | QTY | FINSH/COLOR |
|---|---|---|---|---|
| A | Subject | H62(Y2) | 1 | tin plating |

| | | | |
|---|---|---|---|
| DESIGN | WANGGUIFA | 2018.06.12 |
| CHECKED | ZHENGUILAN | 2018.06.12 |
| APPROVED | LILIANJIANG | 2018.06.14 |

| GENERAL TOLERANCE | |
|---|---|
| ⩾0~2< | ±0.15 |
| ⩾2~5< | ±0.25 |
| ⩾0~2< | ±0.15 |
| ⩾5 | ±0.35 |

FIRST VIEW



SCALE 1:1 UNIT mm

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

SAMZO COMPONENTS
Electronic switch and connector manufacturer

TITLE:: 7*10-H3.0+3.0mm （M3)
DWG NO: 710-P0385
PART NO: 710-2024103
MODEL NO: 71030301L3
NAME: PCB soldering terminal