

SOD-523 Plastic-Encapsulate Diodes


1N4148WT FAST SWITCHING DIODE

SOD-523



FEATURES

- Small Package
- Low Reverse Current
- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion



MARKING:T4



Polarity symbols marked on case







MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V _{RM}	100	V
Reverse Voltage	V _R	75	V
Peak Repetitive Reverse Voltage	V _{RRM}		
Working Peak Reverse Voltage	V _{RWM}		
RMS Reverse Voltage	V _{R(RMS)}	53	V
Average Rectified Output Current	I _O	150	mA
Forward Continuous Current	I _{FM}	300	mA
Bcb!fYdYh]j Y'DYU_': cfk UfX'Gi f[Y'7i ffYbl4 hl , "" a g'	I _{FSM}	2	A
Power Dissipation	P _D	150	mW
Thermal Resistance from Junction to Ambient Junction	R _{ΘJA}	833	°C/W
Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55~+150	°C

ELECTRICAL CHARACTERISTICS(T_a=25°C unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse voltage	V _(BR)	I _R =1μA	75			V
Reverse current	I _R	V _R =75V			1	μA
		V _R =20V			25	nA
Forward voltage	V _F	I _F =1mA			0.715	V
		I _F =10mA			0.855	V
		I _F =50mA			1	V
		I _F =150mA			1.25	V
Total capacitance	C _{tot}	V _R =0V,f=1MHz			2	pF
Reverse recovery time	t _{rr}	I _F = I _R =10mA, I _{rr} =0.1*I _R ,R _L =100Ω			4	ns

Typical Characteristics

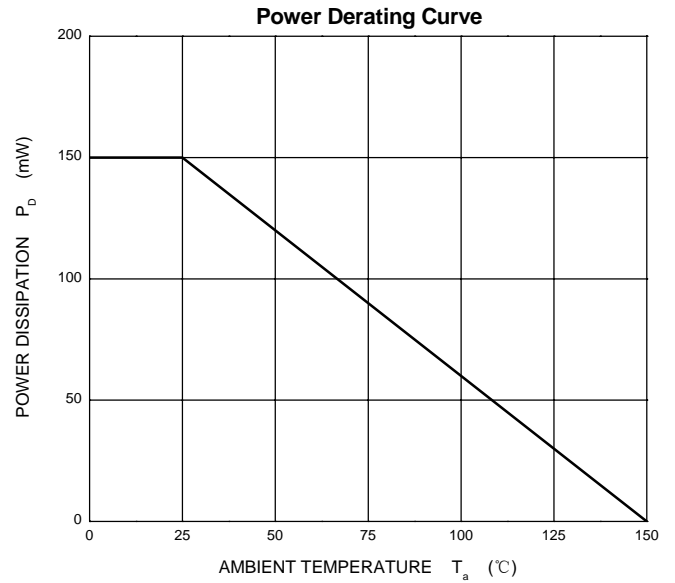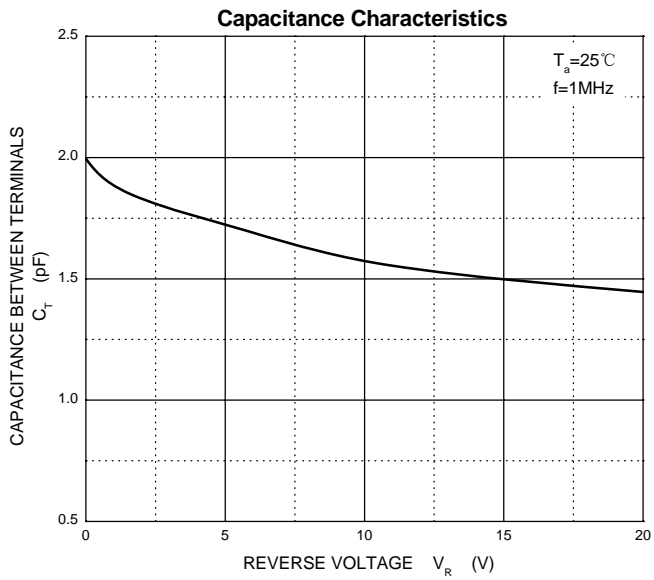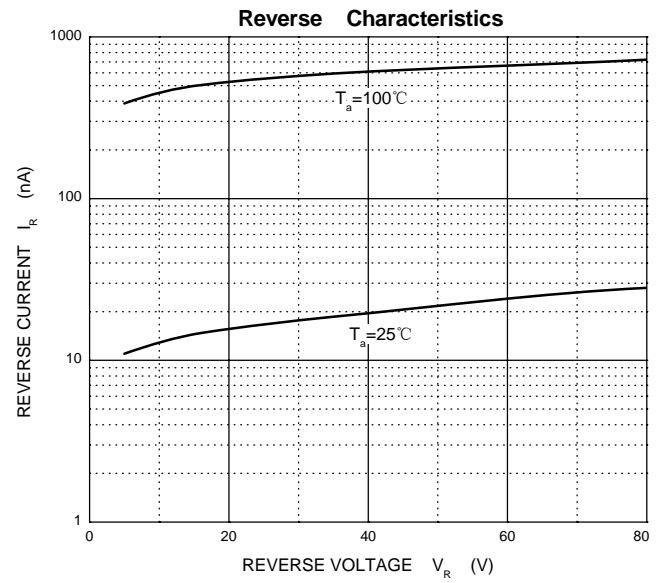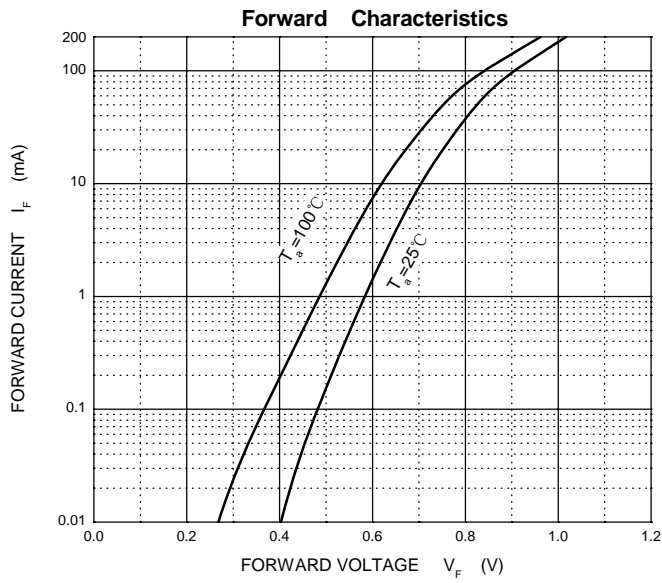


Outline Drawing

SOD-523 Package Outline Dimensions

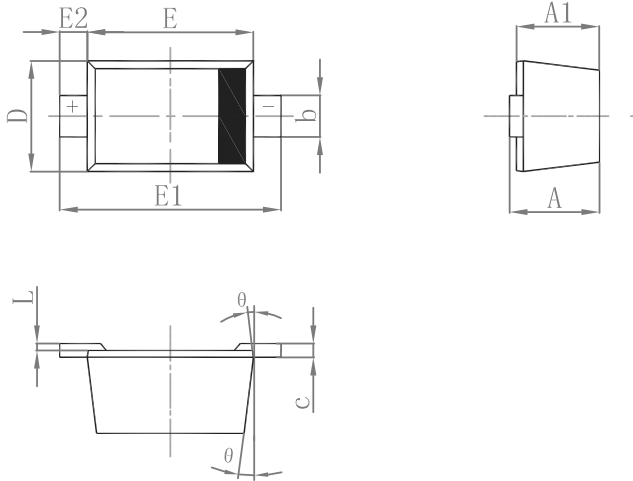

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	0.510	0.770	0.020	0.031
A1	0.500	0.770	0.020	0.031
b	0.250	0.400	0.010	0.016
c	0.080	0.150	0.003	0.006
D	0.750	1.000	0.030	0.040
E	1.100	1.300	0.043	0.051
E1	1.500	1.700	0.059	0.067
E2	0.150	0.250	0.006	0.010
L	0.000	0.070	0.000	0.003
K	0°	8°	0°	8°

Suggested Pad Layout

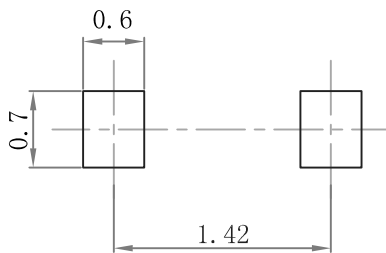

Note:

1. Controlling dimension: in/millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

PACKAGE SPECIFICATIONS

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (pcs)	Box Size (mm)	QTY/Box (pcs)	Carton Size (mm)	Q'TY/Carton (pcs)
SOD-523	7'	178	3000	190*190*190	45,000	400*400*220	180,000

Important Notice and Disclaimer

Microdiode Semiconductor (Shenzhen) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Microdiode Semiconductor (Shenzhen) makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Microdiode Semiconductor (Shenzhen) assume any liability for application assistance or customer product design. Microdiode Semiconductor (Shenzhen) does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Microdiode Semiconductor (Shenzhen). Microdiode Semiconductor (Shenzhen) products are not authorized for use as critical components in life support devices or systems without express written approval of Microdiode Semiconductor (Shenzhen).