

FEATURES 特征


- Magnetic-resin shielded Construction reduces buzz noise to ultra-low levels.  
磁性胶水涂敷结构极大减少了蜂鸣声
- Metallization on ferrite core results in excellent shock resistance and damage-free durability.  
在磁芯上金属化电极, 抗跌落冲击强, 经久耐用
- Closed magnetic circuit design reduces leakage flux and Electro Magnetic Interference (EMI).  
闭合磁路结构设计, 漏磁少, 抗EMI能力强
- 30% higher current rating than conventional inductors of equal size.  
电流特性较同等尺寸传统电感高出30%以上
- Takes up less PCB real estate and save more power.  
省空间, 更省电
- Operating Temp : -45°C~+125°C(Including self heating).  
工作温度范围:-45°C~+125°C(包括自身温度上升)



APPLICATIONS 用途

- Smart phone, smart TV, set top box, notebook, VR,AR, LED lighting.  
智能手机、智能电视、机顶盒、笔记本电脑、虚拟现实、增强现实、LED照明
- Car navigation systems, telecomm base stations.  
车载导航影音、通讯设备

PART NUMBERING 产品型号



① Series Name	
ANR	Wire Wound SMD Power Inductors


③ Feature Type	
T	Standard

④ Nominal Inductance	
Code (example)	Nominal Inductance [ $\mu$ H]
R47	0.47
1R0	1
100	10

⑤ Inductance Tolerance	
K	$\pm 10\%$
M	$\pm 20\%$
N	$\pm 30\%$

② External Dimensions[LxWxH mm]	
252010	2.5x2.0x1.0
252012	2.5x2.0x1.2
3010	3.0x3.0x1.0
3012	3.0x3.0x1.2
3015	3.0x3.0x1.5
4010	4.0x4.0x1.0
4012	4.0x4.0x1.2
4018	4.0x4.0x1.8
4020	4.0x4.0x2.0
4026	4.0x4.0x2.6
4030	4.0x4.0x3.0
5012	5.0x5.0x1.2
5020	5.0x5.0x2.0
5040	5.0x5.0x4.0
5045	5.0x5.0x4.5
6020	6.0x6.0x2.0
6028	6.0x6.0x2.8
6045	6.0x6.0x4.5
8040	8.0x8.0x4.0
8065	8.0x8.0x6.5

### DIMENSIONS & RECOMMENDED LAND PATTERN 尺寸及推荐焊盘

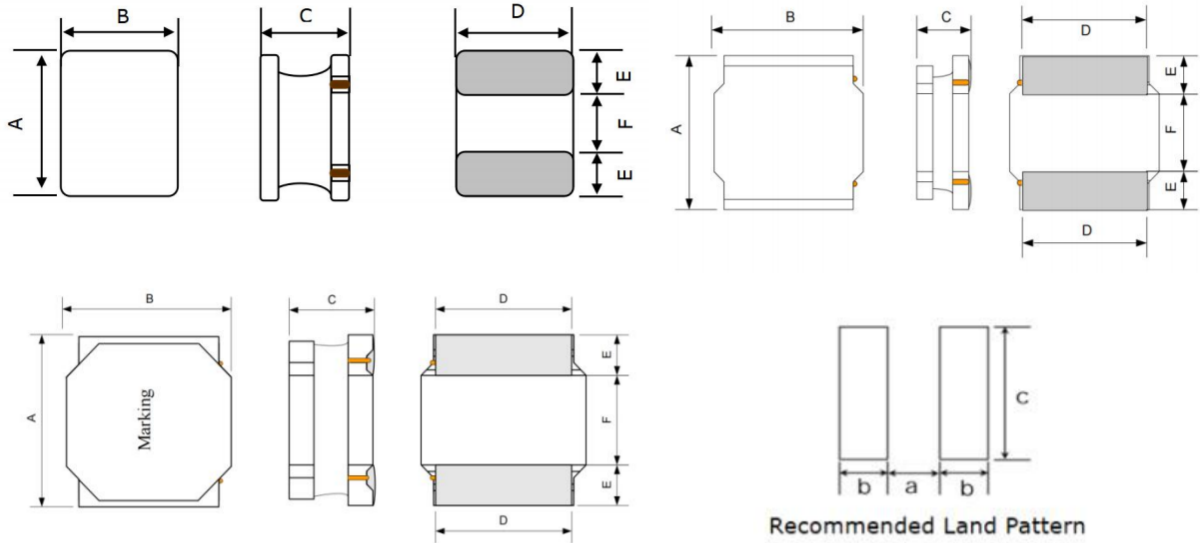

Unit: mm

Series	A	B	C	D Typ.	E Typ.	F Typ.	a Typ.	b Typ.	c Typ.
ANR252010	2.5±0.2	2.0±0.2	1.0 Max.	2.0	0.75	1.0	0.8	0.85	2.2
ANR252012	2.5±0.2	2.0±0.2	1.2 Max.	2.0	0.75	1.0	0.8	0.85	2.2
ANR3010	3.0±0.2	3.0±0.2	1.0±0.2	2.5	0.75	1.5	1.5	0.8	2.7
ANR3012	3.0±0.2	3.0±0.2	1.2 Max.	2.5	0.75	1.5	1.5	0.8	2.7
ANR3015	3.0±0.2	3.0±0.2	1.5 Max.	2.5	0.75	1.5	1.5	0.8	2.7
ANR4010	4.0±0.2	4.0±0.2	1.0±0.2	3.3	1.1	1.8	1.9	1.1	3.7
ANR4012	4.0±0.2	4.0±0.2	1.2 Max.	3.3	1.1	1.8	1.9	1.1	3.7
ANR4018	4.0±0.2	4.0±0.2	1.8 Max.	3.3	1.1	1.8	1.9	1.1	3.7
ANR4020	4.0±0.2	4.0±0.2	2.0 Max.	3.3	1.1	1.8	1.9	1.1	3.7
ANR4026	4.0±0.2	4.0±0.2	2.6 Max.	3.3	1.1	1.8	1.9	1.1	3.7
ANR4030	4.0±0.2	4.0±0.2	3.0 Max.	3.3	1.1	1.8	1.9	1.1	3.7
ANR5012	5.0±0.2	5.0±0.2	1.2 Max.	4.0	1.4	2.2	2.3	1.4	4.2
ANR5020	5.0±0.2	5.0±0.2	2.0 Max.	4.0	1.4	2.2	2.3	1.4	4.2
ANR5040	5.0±0.2	5.0±0.2	4.0 Max.	4.0	1.4	2.2	2.3	1.4	4.2
ANR5045	5.0±0.2	5.0±0.2	4.5 Max.	4.0	1.4	2.2	2.3	1.4	4.2
ANR6020	6.0±0.3	6.0±0.3	2.0 Max.	4.9	1.7	2.6	2.8	1.7	5.7
ANR6028	6.0±0.3	6.0±0.3	2.8 Max.	4.9	1.7	2.6	2.8	1.7	5.7
ANR6045	6.0±0.3	6.0±0.3	4.5 Max.	4.9	1.7	2.6	2.8	1.7	5.7
ANR8040	8.0±0.3	8.0±0.3	4.2 Max.	6.3	2.0	4.0	3.8	2.2	7.5
ANR8065	8.0±0.3	8.0±0.3	6.5 Max.	6.3	2.0	4.0	3.8	2.2	7.5

- All products are printed with Marking except the 252010 & 252012 series.

**ELECTRICAL CHARACTERISTICS 特性规格表**
**● ANR252010 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR252010TR47□	0.47	N / M	0.055	2.39	2.56	2.54	3.35
ANR252010TR56□	0.56	N / M	0.071	2.03	2.18	2.94	3.20
ANR252010TR68□	0.68	N / M	0.073	2.03	2.18	2.23	2.75
ANR252010T1R0□	1	N / M	0.107	1.67	1.80	1.88	2.20
ANR252010T1R5□	1.5	N / M	0.18	1.32	1.42	1.83	2.10
ANR252010T2R2□	2.2	N / M	0.207	1.22	1.31	1.22	1.60
ANR252010T3R3M	3.3	M	0.325	0.91	0.98	1.07	1.30
ANR252010T4R7M	4.7	M	0.557	0.71	0.76	0.96	1.15
ANR252010T5R6M	5.6	M	0.557	0.74	0.80	0.81	0.95
ANR252010T6R8M	6.8	M	0.887	0.60	0.64	0.79	0.92
ANR252010T100M	10	M	1.081	0.51	0.55	0.66	0.78
ANR252010T220M	22	M	1.625	0.45	0.50	0.40	0.48

**● ANR252012 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR252012TR47□	0.47	N / M	0.06	2.18	2.34	3.88	4.27
ANR252012TR68□	0.68	N / M	0.073	1.98	2.13	3.33	3.68
ANR252012T1R0□	1	N / M	0.089	1.96	2.10	2.63	2.90
ANR252012T1R2□	1.2	N / M	0.128	1.48	1.59	2.42	2.67
ANR252012T1R5□	1.5	N / M	0.146	1.42	1.53	2.27	2.51
ANR252012T2R2□	2.2	N / M	0.214	1.17	1.25	1.88	2.07
ANR252012T2R7M	2.7	M	0.237	1.11	1.19	1.75	1.92
ANR252012T3R3M	3.3	M	0.261	1.06	1.13	1.63	1.80
ANR252012T3R6M	3.6	M	0.345	0.91	0.98	1.48	1.64
ANR252012T4R3M	4.3	M	0.373	0.88	0.95	1.39	1.53
ANR252012T4R7M	4.7	M	0.373	0.85	0.92	1.14	1.25
ANR252012T5R1M	5.1	M	0.495	0.76	0.82	1.25	1.37
ANR252012T5R6M	5.6	M	0.533	0.74	0.80	1.13	1.25
ANR252012T6R2M	6.2	M	0.537	0.74	0.80	1.05	1.16
ANR252012T6R8M	6.8	M	0.575	0.70	0.75	0.99	1.09
ANR252012T7R5M	7.5	M	0.605	0.69	0.74	0.98	1.09
ANR252012T8R2M	8.2	M	0.651	0.66	0.71	0.99	1.10
ANR252012T9R1M	9.1	M	0.683	0.63	0.68	0.92	1.02
ANR252012T100M	10	M	0.683	0.63	0.68	0.80	0.88
ANR252012T120M	12	M	1.064	0.52	0.56	0.79	0.88
ANR252012T150M	15	M	1.575	0.43	0.46	0.69	0.77

**ELECTRICAL CHARACTERISTICS 特性规格表**
**● ANR252012 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR252012T220M	22	M	1.956	0.39	0.41	0.54	0.59

**● ANR3010 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR3010T1R0□	1	N / M	0.084	1.47	1.80	1.42	2.10
ANR3010T1R2□	1.2	N / M	0.084	1.47	1.80	1.27	1.70
ANR3010T1R5□	1.5	N / M	0.103	1.32	1.60	1.29	1.70
ANR3010T2R2□	2.2	N / M	0.142	1.11	1.40	1.17	1.50
ANR3010T2R7□	2.7	N / M	0.167	1.04	1.40	1.02	1.20
ANR3010T3R3□	3.3	N / M	0.187	0.97	1.20	0.98	1.20
ANR3010T3R6M	3.6	M	0.213	0.91	1.10	0.96	1.20
ANR3010T4R7M	4.7	M	0.29	0.78	1.10	0.76	1.05
ANR3010T5R6M	5.6	M	0.319	0.71	1.05	0.59	0.65
ANR3010T6R8M	6.8	M	0.393	0.67	0.96	0.56	0.72
ANR3010T8R2M	8.2	M	0.515	0.59	0.70	0.56	0.70
ANR3010T100M	10	M	0.515	0.59	0.70	0.56	0.75
ANR3010T120M	12	M	0.65	0.53	0.67	0.44	0.65
ANR3010T150M	15	M	0.785	0.48	0.57	0.43	0.57
ANR3010T220M	22	M	1.197	0.39	0.52	0.36	0.48
ANR3010T270M	27	M	1.39	0.36	0.50	0.30	0.45
ANR3010T330M	33	M	1.995	0.30	0.55	0.29	0.42
ANR3010T390M	39	M	2.252	0.28	0.53	0.28	0.38
ANR3010T430M	43	M	2.317	0.27	0.52	0.23	0.36
ANR3010T470M	47	M	2.51	0.26	0.52	0.22	0.35
ANR3010T510M	51	M	2.831	0.25	0.48	0.21	0.33
ANR3010T560M	56	M	2.986	0.24	0.35	0.21	0.28

**ELECTRICAL CHARACTERISTICS 特性规格表**
**● ANR3012 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20%	Ω	A		A	
Symbol	L	N=±30%	DCR	Irms		Isat	
ANR3012TR22□	0.22	N / M	0.022	3.05	3.30	5.38	6.00
ANR3012TR82□	0.82	N / M	0.039	2.51	3.00	2.08	2.80
ANR3012T1R0□	1	N / M	0.052	2.23	2.70	1.90	2.80
ANR3012T1R2□	1.2	N / M	0.058	2.04	2.20	2.25	2.50
ANR3012T1R5□	1.5	N / M	0.078	2.04	2.20	1.64	1.90
ANR3012T1R8□	1.8	N / M	0.081	1.67	1.80	1.32	1.90
ANR3012T2R2□	2.2	N / M	0.098	1.57	1.70	1.22	1.90
ANR3012T2R4□	2.4	N / M	0.087	1.62	1.70	1.17	1.50
ANR3012T2R7M	2.7	M	0.109	1.50	1.50	1.16	1.50
ANR3012T3R3M	3.3	M	0.13	1.38	1.40	1.07	1.50
ANR3012T3R6M	3.6	M	0.129	1.38	1.40	1.07	1.50
ANR3012T3R9M	3.9	M	0.187	1.26	1.30	1.02	1.30
ANR3012T4R7M	4.7	M	0.156	1.26	1.30	0.91	1.00
ANR3012T6R8M	6.8	M	0.247	0.99	1.10	0.76	0.90
ANR3012T100M	10	M	0.345	0.84	0.90	0.61	0.88
ANR3012T120M	12	M	0.445	0.74	0.84	0.49	0.67
ANR3012T150M	15	M	0.468	0.72	0.77	0.46	0.62
ANR3012T180M	18	M	0.702	0.59	0.65	0.44	0.59
ANR3012T220M	22	M	0.839	0.54	0.59	0.43	0.52
ANR3012T270M	27	M	1.12	0.48	0.51	0.36	0.48
ANR3012T330M	33	M	1.138	0.47	0.50	0.37	0.46
ANR3012T360M	36	M	1.223	0.45	0.48	0.35	0.44
ANR3012T390M	39	M	1.712	0.38	0.41	0.30	0.39
ANR3012T470M	47	M	1.885	0.36	0.40	0.27	0.35
ANR3012T560M	56	M	1.776	0.28	0.40	0.26	0.33
ANR3012T680M	68	M	2.149	0.33	0.37	0.24	0.29
ANR3012T820M	82	M	3.269	0.27	0.31	0.17	0.27
ANR3012T101M	100	M	3.681	0.25	0.29	0.21	0.23

### ELECTRICAL CHARACTERISTICS 特性规格表

● ANR3015 Series

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR3015TR50□	0.5	N / M	0.039	2.64	2.80	3.96	4.20
ANR3015T1R0□	1	N / M	0.039	2.39	2.50	2.35	2.80
ANR3015T1R2□	1.2	N / M	0.051	1.98	2.30	2.24	3.10
ANR3015T1R5□	1.5	N / M	0.065	1.73	2.20	2.33	2.70
ANR3015T1R8□	1.8	N / M	0.065	1.73	2.20	1.78	2.20
ANR3015T2R2□	2.2	N / M	0.078	1.62	2.00	1.62	2.00
ANR3015T2R7□	2.7	N / M	0.097	1.45	1.90	1.54	1.90
ANR3015T3R3M	3.3	M	0.104	1.38	1.60	1.34	1.81
ANR3015T3R6M	3.6	M	0.136	1.22	1.50	1.30	1.60
ANR3015T3R9M	3.9	M	0.136	1.22	1.50	1.22	1.40
ANR3015T4R3M	4.3	M	0.149	1.16	1.30	1.22	1.40
ANR3015T4R7M	4.7	M	0.163	1.11	1.30	1.12	1.40
ANR3015T5R1M	5.1	M	0.171	1.07	1.20	1.02	1.20
ANR3015T5R6M	5.6	M	0.245	0.87	1.05	1.02	1.15
ANR3015T6R2M	6.2	M	0.251	0.87	1.00	1.02	1.20
ANR3015T6R8M	6.8	M	0.26	0.86	1.10	0.86	1.10
ANR3015T100M	10	M	0.325	0.78	0.90	0.73	0.92
ANR3015T120M	12	M	0.412	0.69	0.89	0.71	0.90
ANR3015T150M	15	M	0.455	0.66	0.72	0.67	0.88
ANR3015T180M	18	M	0.553	0.60	0.72	0.57	0.72
ANR3015T220M	22	M	0.598	0.58	0.69	0.53	0.68
ANR3015T270M	27	M	0.94	0.46	0.56	0.49	0.56
ANR3015T330M	33	M	1.066	0.44	0.51	0.45	0.53
ANR3015T390M	39	M	1.281	0.40	0.44	0.42	0.55
ANR3015T430M	43	M	1.364	0.38	0.48	0.38	0.43
ANR3015T470M	47	M	1.625	0.36	0.44	0.36	0.43
ANR3015T560M	56	M	1.664	0.35	0.41	0.33	0.42
ANR3015T620M	62	M	2.072	0.30	0.41	0.30	0.40
ANR3015T680M	68	M	3.475	0.23	0.31	0.28	0.37
ANR3015T101M	100	M	4.003	0.21	0.25	0.23	0.25
ANR3015T151M	150	M	4.891	0.19	0.23	0.18	0.22
ANR3015T221M	220	M	5.81	0.35	0.40	0.16	0.20

**ELECTRICAL CHARACTERISTICS 特性规格表**
**● ANR4010 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR4010T1R0□	1	N / M	0.066	1.93	2.40	2.03	2.30
ANR4010T1R5□	1.5	N / M	0.083	1.73	2.00	1.71	2.00
ANR4010T2R2M	2.2	M	0.101	1.52	2.00	1.22	1.50
ANR4010T3R3M	3.3	M	0.119	1.42	1.80	1.12	1.40
ANR4010T4R7M	4.7	M	0.166	1.22	1.50	0.96	1.10
ANR4010T6R8M	6.8	M	0.238	1.02	1.20	0.81	0.95
ANR4010T100M	10	M	0.356	0.76	1.00	0.63	0.75
ANR4010T150M	15	M	0.511	0.61	0.85	0.55	0.61
ANR4010T220M	22	M	0.677	0.51	0.75	0.46	0.52

**● ANR4012 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR4012TR82□	0.82	N / M	0.064	1.67	2.50	3.07	3.30
ANR4012T1R0□	1	N / M	0.065	1.67	2.50	2.65	3.20
ANR4012T1R5□	1.5	N / M	0.085	1.48	2.20	2.13	2.70
ANR4012T1R8□	1.8	N / M	0.104	1.34	1.90	2.15	2.60
ANR4012T2R2□	2.2	N / M	0.104	1.34	1.90	1.79	2.30
ANR4012T2R7□	2.7	N / M	0.116	1.27	1.70	1.93	2.30
ANR4012T3R3□	3.3	N / M	0.143	1.14	1.60	1.75	2.10
ANR4012T3R6□	3.6	N / M	0.142	1.14	1.60	1.22	1.70
ANR4012T4R3□	4.3	N / M	0.18	1.02	1.50	1.60	1.70
ANR4012T4R7□	4.7	N / M	0.163	1.07	1.50	1.17	1.80
ANR4012T5R1□	5.1	N / M	0.199	0.96	1.50	1.57	1.60
ANR4012T5R6□	5.6	N / M	0.182	1.02	1.20	1.02	1.60
ANR4012T6R8M	6.8	M	0.257	0.85	1.20	0.86	1.40
ANR4012T100M	10	M	0.345	0.78	1.00	0.81	1.10
ANR4012T120M	12	M	0.373	0.71	0.95	0.67	1.00
ANR4012T150M	15	M	0.442	0.65	0.85	0.57	0.80
ANR4012T180M	18	M	0.605	0.56	0.80	0.56	0.75
ANR4012T220M	22	M	0.763	0.50	0.75	0.47	0.70
ANR4012T270M	27	M	0.927	0.46	0.60	0.51	0.70
ANR4012T330M	33	M	1.053	0.43	0.58	0.43	0.60
ANR4012T360M	36	M	1.158	0.41	0.56	0.41	0.50
ANR4012T390M	39	M	1.416	0.38	0.50	0.56	0.66
ANR4012T470M	47	M	1.43	0.38	0.50	0.36	0.50
ANR4012T560M	56	M	1.609	0.33	0.46	0.33	0.45

**ELECTRICAL CHARACTERISTICS 特性规格表**
**● ANR4012 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR4012T680M	68	M	2.51	0.27	0.45	0.39	0.45
ANR4012T820M	82	M	2.754	0.26	0.36	0.28	0.40
ANR4012T101M	100	M	2.844	0.25	0.35	0.25	0.30

**● ANR4018 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR4018TR47□	0.47	N / M	0.018	4.06	4.50	4.36	5.20
ANR4018TR68□	0.68	N / M	0.026	3.35	3.80	4.97	5.60
ANR4018T1R0□	1	N / M	0.033	2.03	3.30	4.87	5.20
ANR4018T1R5□	1.5	N / M	0.042	1.83	3.20	3.40	4.00
ANR4018T1R8□	1.8	N / M	0.044	2.03	2.80	3.05	3.40
ANR4018T2R2□	2.2	N / M	0.058	1.67	2.60	2.74	3.20
ANR4018T3R3M	3.3	M	0.09	1.25	2.10	2.49	2.90
ANR4018T4R7M	4.7	M	0.116	1.22	1.80	1.73	2.20
ANR4018T6R8M	6.8	M	0.142	1.08	1.50	1.47	2.00
ANR4018T100M	10	M	0.232	0.85	1.20	1.32	1.60
ANR4018T150M	15	M	0.322	0.66	1.00	0.95	1.10
ANR4018T220M	22	M	0.463	0.60	0.85	0.81	0.88
ANR4018T330M	33	M	0.682	0.50	0.72	0.57	0.75
ANR4018T470M	47	M	0.837	0.43	0.65	0.58	0.70
ANR4018T680M	68	M	1.287	0.32	0.52	0.48	0.51
ANR4018T101M	100	M	2.252	0.25	0.41	0.41	0.44
ANR4018T151M	150	M	3.218	0.22	0.36	0.31	0.34
ANR4018T221M	220	M	5.148	0.17	0.27	0.27	0.30

### ELECTRICAL CHARACTERISTICS 特性规格表

#### ● ANR4020 Series

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20%	Ω	A		A	
Symbol	L	N=±30%	DCR	I <sub>rms</sub>		I <sub>sat</sub>	
ANR4020TR24M	0.24	M	0.014	4.57	5.20	10.66	12.50
ANR4020TR33□	0.33	N / M	0.016	3.35	4.90	7.61	8.50
ANR4020TR47□	0.47	N / M	0.029	3.35	3.70	7.11	7.50
ANR4020TR68□	0.68	N / M	0.036	2.84	3.30	6.50	6.60
ANR4020T1R0□	1	N / M	0.038	2.18	3.20	4.85	5.20
ANR4020T1R2□	1.2	N / M	0.038	2.18	3.20	5.18	5.60
ANR4020T1R5□	1.5	N / M	0.046	2.01	3.00	4.52	4.90
ANR4020T2R2□	2.2	N / M	0.051	1.88	2.80	3.45	3.70
ANR4020T3R3□	3.3	N / M	0.09	1.42	2.50	3.25	3.50
ANR4020T3R6□	3.6	N / M	0.091	1.56	2.50	2.84	3.00
ANR4020T4R7□	4.7	N / M	0.097	1.36	2.00	2.39	2.50
ANR4020T5R1M	5.1	M	0.11	1.29	1.80	2.33	2.50
ANR4020T5R6M	5.6	M	0.116	1.24	1.80	2.23	2.40
ANR4020T6R2M	6.2	M	0.149	1.10	1.60	2.18	2.30
ANR4020T6R8M	6.8	M	0.161	1.06	1.60	2.23	2.40
ANR4020T7R5M	7.5	M	0.149	1.10	1.50	1.88	2.00
ANR4020T8R2M	8.2	M	0.181	1.06	1.40	1.78	1.90
ANR4020T100M	10	M	0.213	0.91	1.20	1.62	1.70
ANR4020T120M	12	M	0.226	0.89	1.20	1.52	1.60
ANR4020T150M	15	M	0.296	0.78	1.10	1.37	1.50
ANR4020T220M	22	M	0.45	0.63	0.87	1.07	1.10
ANR4020T270M	27	M	0.702	0.51	0.70	1.04	1.10
ANR4020T330M	33	M	0.708	0.50	0.68	0.86	0.93
ANR4020T390M	39	M	0.837	0.47	0.64	0.83	0.90
ANR4020T430M	43	M	0.849	0.46	0.63	0.78	0.85
ANR4020T470M	47	M	0.914	0.45	0.61	0.75	0.81
ANR4020T510M	51	M	0.965	0.43	0.59	0.71	0.77
ANR4020T560M	56	M	1.03	0.42	0.57	0.67	0.72
ANR4020T620M	62	M	1.158	0.40	0.52	0.66	0.71
ANR4020T680M	68	M	1.366	0.37	0.50	0.62	0.67
ANR4020T750M	75	M	1.495	0.36	0.49	0.71	0.77
ANR4020T820M	82	M	1.505	0.35	0.47	0.51	0.55
ANR4020T101M	100	M	2	0.31	0.43	0.49	0.53

**ELECTRICAL CHARACTERISTICS 特性规格表**
**● ANR4026 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR4026T1R0□	1	N / M	0.031	3.05	3.66	3.35	3.72
ANR4026T1R2□	1.2	N / M	0.039	2.33	2.80	3.15	3.50
ANR4026T1R5□	1.5	N / M	0.039	2.33	2.80	2.44	2.71
ANR4026T2R2M	2.2	M	0.051	2.03	2.44	2.13	2.36
ANR4026T3R3M	3.3	M	0.064	1.73	2.08	1.83	2.03
ANR4026T4R7M	4.7	M	0.071	1.62	1.94	1.47	1.63
ANR4026T6R8M	6.8	M	0.084	1.52	1.82	1.32	1.47
ANR4026T100M	10	M	0.109	1.32	1.58	1.02	1.13
ANR4026T150M	15	M	0.142	1.12	1.34	0.91	1.01
ANR4026T220M	22	M	0.212	0.91	1.09	0.61	0.68
ANR4026T330M	33	M	0.347	0.71	0.85	0.56	0.62
ANR4026T470M	47	M	0.386	0.66	0.79	0.41	0.46

**● ANR4030 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR4030TR47□	0.47	M	0.015	5.20	5.90	7.80	9.80
ANR4030TR68□	0.68	N / M	0.018	4.63	5.10	6.90	8.00
ANR4030TR91□	0.91	N / M	0.017	4.21	4.70	6.34	6.80
ANR4030T1R0□	1	N / M	0.018	4.21	4.70	5.34	5.70
ANR4030T1R2□	1.2	N / M	0.02	3.88	4.20	5.89	6.30
ANR4030T1R5□	1.5	N / M	0.026	3.39	3.60	4.91	5.30
ANR4030T1R8□	1.8	N / M	0.033	3.25	3.30	4.57	5.00
ANR4030T2R2□	2.2	N / M	0.039	2.99	3.20	4.97	5.80
ANR4030T3R3M	3.3	M	0.051	2.44	2.60	3.35	3.60
ANR4030T3R9M	3.9	M	0.073	2.13	2.30	3.05	3.30
ANR4030T4R3M	4.3	M	0.071	2.13	2.30	2.99	3.20
ANR4030T4R7M	4.7	M	0.077	2.03	2.30	2.94	3.20
ANR4030T5R6M	5.6	M	0.084	1.98	2.10	2.64	2.80
ANR4030T6R8M	6.8	M	0.116	1.62	1.70	2.79	3.00
ANR4030T7R5M	7.5	M	0.11	1.67	1.80	2.23	2.40
ANR4030T8R2M	8.2	M	0.116	1.62	1.70	2.13	2.30
ANR4030T100M	10	M	0.129	1.52	1.60	1.98	2.40
ANR4030T120M	12	M	0.174	1.32	1.40	1.73	1.80
ANR4030T150M	15	M	0.245	1.13	1.20	1.67	1.80
ANR4030T180M	18	M	0.257	1.12	1.20	1.42	1.50
ANR4030T220M	22	M	0.29	1.02	1.20	1.32	1.40

### ELECTRICAL CHARACTERISTICS 特性规格表

#### ● ANR4030 Series

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz, 1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR4030T330M	33	M	0.425	0.85	0.92	1.12	1.20
ANR4030T360M	36	M	0.432	0.84	0.91	1.07	1.10
ANR4030T390M	39	M	0.56	0.74	0.80	1.05	1.10
ANR4030T470M	47	M	0.573	0.73	0.80	0.96	1.00
ANR4030T510M	51	M	0.605	0.71	0.80	0.91	1.13
ANR4030T560M	56	M	0.715	0.66	0.71	0.86	0.94
ANR4030T620M	62	M	0.752	0.64	0.70	0.81	0.99
ANR4030T680M	68	M	1.117	0.53	0.57	0.73	0.80
ANR4030T750M	75	M	1.313	0.49	0.53	0.71	0.88
ANR4030T820M	82	M	1.364	0.48	0.52	0.67	0.72
ANR4030T910M	91	M	1.416	0.47	0.50	0.66	0.71
ANR4030T101M	100	M	1.48	0.46	0.49	0.61	0.73
ANR4030T121M	120	M	1.737	0.43	0.46	0.56	0.60
ANR4030T151M	150	M	2.317	0.30	0.35	0.51	0.55
ANR4030T221M	220	M	3.25	0.35	0.40	0.40	0.50
ANR4030T331M	330	M	5.2	0.25	0.26	0.30	0.40
ANR4030T471□	470	K/M	9.36	0.20	0.23	0.30	0.35
ANR4030T501M	500	M	8.937	0.15	0.20	0.28	0.30
ANR4030T681M	680	M	9.755	0.14	0.18	0.19	0.20

#### ● ANR5012 Series

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz, 1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR5012T1R0□	1	N / M	0.067	2.03	2.40	4.47	4.70
ANR5012T1R5□	1.5	N / M	0.085	1.93	2.20	3.76	3.80
ANR5012T2R2□	2.2	N / M	0.107	1.73	2.00	3.15	3.20
ANR5012T3R3□	3.3	N / M	0.149	1.42	1.70	2.44	2.60
ANR5012T4R7□	4.7	N / M	0.195	1.32	1.50	2.23	2.30
ANR5012T6R8M	6.8	M	0.291	1.02	1.20	1.73	1.90
ANR5012T100M	10	M	0.409	0.86	1.00	1.42	1.50
ANR5012T150M	15	M	0.518	0.81	0.92	1.22	1.30
ANR5012T220M	22	M	0.849	0.61	0.68	0.89	0.98

### ELECTRICAL CHARACTERISTICS 特性规格表

#### ● ANR5020 Series

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20%	Ω	A		A	
Symbol	L	N=±30%	DCR	Irms		Isat	
ANR5020TR22□	0.22	N / M	0.011	5.38	6.00	9.14	12.00
ANR5020TR24□	0.24	N / M	0.011	5.38	6.00	8.12	10.00
ANR5020TR47□	0.47	N / M	0.017	4.67	5.00	6.24	6.70
ANR5020TR56□	0.56	N / M	0.022	3.86	4.20	8.63	9.60
ANR5020TR68□	0.68	N / M	0.022	4.06	4.40	5.58	6.00
ANR5020TR75□	0.75	N / M	0.022	4.06	4.40	5.58	6.00
ANR5020T1R0□	1	N / M	0.026	3.86	4.10	4.16	5.00
ANR5020T1R2□	1.2	N / M	0.033	3.60	3.90	4.57	4.90
ANR5020T1R5□	1.5	N / M	0.034	3.25	3.50	4.16	4.50
ANR5020T2R2□	2.2	N / M	0.042	2.94	3.10	3.25	4.00
ANR5020T2R7□	2.7	N / M	0.049	2.74	2.90	2.94	3.50
ANR5020T3R0□	3	N / M	0.049	2.74	2.90	2.59	2.80
ANR5020T3R3□	3.3	N / M	0.056	2.54	2.70	2.59	3.00
ANR5020T3R6□	3.6	N / M	0.055	2.54	2.70	2.84	3.00
ANR5020T3R9□	3.9	N / M	0.071	2.54	2.70	2.33	2.80
ANR5020T4R3M	4.3	M	0.073	2.23	2.40	2.54	3.00
ANR5020T4R7M	4.7	M	0.074	2.23	2.40	2.54	2.70
ANR5020T5R1M	5.1	M	0.082	2.08	2.20	2.28	2.60
ANR5020T5R6M	5.6	M	0.1	2.08	2.20	2.33	2.50
ANR5020T6R8M	6.8	M	0.107	1.83	1.90	2.08	2.20
ANR5020T7R5M	7.5	M	0.116	1.78	1.90	1.88	2.00
ANR5020T8R2M	8.2	M	0.126	1.67	1.80	1.88	2.00
ANR5020T9R1M	9.1	M	0.142	1.57	1.70	1.73	1.80
ANR5020T100M	10	M	0.142	1.57	1.70	1.73	1.80
ANR5020T120M	12	M	0.18	1.42	1.50	1.52	1.60
ANR5020T150M	15	M	0.215	1.27	1.30	1.37	1.40
ANR5020T180M	18	M	0.257	1.17	1.20	1.27	1.30
ANR5020T220M	22	M	0.294	1.12	1.20	1.17	1.20
ANR5020T330M	33	M	0.507	0.91	0.99	0.93	1.00
ANR5020T470M	47	M	0.68	0.78	0.84	0.78	0.84
ANR5020T560M	56	M	0.957	0.71	0.77	0.78	0.84
ANR5020T680M	68	M	0.962	0.65	0.70	0.66	0.70
ANR5020T820M	82	M	1.146	0.51	0.60	0.66	0.75
ANR5020T101M	100	M	1.43	0.54	0.58	0.54	0.58
ANR5020T121M	120	M	1.737	0.41	0.50	0.43	0.53
ANR5020T201M	200	M	2.574	0.41	0.45	0.30	0.33
ANR5020T561M	560	M	9.06	0.20	0.30	0.24	0.30

### ELECTRICAL CHARACTERISTICS 特性规格表

#### ● ANR5040 Series

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR5040TR22□	0.22	N / M	0.008	6.60	7.50	18.27	20.00
ANR5040TR24□	0.24	N / M	0.008	6.50	7.40	15.94	18.00
ANR5040TR47□	0.47	N / M	0.013	6.70	7.60	10.15	11.50
ANR5040T1R0□	1	N / M	0.018	4.97	5.10	7.46	8.20
ANR5040T1R2□	1.2	N / M	0.021	4.21	4.30	6.60	7.10
ANR5040T1R5□	1.5	N / M	0.02	4.36	4.80	6.39	7.30
ANR5040T1R8□	1.8	N / M	0.027	4.21	4.30	5.58	6.40
ANR5040T2R2□	2.2	N / M	0.027	3.86	4.30	4.97	5.60
ANR5040T2R7□	2.7	N / M	0.029	3.65	4.10	4.36	5.10
ANR5040T3R0□	3	N / M	0.029	3.65	4.20	4.21	4.80
ANR5040T3R3□	3.3	N / M	0.031	3.45	3.90	4.01	4.60
ANR5040T3R6□	3.6	N / M	0.031	3.35	3.70	3.86	4.40
ANR5040T3R9□	3.9	N / M	0.035	3.25	3.70	3.60	4.20
ANR5040T4R7□	4.7	N / M	0.041	3.05	3.30	3.55	3.90
ANR5040T5R6M	5.6	M	0.046	2.84	3.10	3.05	4.10
ANR5040T6R8M	6.8	M	0.056	2.54	2.80	2.94	3.50
ANR5040T8R2M	8.2	M	0.074	2.33	2.60	2.74	3.00
ANR5040T100M	10	M	0.083	2.13	2.40	2.39	2.90
ANR5040T120M	12	M	0.099	2.03	2.10	2.23	2.50
ANR5040T150M	15	M	0.112	2.03	2.10	2.03	2.30
ANR5040T180M	18	M	0.153	1.47	1.65	1.73	2.00
ANR5040T220M	22	M	0.168	1.52	1.60	1.62	1.90
ANR5040T270M	27	M	0.242	1.12	1.25	1.54	1.75
ANR5040T330M	33	M	0.244	1.22	1.40	1.32	1.50
ANR5040T470M	47	M	0.354	1.02	1.10	1.12	1.30
ANR5040T510M	51	M	0.489	1.02	1.10	1.02	1.20
ANR5040T560M	56	M	0.494	0.81	0.90	1.07	1.20
ANR5040T680M	68	M	0.52	0.81	0.90	0.91	1.10
ANR5040T750M	75	M	0.579	0.73	0.80	0.86	0.95
ANR5040T101M	100	M	0.728	0.71	0.80	0.76	0.90
ANR5040T151M	150	M	0.975	0.61	0.70	0.66	0.67
ANR5040T221M	220	M	1.82	0.41	0.50	0.49	0.55
ANR5040T301M	300	M	2.574	0.36	0.40	0.51	0.58
ANR5040T331M	330	M	2.703	0.41	0.50	0.43	0.47
ANR5040T471M	470	M	3.9	0.36	0.40	0.38	0.43
ANR5040T561M	560	M	4.914	0.31	0.35	0.31	0.36
ANR5040T681M	680	M	5.07	0.25	0.30	0.30	0.35
ANR5040T102M	1000	M	7.8	0.20	0.23	0.21	0.25
ANR5040T222M	2200	M	14.82	0.11	0.12	0.15	0.18

**ELECTRICAL CHARACTERISTICS 特性规格表**
**● ANR5045 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR5045T2R2M	2.2	M	0.029	4.77	5.40	6.50	7.20
ANR5045T100M	10	M	0.078	2.54	2.90	3.25	3.70
ANR5045T220M	22	M	0.161	1.57	1.80	2.03	2.35

**● ANR6020 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR6020TR50□	0.5	N / M	0.018	4.06	5.00	4.57	6.00
ANR6020TR68□	0.68	N / M	0.022	3.86	4.80	6.65	7.80
ANR6020TR82□	0.82	N / M	0.022	3.86	4.80	5.38	6.30
ANR6020T1R0□	1	N / M	0.026	3.55	4.40	4.21	5.00
ANR6020T1R2□	1.2	N / M	0.029	3.25	4.00	5.99	7.00
ANR6020T1R5□	1.5	N / M	0.029	3.25	4.00	4.31	5.10
ANR6020T1R8□	1.8	N / M	0.036	2.79	3.50	4.92	5.80
ANR6020T2R0□	2	N / M	0.046	2.64	3.30	4.16	4.90
ANR6020T2R2□	2.2	N / M	0.036	2.79	3.50	3.81	4.50
ANR6020T2R7□	2.7	N / M	0.046	2.64	3.30	3.96	4.60
ANR6020T3R3□	3.3	N / M	0.046	2.64	3.30	3.20	3.70
ANR6020T3R9□	3.9	N / M	0.063	2.13	2.60	3.30	3.90
ANR6020T4R3□	4.3	N / M	0.063	2.13	2.60	2.74	3.20
ANR6020T4R7□	4.7	N / M	0.074	2.03	2.50	3.05	3.60
ANR6020T5R6□	5.6	N / M	0.089	1.93	2.40	2.44	2.90
ANR6020T6R2□	6.2	N / M	0.102	1.83	2.30	2.33	2.70
ANR6020T6R8□	6.8	N / M	0.102	1.83	2.30	2.23	2.60
ANR6020T8R2□	8.2	N / M	0.136	1.42	1.80	2.13	2.50
ANR6020T100M	10	M	0.136	1.42	1.80	1.78	2.10
ANR6020T120M	12	M	0.154	1.32	1.60	1.47	1.70
ANR6020T150M	15	M	0.187	1.22	1.50	1.22	1.40
ANR6020T180M	18	M	0.232	1.10	1.40	1.22	1.40
ANR6020T220M	22	M	0.262	1.02	1.30	1.07	1.20
ANR6020T330M	33	M	0.386	0.85	1.05	0.96	1.10
ANR6020T470M	47	M	0.553	0.81	0.90	0.71	0.90
ANR6020T331M	330	M	3.385	0.33	0.39	0.27	0.33
ANR6020T101M	100	M	1.2	0.50	0.58	0.64	0.84

**ELECTRICAL CHARACTERISTICS 特性规格表**
**● ANR6028 Series**

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR6028TR82□	0.82	N / M	0.016	5.28	6.00	6.60	9.00
ANR6028T1R0□	1	N / M	0.018	5.28	5.70	5.84	7.00
ANR6028T1R2□	1.2	N / M	0.017	4.65	5.00	6.50	7.50
ANR6028T1R5□	1.5	N / M	0.017	4.65	5.00	6.09	6.60
ANR6028T2R2□	2.2	N / M	0.026	3.81	4.10	5.18	5.60
ANR6028T2R7□	2.7	N / M	0.033	3.81	4.10	3.86	4.10
ANR6028T3R3□	3.3	N / M	0.033	3.53	3.80	4.21	4.50
ANR6028T4R7□	4.7	N / M	0.039	3.13	3.40	3.05	3.30
ANR6028T5R1□	5.1	N / M	0.055	2.64	2.80	3.25	3.50
ANR6028T6R2M	6.2	M	0.06	2.44	2.60	3.10	3.30
ANR6028T6R8M	6.8	M	0.06	2.44	2.60	2.64	3.00
ANR6028T8R2M	8.2	M	0.071	2.28	2.50	2.33	2.50
ANR6028T9R1M	9.1	M	0.095	2.18	2.40	2.59	2.80
ANR6028T100M	10	M	0.093	1.98	2.40	2.07	2.50
ANR6028T120M	12	M	0.103	1.88	2.00	1.83	2.00
ANR6028T150M	15	M	0.161	1.47	1.60	1.78	1.90
ANR6028T180M	18	M	0.154	1.47	1.60	1.54	1.80
ANR6028T220M	22	M	0.18	1.42	1.60	1.47	1.80
ANR6028T270M	27	M	0.2	1.34	1.40	1.52	1.60
ANR6028T330M	33	M	0.239	1.24	1.30	1.37	1.50
ANR6028T360M	36	M	0.277	1.15	1.20	1.27	1.40
ANR6028T390M	39	M	0.29	1.12	1.20	1.27	1.40
ANR6028T470M	47	M	0.406	1.08	1.10	1.17	1.30
ANR6028T560M	56	M	0.445	0.90	1.00	1.07	1.20
ANR6028T680M	68	M	0.463	0.87	0.95	0.81	0.95
ANR6028T750M	75	M	0.528	0.82	0.90	0.91	0.99
ANR6028T820M	82	M	0.644	0.71	0.77	0.81	0.88
ANR6028T101M	100	M	0.774	0.71	0.77	0.66	0.71
ANR6028T151M	150	M	0.78	0.70	0.80	0.80	0.88
ANR6028T221M	220	M	1.729	0.50	0.57	0.40	0.50
ANR6028T401M	400	M	2.78	0.41	0.45	0.30	0.33
ANR6028T471M	470	M	3.505	0.33	0.37	0.28	0.32
ANR6028T102M	1000	M	7.54	0.23	0.26	0.18	0.22

### ELECTRICAL CHARACTERISTICS 特性规格表

#### ● ANR6045 Series

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20%	Ω	A		A	
Symbol	L	N=±30%	DCR	Irms		Isat	
ANR6045TR47□	0.47	N / M	0.012	6.60	6.60	15.23	16.50
ANR6045TR56□	0.56	N / M	0.012	6.60	6.60	14.21	15.00
ANR6045TR68□	0.68	N / M	0.012	5.79	6.50	11.17	12.00
ANR6045TR82□	0.82	N / M	0.013	5.99	6.50	10.51	11.00
ANR6045T1R0□	1	N / M	0.014	5.22	5.60	10.00	10.00
ANR6045T1R2□	1.2	N / M	0.016	5.48	5.90	8.48	9.10
ANR6045T1R3□	1.3	N / M	0.013	5.48	5.90	8.48	9.10
ANR6045T1R5□	1.5	N / M	0.016	5.02	5.40	8.93	9.70
ANR6045T1R8□	1.8	N / M	0.016	5.02	5.40	7.71	8.40
ANR6045T2R2□	2.2	N / M	0.023	4.67	5.00	6.85	7.40
ANR6045T2R3□	2.3	N / M	0.027	3.55	3.80	6.09	6.60
ANR6045T2R7□	2.7	N / M	0.02	4.36	4.70	5.84	6.30
ANR6045T3R0□	3	N / M	0.026	3.86	4.20	5.68	6.20
ANR6045T3R3□	3.3	N / M	0.027	3.76	4.00	5.99	6.20
ANR6045T3R6□	3.6	N / M	0.027	3.76	4.00	5.33	5.70
ANR6045T4R3M	4.3	M	0.03	3.55	3.80	4.52	4.90
ANR6045T4R5M	4.5	M	0.034	3.35	3.60	5.04	5.50
ANR6045T4R7M	4.7	M	0.034	3.35	3.60	5.04	5.50
ANR6045T5R1M	5.1	M	0.034	3.35	3.60	4.47	4.80
ANR6045T5R6M	5.6	M	0.038	3.20	3.40	4.21	4.60
ANR6045T6R2M	6.2	M	0.04	3.05	3.30	4.50	4.80
ANR6045T6R3M	6.3	M	0.04	3.05	3.30	4.50	4.70
ANR6045T6R8M	6.8	M	0.048	3.05	3.30	3.96	4.30
ANR6045T7R5M	7.5	M	0.044	2.94	3.20	3.55	3.80
ANR6045T8R2M	8.2	M	0.06	2.64	2.80	3.96	4.30
ANR6045T9R1M	9.1	M	0.055	2.64	2.80	3.40	3.70
ANR6045T100M	10	M	0.062	2.49	2.70	3.25	3.50
ANR6045T120M	12	M	0.074	2.23	2.40	2.84	3.00
ANR6045T150M	15	M	0.088	2.08	2.20	2.54	2.70
ANR6045T180M	18	M	0.104	1.88	2.00	2.23	2.40
ANR6045T220M	22	M	0.116	1.83	2.00	2.08	2.20
ANR6045T270M	27	M	0.132	1.67	1.80	1.93	2.10
ANR6045T300M	30	M	0.17	1.52	1.60	1.73	1.80
ANR6045T330M	33	M	0.178	1.47	1.60	1.67	1.80
ANR6045T360M	36	M	0.223	1.42	1.50	1.64	1.80
ANR6045T390M	39	M	0.232	1.27	1.40	1.52	1.60
ANR6045T430M	43	M	0.257	1.22	1.30	1.65	1.80
ANR6045T470M	47	M	0.26	1.22	1.30	1.42	1.50
ANR6045T510M	51	M	0.266	1.17	1.20	1.37	1.50
ANR6045T560M	56	M	0.287	1.12	1.20	1.32	1.40

Specifications subject to change without notice. Please check our website for latest information.

### ELECTRICAL CHARACTERISTICS 特性规格表

#### ● ANR6045 Series

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR6045T620M	62	M	0.303	1.12	1.20	1.27	1.40
ANR6045T680M	68	M	0.376	1.02	1.10	1.22	1.30
ANR6045T750M	75	M	0.393	0.96	1.00	1.17	1.20
ANR6045T820M	82	M	0.5	0.91	0.99	1.07	1.10
ANR6045T910M	91	M	0.462	0.86	0.94	1.02	1.10
ANR6045T101M	100	M	0.563	0.81	0.88	0.96	1.00
ANR6045T121M	120	M	0.623	0.78	0.85	0.86	0.94
ANR6045T151M	150	M	0.754	0.71	0.77	0.81	0.88
ANR6045T221M	220	M	1.084	0.60	0.65	0.71	0.77
ANR6045T331M	330	M	1.651	0.58	0.63	0.58	0.63
ANR6045T471M	470	M	2.34	0.43	0.48	0.51	0.56
ANR6045T681M	680	M	3.25	0.33	0.38	0.43	0.46
ANR6045T102M	1000	M	5.85	0.30	0.35	0.30	0.35
ANR6045T152M	1500	M	8.1	0.21	0.24	0.24	0.29

#### ● ANR8040 Series

Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR8040TR82□	0.82	N / M	0.01	6.39	6.90	14.01	16.00
ANR8040T1R0□	1	N / M	0.01	6.39	6.90	10.00	14.00
ANR8040T1R2□	1.2	N / M	0.013	5.73	6.20	10.15	14.00
ANR8040T1R5□	1.5	N / M	0.013	5.73	6.20	8.27	11.00
ANR8040T2R0□	2	N / M	0.016	5.23	5.60	9.39	10.00
ANR8040T2R2□	2.2	N / M	0.016	5.23	5.60	7.21	8.00
ANR8040T3R0□	3	N / M	0.018	4.77	5.20	6.19	7.00
ANR8040T3R3□	3.3	N / M	0.022	4.47	4.80	6.60	7.00
ANR8040T3R6□	3.6	N / M	0.022	4.42	4.80	7.63	8.50
ANR8040T3R9□	3.9	N / M	0.022	4.42	4.80	5.84	6.50
ANR8040T4R7□	4.7	N / M	0.025	4.16	4.50	5.99	6.50
ANR8040T5R1□	5.1	N / M	0.025	4.11	4.40	4.77	5.40
ANR8040T5R6□	5.6	N / M	0.027	3.91	4.20	6.09	6.90
ANR8040T6R2□	6.2	N / M	0.027	3.91	4.20	4.52	5.10
ANR8040T6R8M	6.8	M	0.031	3.65	4.00	4.62	5.20
ANR8040T8R2M	8.2	M	0.034	3.50	3.80	4.26	4.80
ANR8040T100M	10	M	0.038	3.35	3.60	3.65	4.10
ANR8040T120M	12	M	0.052	2.84	3.00	3.55	4.00
ANR8040T150M	15	M	0.06	2.64	2.80	2.99	3.40

**ELECTRICAL CHARACTERISTICS 特性规格表**
**● ANR8040 Series**


Part Number	Inductance	Inductance Tolerance M=±20% N=±30%	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH		Ω	A		A	
Symbol	L		DCR	I <sub>rms</sub>		I <sub>sat</sub>	
ANR8040T180M	18	M	0.068	2.44	2.60	2.74	3.10
ANR8040T220M	22	M	0.089	2.13	2.30	2.44	2.70
ANR8040T270M	27	M	0.1	2.03	2.20	2.18	2.50
ANR8040T330M	33	M	0.125	1.83	2.00	2.08	2.40
ANR8040T360M	36	M	0.132	1.78	1.90	2.03	2.30
ANR8040T390M	39	M	0.138	1.73	1.90	1.98	2.20
ANR8040T430M	43	M	0.146	1.67	1.80	1.93	2.20
ANR8040T470M	47	M	0.175	1.57	1.70	1.78	2.00
ANR8040T510M	51	M	0.183	1.52	1.60	1.73	1.90
ANR8040T560M	56	M	0.19	1.47	1.60	1.57	1.70
ANR8040T620M	62	M	0.235	1.32	1.40	1.52	1.60
ANR8040T680M	68	M	0.252	1.27	1.40	1.47	1.60
ANR8040T750M	75	M	0.271	1.22	1.30	1.37	1.50
ANR8040T820M	82	M	0.29	1.17	1.20	1.32	1.40
ANR8040T910M	91	M	0.35	1.07	1.10	1.22	1.30
ANR8040T101M	100	M	0.373	1.02	1.10	1.17	1.30
ANR8040T121M	120	M	0.43	0.96	1.00	1.07	1.10
ANR8040T151M	150	M	0.528	0.86	0.94	1.12	1.20
ANR8040T181M	180	M	0.669	0.84	0.92	0.96	1.15
ANR8040T221M	220	M	0.771	0.81	0.88	0.86	0.94
ANR8040T331M	330	M	1.144	0.65	0.70	0.69	0.75
ANR8040T471M	470	M	1.609	0.51	0.60	0.61	0.70
ANR8040T681M	680	M	0.45	0.50	0.50	0.60	2.652
ANR8040T102M	1000	M	0.35	0.40	0.40	0.50	3.64
ANR8040T152M	1500	M	0.26	0.27	0.32	0.38	6.5

**ELECTRICAL CHARACTERISTICS 特性规格表**
**● ANR8065 Series**


Part Number	Inductance	Inductance Tolerance	DC Resistance	Heat Rating Current		Saturation Current	
	@100kHz,1V		Max.	Max.	Typ.	Max.	Typ.
Units	μH	M=±20% N=±30%	Ω	A		A	
Symbol	L		DCR	Irms		Isat	
ANR8065TR68M	0.68	M	0.008	7.61	8.50	24.36	26.00
ANR8065T1R0M	1	M	0.011	7.11	8.00	20.30	22.00
ANR8065T2R2M	2.2	M	0.016	5.28	4.50	14.01	12.00
ANR8065T3R3M	3.3	M	0.018	5.18	5.90	9.64	10.00
ANR8065T4R7M	4.7	M	0.022	4.77	5.40	8.63	9.50
ANR8065T5R6M	5.6	M	0.026	4.57	5.20	8.12	9.00
ANR8065T6R8M	6.8	M	0.026	4.57	5.20	7.61	8.00
ANR8065T8R2M	8.2	M	0.031	4.26	4.80	7.11	7.70
ANR8065T100M	10	M	0.044	3.25	3.70	8.12	8.90
ANR8065T150M	15	M	0.052	3.30	3.75	5.79	6.70
ANR8065T220M	22	M	0.071	2.74	3.10	4.36	4.80
ANR8065T470M	47	M	0.15	1.88	2.15	3.45	3.70
ANR8065T560M	56	M	0.196	1.37	1.55	3.25	3.70
ANR8065T680M	68	M	0.216	1.57	1.80	2.74	3.20
ANR8065T101M	100	M	0.277	1.37	1.45	2.03	2.40
ANR8065T151M	150	M	0.436	0.96	1.10	1.62	2.00
ANR8065T221M	220	M	0.649	0.81	0.90	1.22	1.50
ANR8065T331M	330	M	0.832	0.76	0.85	1.02	1.20
ANR8065T471M	470	M	1.544	0.56	0.65	1.02	1.20
ANR8065T681M	680	M	1.925	0.53	0.60	0.86	1.00
ANR8065T102M	1000	M	2.82	0.40	0.45	0.65	0.73

- All test data is referenced to 20°C ambient.
- Rated current: Isat or Irms, whichever is smaller.
- Isat: DC current at which the inductance drops approximate 30% from its value without current.
- Irms: DC current that causes the temperature rise ( $\Delta T = 40^{\circ}\text{C}$ ) from 20°C ambient.


CHARACTERISTICS(REFERENCE) 特征曲线

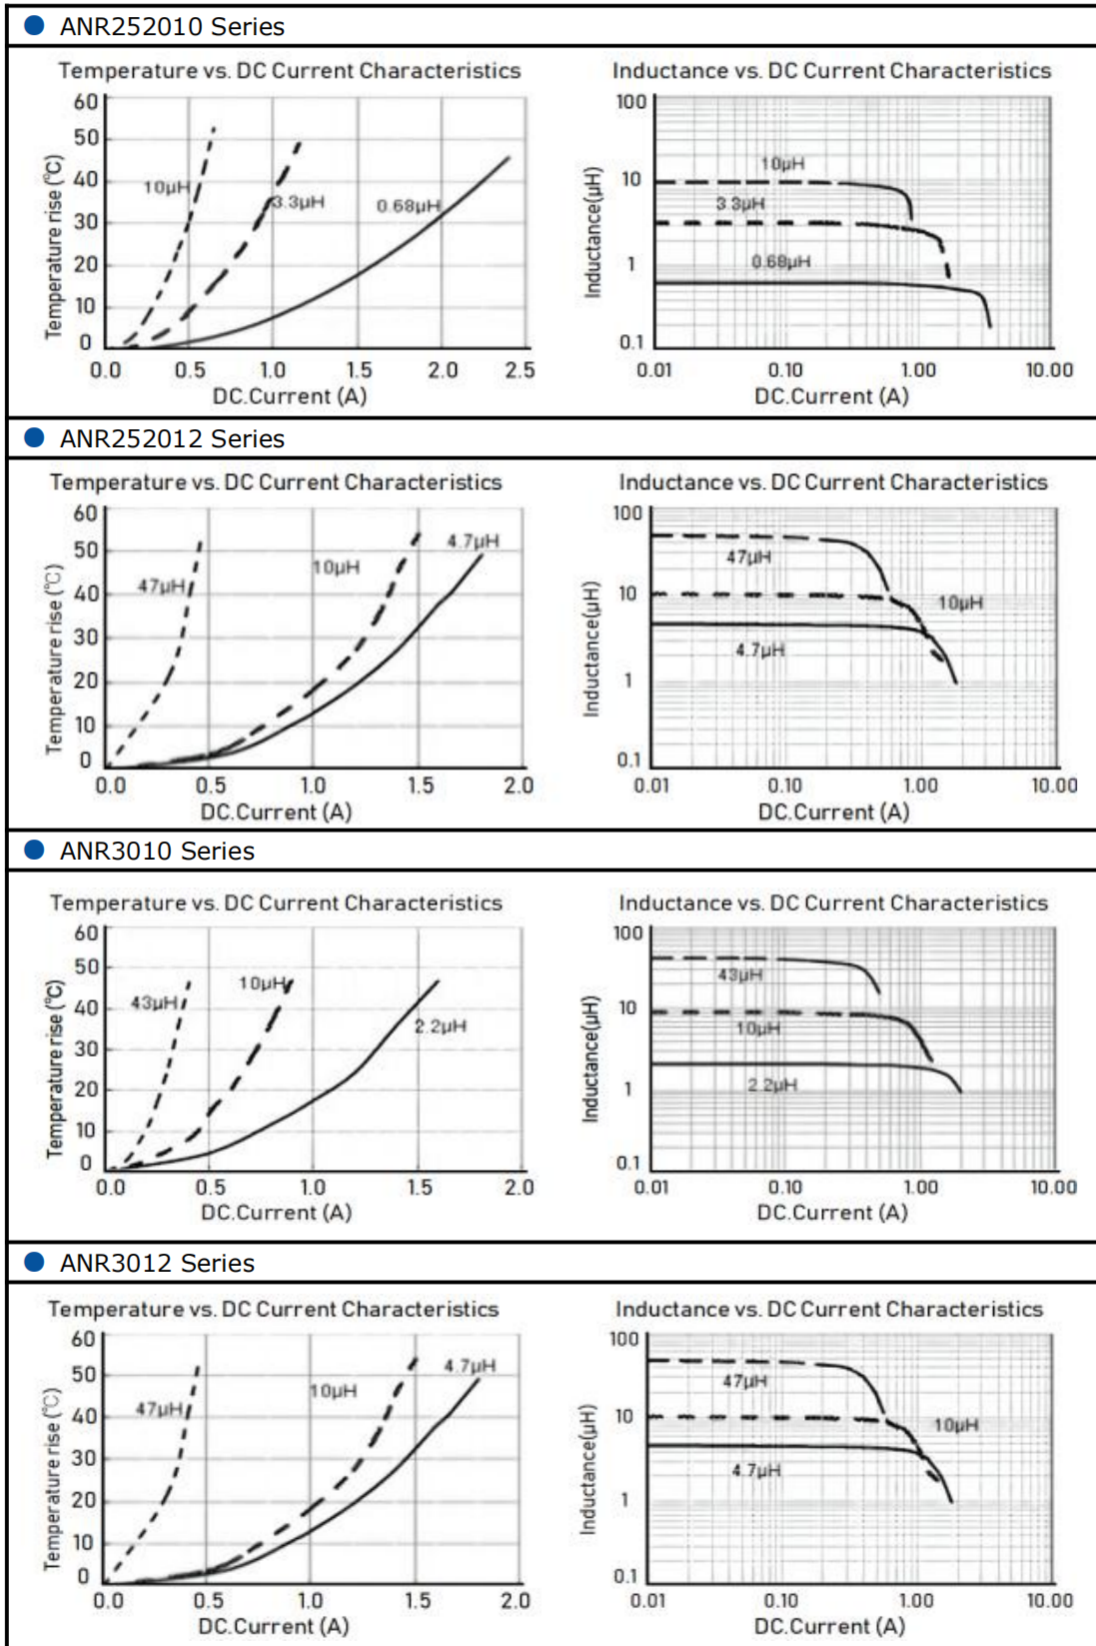


CHARACTERISTICS(REFERENCE) 特征曲线

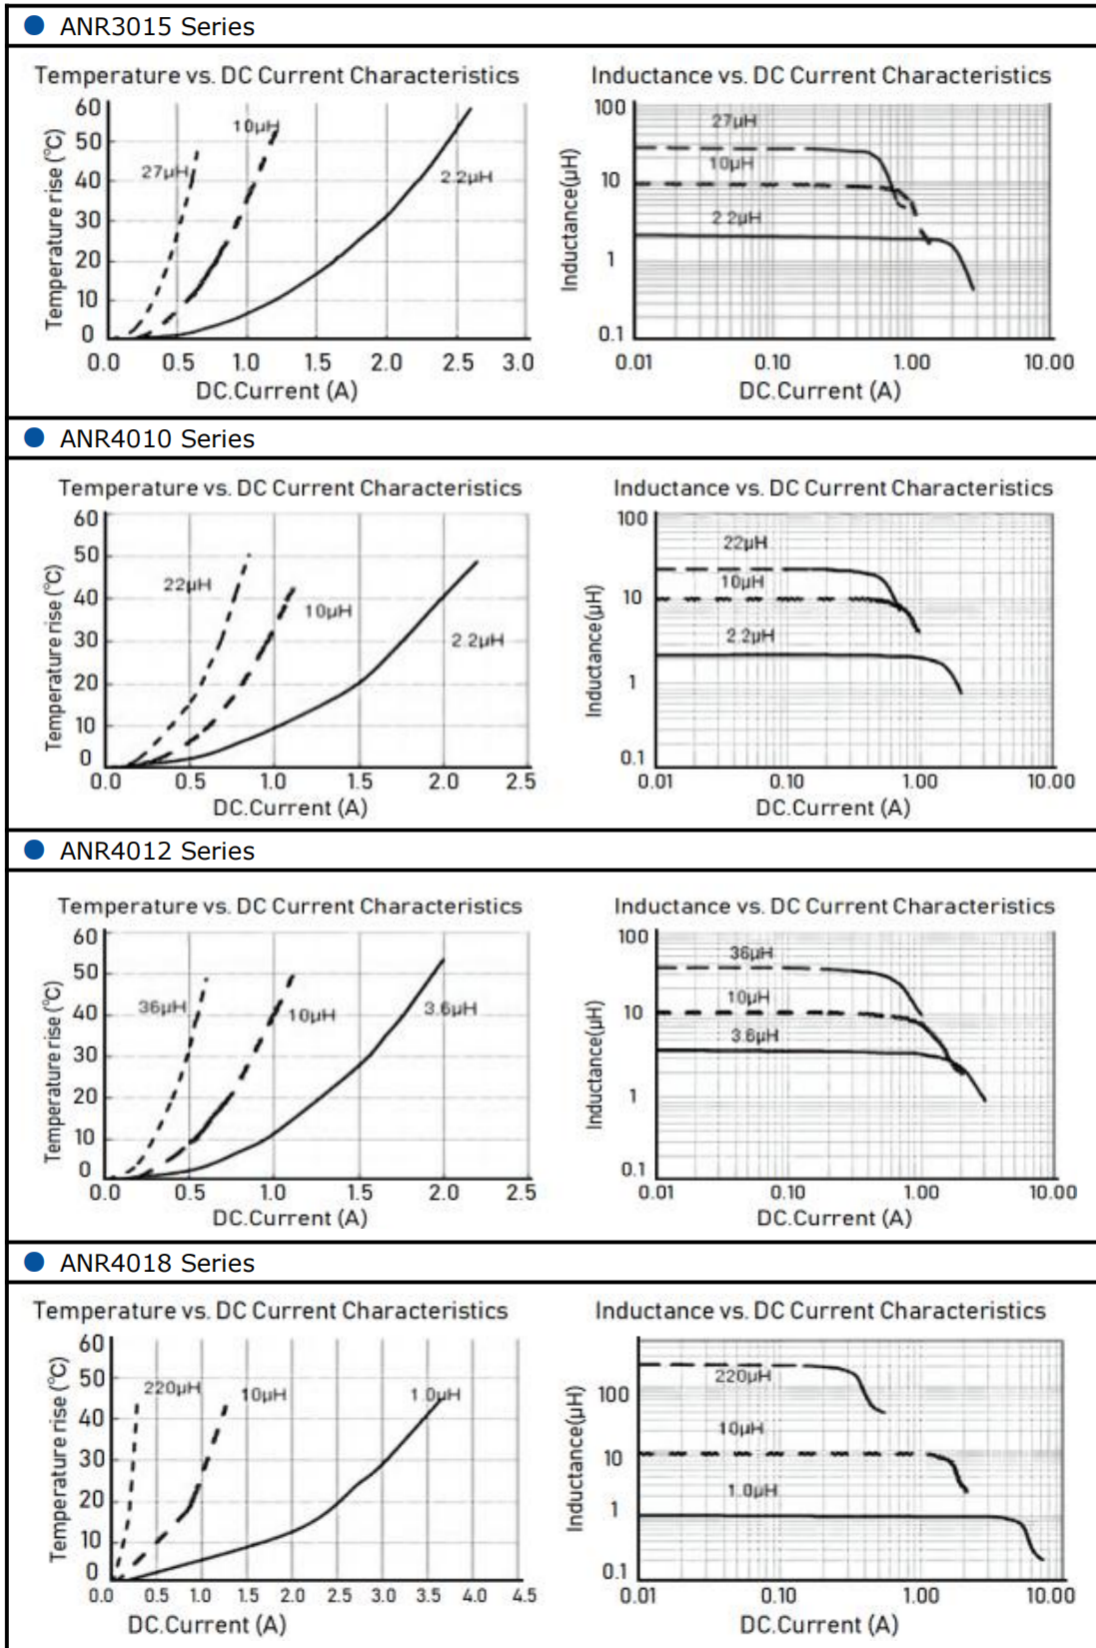


CHARACTERISTICS(REFERENCE) 特征曲线

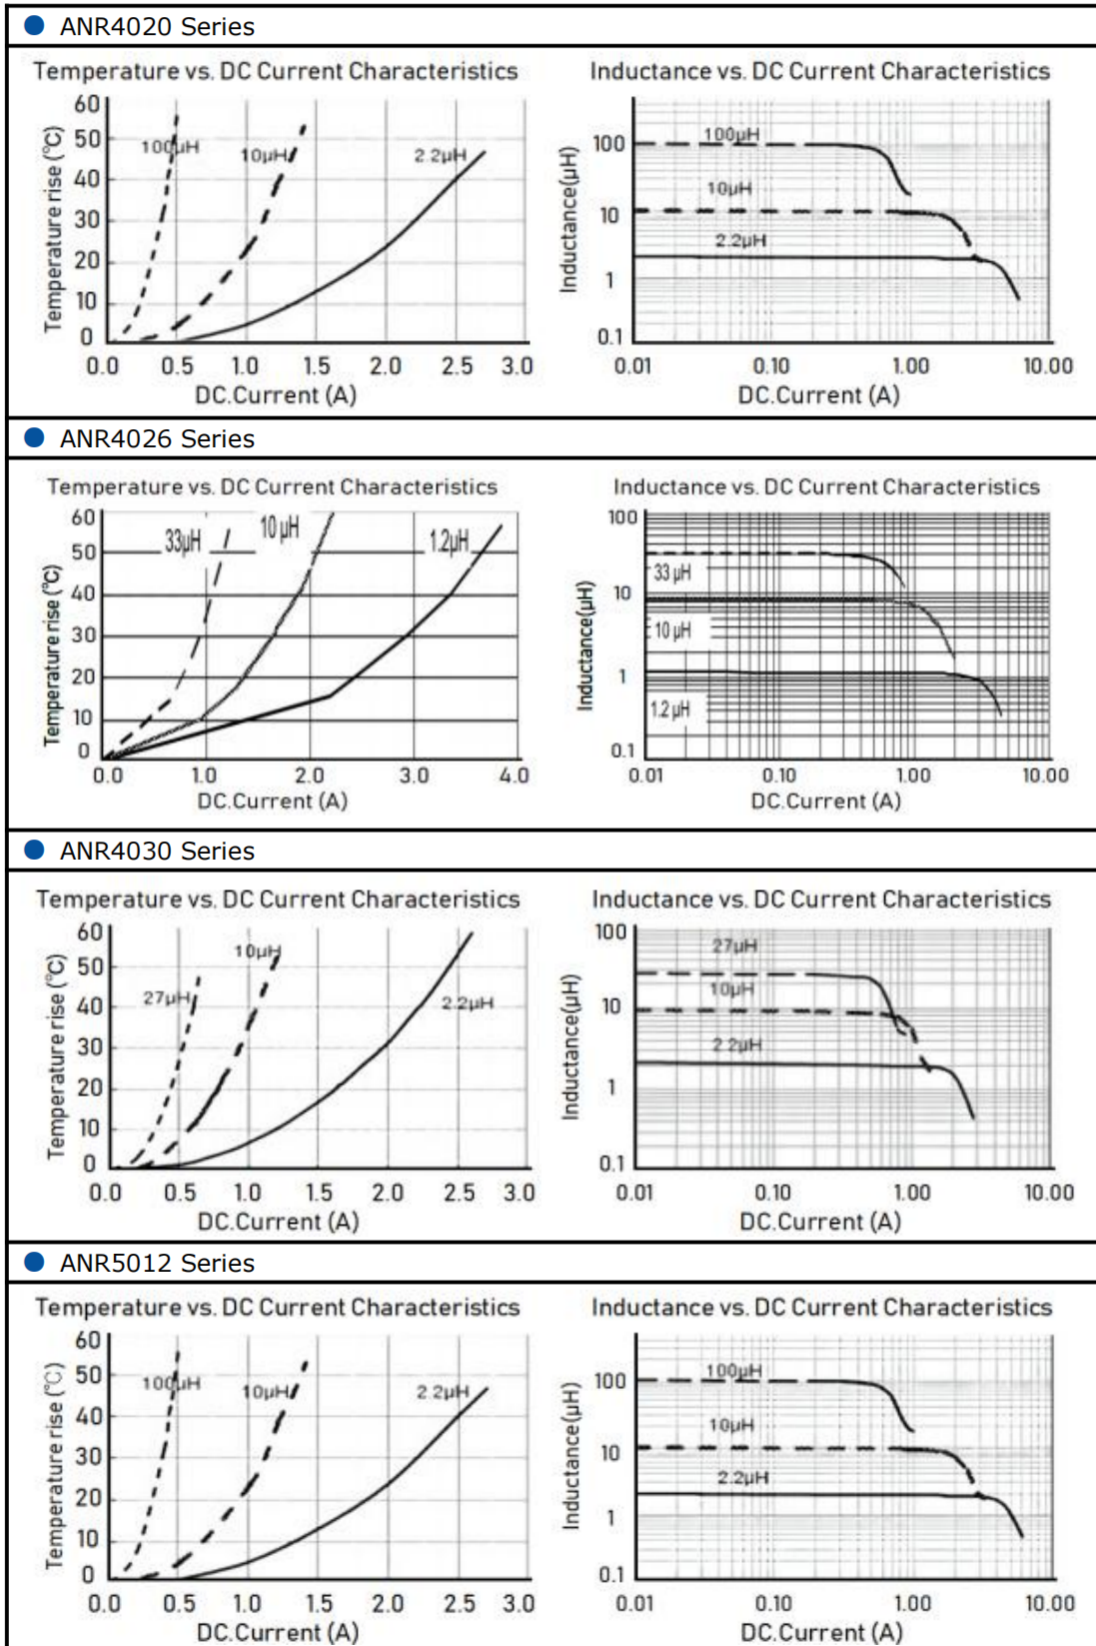

CHARACTERISTICS(REFERENCE) 特征曲线

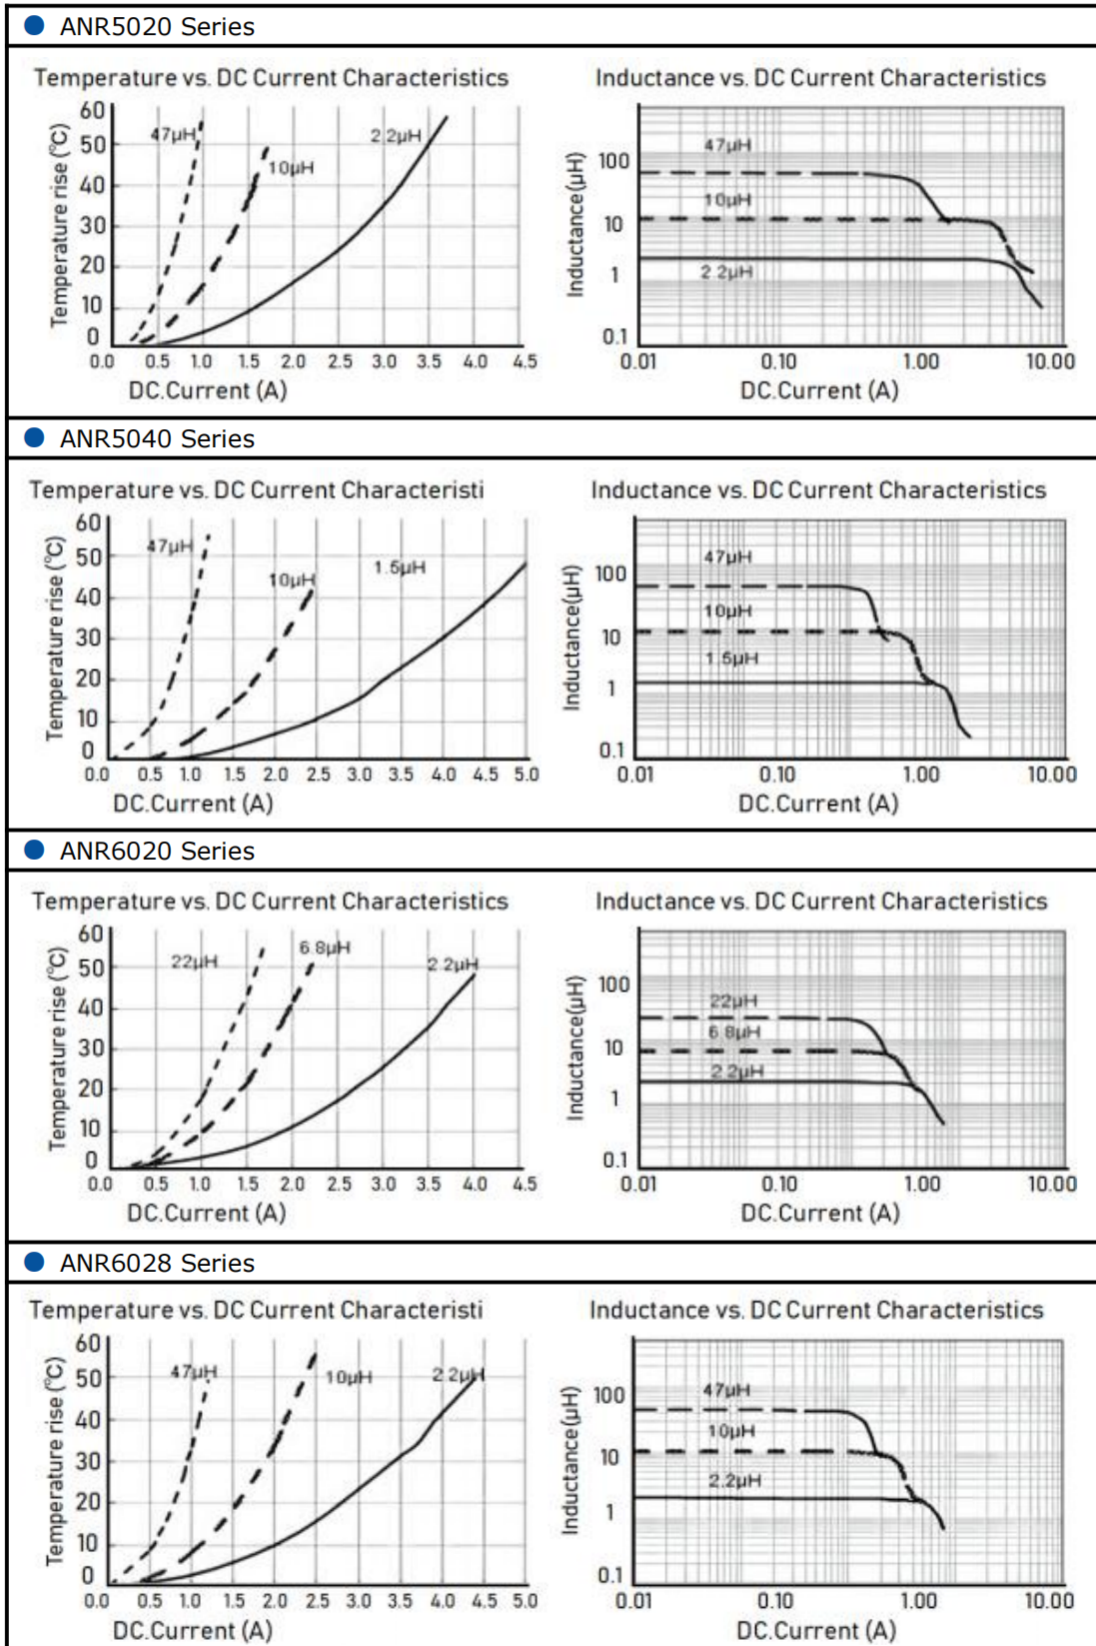

CHARACTERISTICS(REFERENCE) 特征曲线

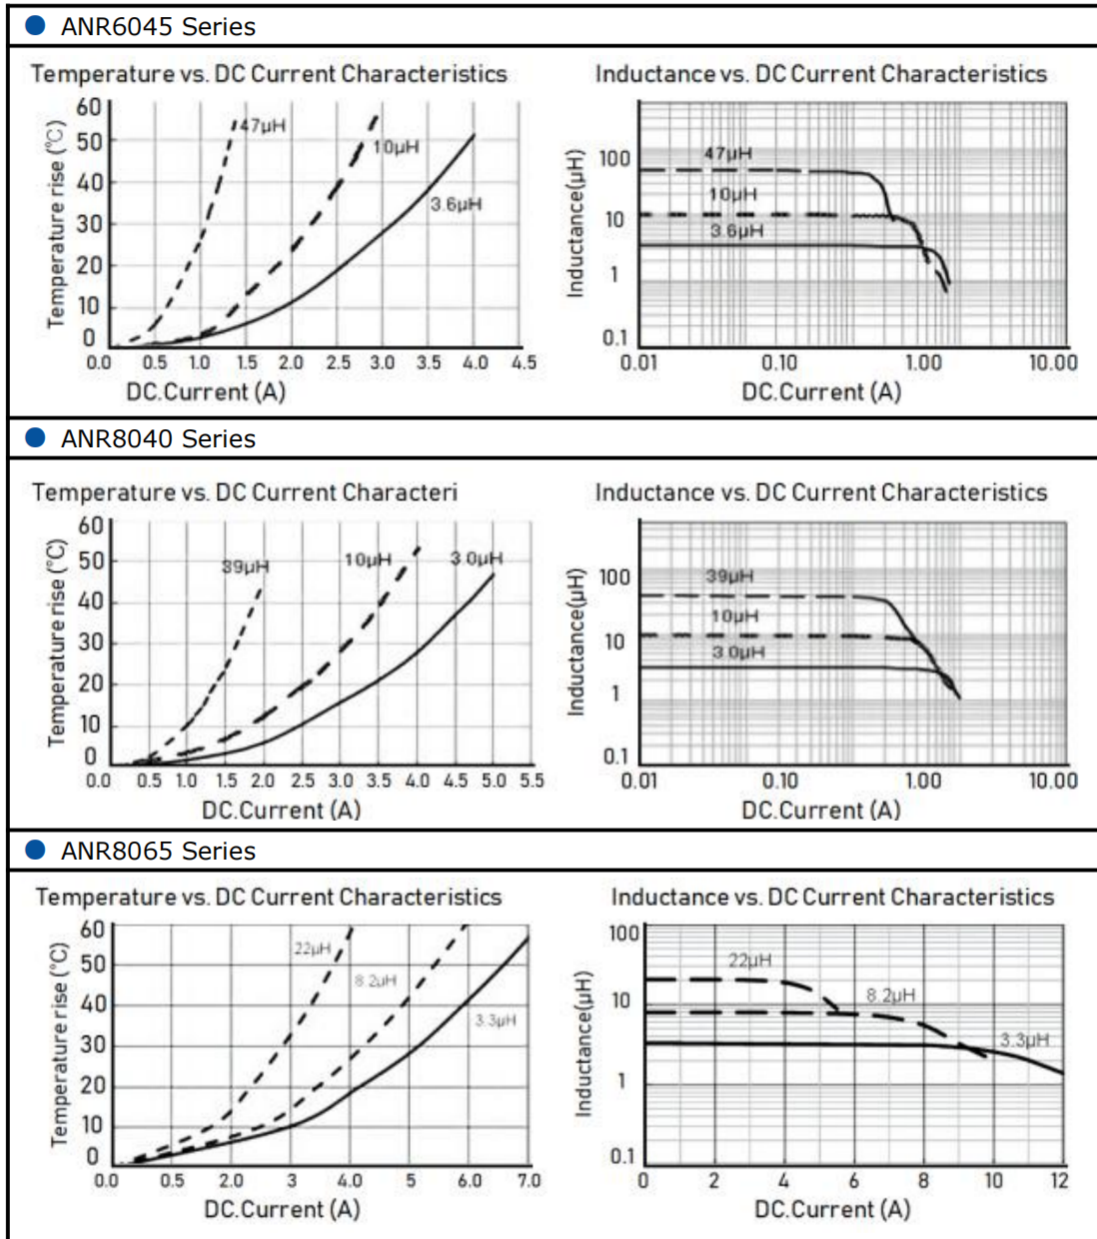

**RELIABILITY TEST 可靠性测试**


Item		Requirements	Test Methods and Remarks
1	Low temperature storage	Inductance shall be within $\pm 10\%$ of the initial value.	Placed at $-40^{\circ}\text{C}$ for 500 hours, then measured at room ambient temperature after placing 24 hours
2	High temperature storage	Inductance shall be within $\pm 10\%$ of the initial value.	Placed at $+125^{\circ}\text{C}$ for 500 hours, then measured at room ambient temperature after placing 24 hours
3	Thermal shock	Inductance shall be within $\pm 10\%$ of the initial value.	Condition for 1 cycle: $-40^{\circ}\text{C}$ , 30min. $\sim +125^{\circ}\text{C}$ , 30min Number of cycles: 5
4	Humidity resistance	Inductance shall be within $\pm 10\%$ of the initial value. Insulation resistance $> 100\text{M}\Omega$ at DC.	Placed at 90 to 95%RH, $+50^{\circ}\text{C}$ for 500 hours, then measured at room ambient temperature after placing 24 hours.
5	Drop	Inductance shall be within $\pm 10\%$ of the initial value.	Drop specimen three times on concrete floor from a height of 1 meter which mounted on test board.
6	Vibration	Inductance shall be within $\pm 10\%$ of the initial value.	Frequency: 10~55~10Hz Amplitude: 1.5mm or 10G Sweep time: 1 oct/min Test Directions: X, Y, Z Test Time: 2 hours each direction.
7	Terminal strength	No detachment of terminal pin and no breakage of wire.	Add static load 4.9N(500gf) to inductor through hole of test board for $10 \pm 2$ sec.
8	Soldering heat resistance	Inductance shall be within $\pm 10\%$ of the initial value. Appearance: No damage.	Dip Inductor's terminal in solder bath of following conditions: 1) $260 \pm 5^{\circ}\text{C}$ , $10 \pm 1$ sec, 2) $350 \pm 10^{\circ}\text{C}$ , $3.5 \pm 0.5$ sec

RECOMMENDED SOLDERING TECHNOLOGIES 回流焊建议

Soldering Materials

- ◆ (1) Solder: Sn-3.0Ag-0.5Cu
- ◆ (2) Flux: Use rosin-based flux, but not strongly acidic flux (with chlorine exceeding 0.2wt%). Do not use water-soluble flux.

Reflow Soldering Profile

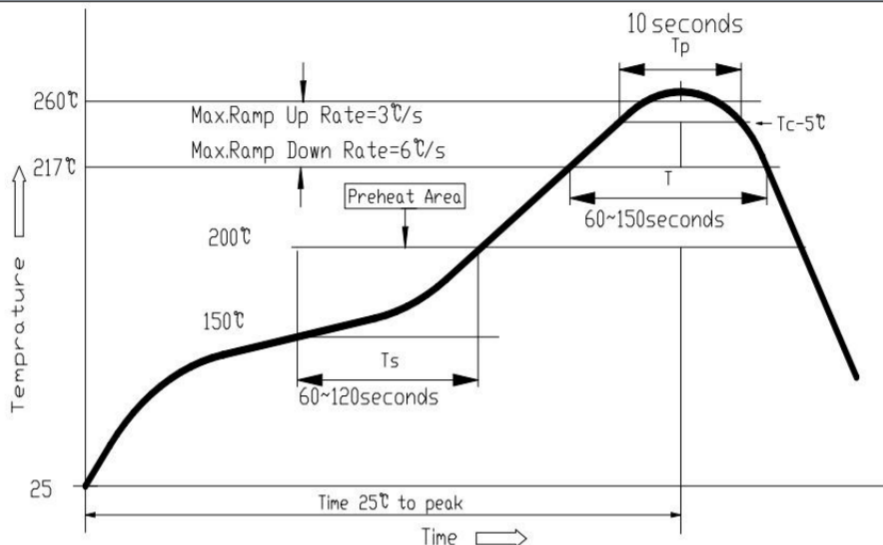

Soldering Iron


Reworking with electric soldering iron must preheating at 150°C for 1 minute is required, and do not directly touch the core with the tip of the soldering iron. The reworking soldering conditions are as follows.

- ◆ Temperature of soldering iron tip: 350°C;
- ◆ Soldering iron power output: ≤30W;
- ◆ Diameter of soldering iron end: ≤1.0mm;
- ◆ Soldering time: <3 s



### PACKAGING 包装


● Packaging (unit: mm)

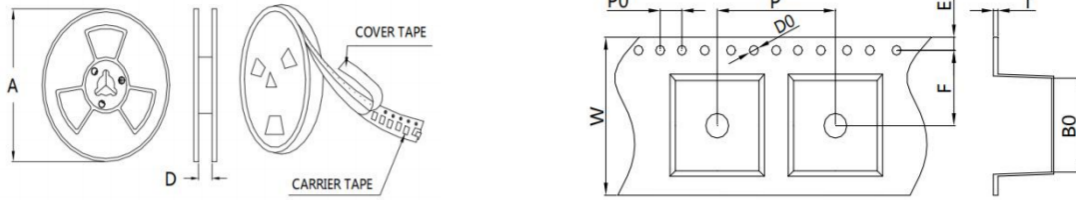

Size	W	B0	P	T	E	F	D0	P0
ANR252010	8.0±0.3	2.65±0.2	4.0±0.1	0.25±0.1	1.75±0.1	3.5±0.1	1.5±0.1	4.0±0.2
ANR252012	8.0±0.3	2.65±0.2	4.0±0.1	0.25±0.1	1.75±0.1	3.5±0.1	1.5±0.1	4.0±0.2
ANR3010	8.0±0.2	3.2±0.1	4.0±0.1	0.22±0.05	1.75±0.1	3.5±0.1	1.5±0.1	4.0±0.2
ANR3012	8.0±0.3	3.3±0.15	4.0±0.1	0.3±0.1	1.75±0.1	3.5±0.1	1.5±0.1	4.0±0.2
ANR3015	8.0±0.3	3.3±0.15	4.0±0.1	0.3±0.1	1.75±0.1	3.5±0.1	1.5±0.1	4.0±0.2
ANR4010	12.0±0.3	4.4±0.2	8.0±0.3	0.3±0.1	1.75±0.1	5.5±0.2	1.5±0.1	4.0±0.2
ANR4012	12.0±0.3	4.4±0.2	8.0±0.3	0.3±0.1	1.75±0.1	5.5±0.2	1.5±0.1	4.0±0.2
ANR4018	12.0±0.3	4.4±0.2	8.0±0.3	0.3±0.1	1.75±0.1	5.5±0.2	1.5±0.1	4.0±0.2
ANR4020	12.0±0.3	4.4±0.2	8.0±0.3	0.3±0.1	1.75±0.1	5.5±0.2	1.5±0.1	4.0±0.2
ANR4026	12.0±0.3	4.4±0.2	8.0±0.3	0.3±0.1	1.75±0.1	5.5±0.2	1.5±0.1	4.0±0.2
ANR4030	12.0±0.3	4.4±0.2	8.0±0.3	0.3±0.1	1.75±0.1	5.5±0.2	1.5±0.1	4.0±0.2
ANR5012	12.0±0.3	5.5±0.3	8.0±0.3	0.4±0.1	1.75±0.1	5.5±0.1	1.5±0.1	4.0±0.2
ANR5020	12.0±0.3	5.5±0.3	8.0±0.3	0.4±0.1	1.75±0.1	5.5±0.1	1.5±0.1	4.0±0.2
ANR5040	12.0±0.3	5.5±0.3	8.0±0.3	0.4±0.1	1.75±0.1	5.5±0.1	1.5±0.1	4.0±0.2
ANR5045	12.0±0.3	5.5±0.3	8.0±0.3	0.4±0.1	1.75±0.1	5.5±0.1	1.5±0.1	4.0±0.2
ANR6020	12.0±0.3	6.5±0.15	8.0±0.3	0.4±0.1	1.75±0.1	5.5±0.1	1.5±0.1	4.0±0.2
ANR6028	12.0±0.3	6.5±0.15	8.0±0.3	0.4±0.1	1.75±0.1	5.5±0.1	1.5±0.1	4.0±0.2
ANR6045	12.0±0.3	6.5±0.15	8.0±0.3	0.4±0.1	1.75±0.1	5.5±0.1	1.5±0.1	4.0±0.2
ANR8040	16.0±0.3	8.4±0.1	12±0.1	0.4±0.1	1.75±0.1	7.5±0.1	1.5±0.1	4.0±0.2
ANR8065	16.0±0.3	8.4±0.1	12±0.1	0.4±0.1	1.75±0.1	7.5±0.1	1.5±0.1	4.0±0.2

Size	A	D	Quantity / Reel	Size	A	D	Quantity / Reel
ANR252010	Φ178+2.0	8.5	2000 Pcs	ANR4030	Φ330+2.0	12.5	2000 Pcs
ANR252012	Φ178+2.0	8.5	2000 Pcs	ANR5012	Φ330+2.0	12.5	4500 Pcs
ANR3010	Φ178+2.0	8.5	2000 Pcs	ANR5020	Φ330+2.0	12.5	2500 Pcs
ANR3012	Φ178+2.0	8.5	2000 Pcs	ANR5040	Φ330+2.0	12.5	1500 Pcs
ANR3015	Φ178+2.0	8.5	2000 Pcs	ANR5045	Φ330+2.0	12.5	1500 Pcs
ANR4010	Φ330+2.0	12.5	4500 Pcs	ANR6020	Φ330+2.0	12.5	2500 Pcs
ANR4012	Φ330+2.0	12.5	4500 Pcs	ANR6028	Φ330+2.0	12.5	2000 Pcs
ANR4018	Φ330+2.0	12.5	3000 Pcs	ANR6045	Φ330+2.0	12.5	1500 Pcs
ANR4020	Φ330+2.0	12.5	3000 Pcs	ANR8040	Φ330+2.0	16.5	1000 Pcs
ANR4026	Φ330+2.0	12.5	2500 Pcs	ANR8065	Φ330+2.0	16.5	700 Pcs

- Peel-off strength: 10~100gf.
- Peel-off angle: 165°-180°.
- Peel-off speed: 300mm/min.

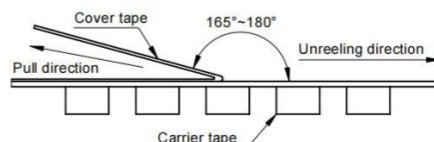

## ■ PRECAUTIONS ON USE 使用注意事项

### ● Precautions.

#### ➤ Surface mounting

- ◆ Mounting and soldering condition should be checked beforehand.
- ◆ Applicable soldering process to this product is reflow soldering only.
- ◆ Recommended conditions for repair by soldering iron:

Preheat the circuit board with product to repair at 150°C for about 1 minute.

Put soldering iron on the land-pattern.

Soldering iron's temperature: 350°C maximum/Duration: 3 seconds maximum/1 time for each terminal.

The soldering iron should not directly touch the inductor.

Product once removes from the circuit board may not be used again. Put soldering iron on the land-pattern.

#### ➤ Handling

- ◆ Keep the products away from all magnets and magnetic objects.
- ◆ Be careful not to subject the products to excessive mechanical shocks.
- ◆ Please avoid applying impact to the products after mounted on pc board.
- ◆ Avoid ultrasonic cleaning.

#### ➤ Storage

- ◆ To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.
- ◆ Recommended conditions: -10°C~40°C, 70%RH (Max.)
- ◆ Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, product should be used with one year from the time of delivery.
- ◆ In case of storage over 6 months, solderability shall be checked before actual usage.

#### ➤ Guarantee

- ◆ The guaranteed operating conditions of the products are in accordance with the conditions specified in this specification.
- ◆ Please note that APV takes no responsibility for any failure and/or abnormality which is caused by use under other than the aforesaid operating conditions.

## ■ SAFETY REMINDERS 注意事项

## SAFETY REMINDERS

The Company shall not guarantee the suitability, performance, or quality for the following applications that require a high level of safety and reliability, or where equipment failure, malfunction, or abnormal operation may cause damage to human life, physical well-being, or property, and may have significant social impacts (hereinafter referred to as "specific applications"). If you intend to use this product in the application scenarios listed below, or if you have special requirements exceeding the scope or conditions specified in each product catalog, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment
- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.