

FEATURES

- Guard ring protection
- Low forward voltage drop
- For use in low voltage, high frequency inverters
- High surge current capability

VOLTAGE RANGE

60 Volts

CURRENT

1.0 A



SOD- 323

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Parameter	Symbols	B16WS	Units
Maximum recurrent peak reverse voltage	V_{RRM}	60	V
Maximum RMS voltage	V_{RMS}	42	V
Maximum DC blocking voltage	V_{DC}	60	V
Continuous forward current	I_F	1	A
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	0.1 @ $V_R=60V$	mA
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	25	A
Maximum Instantaneous Forward Voltage	V_F	0.7 @ $I_F=1.0A$	V
Total capacitance $V_R=4V, f=1MHz$	C_{tot}	120	pF
Total power dissipation	P_{tot}	250	mW
Thermal Resistance, Junction to Ambient Air	$R_{\theta JA}$	400	°C/W
Junction Temperature	T_j	125	°C
Storage Temperature	T_{stg}	-55 ~ +150	°C

RATING AND CHARACTERISTIC CURVES

Fig.1 Power Derating Curve

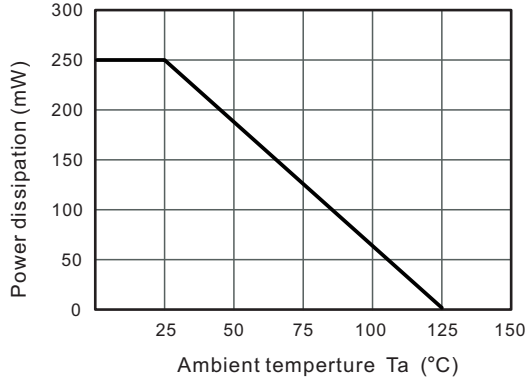


Fig.2 Typical Reverse Characteristics

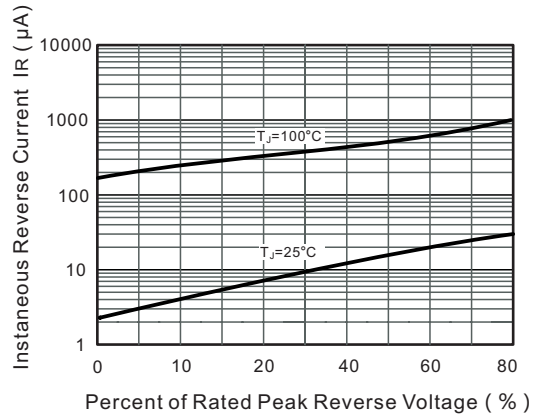


Fig.3 TYPICAL FORWARD VOLTAGE

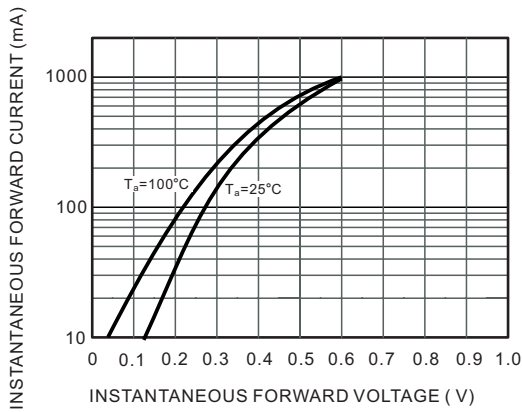


Fig.4 Typical Junction Capacitance

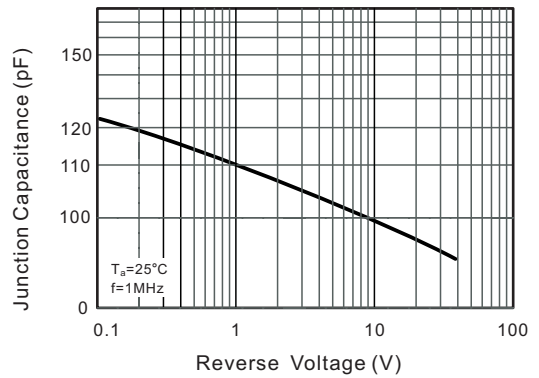


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


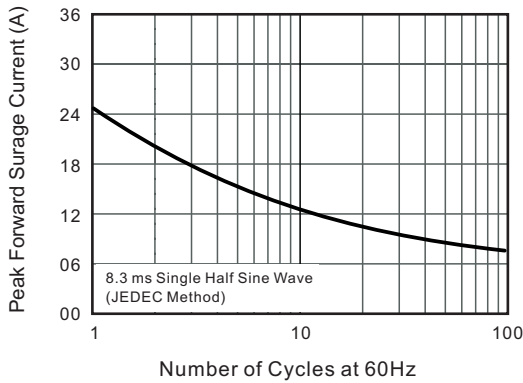


Fig.6 Typical Transient Thermal Impedance




Soldering parameters

Reflow Condition		Pb-Free assembly (see as below)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

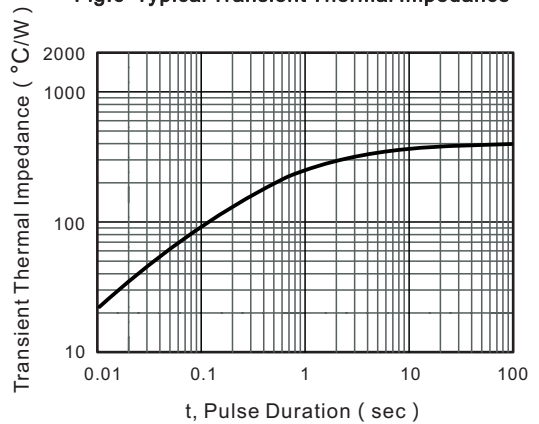


Package Dimensions & Suggested Pad Layout

SOD323

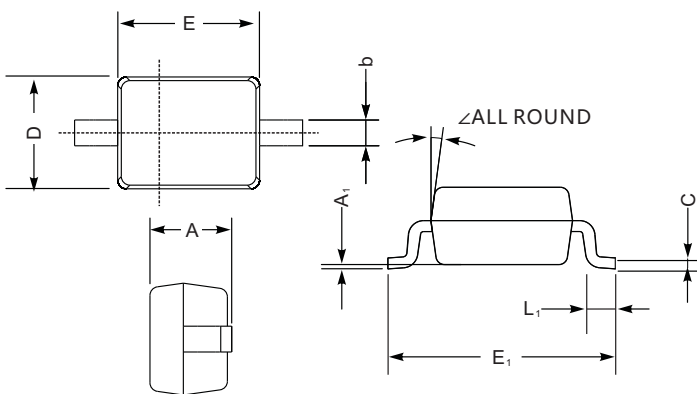



SOD-323 mechanical data

UNIT		A	C	D	E	E ₁	b	L ₁	A ₁	z
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2	9°
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—	
mil	max	43	5.9	55	70	108	16	16	8	
	min	32	3.1	47	63	100	9.8	7.9	—	

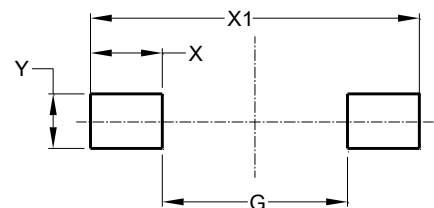

Dimensions	Value (in mm)
G	1.40
X	1.20
X1	3.80
Y	1.00

Tape & reel specification

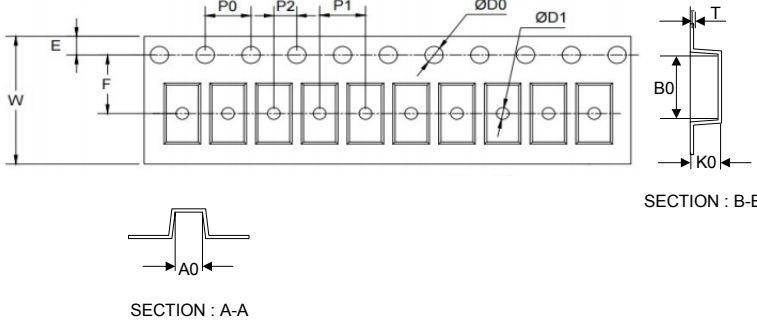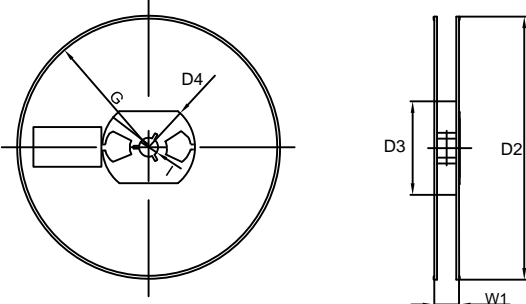Tape	Symbol	Dimension (mm)	
	P0	4.00±0.20	
	P1	4.00±0.20	
	P2	2.00±0.20	
	D0	1.55±0.20	
	D1	1.00±0.20	
	E	1.55±0.25	
	F	3.60±0.20	
	W	8.00±0.20	
	A0	2.00±0.20	
	B0	3.25±0.20	
	K0	1.35±0.20	
	T	0.23±0.10	
	<p>7" Reel</p> 	D2	177.0±5.0
		D3	55Min.
		D4	R24.6±2.0
G		R82.0±2.0	
I		13.0±2.0	
W1		10.20±3.0	
Quantity: 3000PCS			