
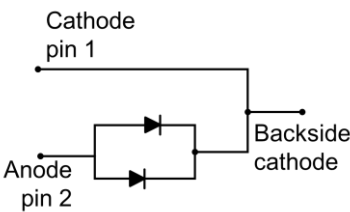


HD080N140A4R

1400V-80A Silicon Carbide Schottky Diode

Product features/产品特点

- Highly stable switching performance
高度稳定的开关性能
- Extremely fast reverse recovery time
极快的反向恢复时间
- High forward surge capability I_{FSM}
高正向浪涌电流耐受能力 I_{FSM}
- Superior in efficiency to Silicon Diode alternatives
效率优于硅基二极管替代方案
- Reduced losses in associated MOSFET
降低关联 MOSFET 的损耗
- Reduced EMI
电磁干扰 EMI 降低
- Reduced cooling requirements
减少散热需求
- High junction operating temperature capability $T_{vj(max)}=175^{\circ}C$
高结温工作能力，最高结温 $T_{vj(max)}=175^{\circ}C$



Applications/应用领域

- Switching mode power supplies
开关模式电源
- Uninterruptible Power Supply
不间断电源 (UPS)
- Motor Drives
电机驱动器
- Power Factor Correction
功率因数校正



Key performance and package parameters/关键性能和封装信息

Type	V_{DC}	I_F	$Q_{r,typ}$	$T_{vj,max}$	Marking	Package
HD080N140A4R	1400V	80A	218nC	175°C	HD080N140R	TO-247-2L

HD080N140A4R

1400V-80A Silicon Carbide Schottky Diode



1. Maximum ratings at $T_{vj}=25^{\circ}\text{C}$, unless otherwise specified.

最大额定值 默认 $T_{vj}=25^{\circ}\text{C}$ 除非另有说明

Table 1 Maximum ratings/最大额定值

Parameter 参数	Symbol 符号	Test conditions 测试条件	Value 值	Unit 单位
Repetitive peak reverse voltage 重复峰值反向电压	V_{RMM}	$T_{vj}\geq 25^{\circ}\text{C}$	1400	V
Crest working reverse voltage 最高工作反向电压	V_{RWM}	$T_{vj}\geq 25^{\circ}\text{C}$	1400	V
Continuous forward current 连续正向电流	I_F	$T_C\leq 130^{\circ}\text{C}, D=1$	75	A
		$T_C\leq 125^{\circ}\text{C}, D=1$	80	
		$T_C\leq 25^{\circ}\text{C}, D=1$	160	
Surge repetitive forward current, sine halfwave 浪涌重复正向电流, 正弦半波	$I_{F, RM}$	$D=0.5; t_p=25\mu\text{s}; T_C\leq 125^{\circ}\text{C}; \text{square-wave pulse}$	99	A
Surge non-repetitive forward current, sine halfwave 浪涌非重复峰值正向电流, 正弦半波	$I_{F, SM}$	$t_p=10\text{ms}; T_{vj(\text{init})}=25^{\circ}\text{C}; \text{sine-wave pulse}$	600	A
I^2t for fusing 熔断 I^2t 特性	i^2dt	$t_p=10\text{ms}; T_{vj(\text{init})}=25^{\circ}\text{C}; \text{sine-wave pulse}$	744	A^2S
Power dissipation 总耗散功率	P_{tot}	$T_C=25^{\circ}\text{C} @ R_{\text{th(j-c).typ}}$	789	W
		$T_C=25^{\circ}\text{C} @ R_{\text{th(j-c).MAX}}$	535	
Mounting torque 安装扭矩	M_d	M3 and M3.5 screw M3或者M3.5螺钉	0.6	Nm



2. Thermal characteristics
热特性

Table 2 Thermal characteristics/热特性

Parameter 参数	Symbol 符号	Test conditions 测试条件	Value/值			Unit 单位
			Min.	Typ.	Max.	
Storage temperature 存储温度	T _{stg}		-55		175	°C
Operating junction temperature 工作结温	T _{vj}		-55		175	°C
Thermal resistance, junction-case 结-壳热阻	R _{th(j-c)}			0.19	0.28	K/W
Thermal resistance, junction-ambient 结-环境热阻	R _{th(j-a)}			40		K/W
Soldering temperature 焊接温度	T _{sold}				260	°C

HD080N140A4R

1400V-80A Silicon Carbide Schottky Diode



3. Electrical characteristics at $T_{vj}=25^{\circ}\text{C}$, unless otherwise specified.

电气特性 默认 $T_{vj}=25^{\circ}\text{C}$ 除非另有说明

Table 3 Static characteristics/静态特性

Parameter 参数	Symbol 符号	Test conditions 测试条件		Value/值			Unit 单位
				Min.	Typ.	Max.	
DC blocking voltage 直流阻断电压	V_{DC}	$I_R=20\mu\text{A}$		1400			V
Forward current 正向压降	V_F	$I_F=80\text{A}$	$T_{vj}=25^{\circ}\text{C}$		1.57	1.70	V
			$T_{vj}=175^{\circ}\text{C}$		2.40		
Zero gate voltage drain current 集电极-发射极漏电流	I_R	$V_R=1400\text{V}$				80	μA

Table 4 Dynamic characteristics/动态特性


Parameter 参数	Symbol 符号	Test conditions 测试条件		Value/值			Unit 单位
				Min.	Typ.	Max.	
Recovered charge 反向恢复电荷	Q_r	$V_R=400\text{V}, I_F=80\text{A}, di_F/dt=500\text{A}/\mu\text{s}$			218		nC
Diode capacitance 二极管电容	C_d	$f=1\text{MHz}, V_R=1\text{V}$			3344		pF
		$f=1\text{MHz}, V_R=400\text{V}$			323		
		$f=1\text{MHz}, V_R=800\text{V}$			240		
Non-repetitive avalanche energy 非重复雪崩能量	E_{AS}	$V_{DD}=100\text{V}, I_R=20\text{A}, L=10\text{mH}$			698		mJ

4. Electrical characteristics diagrams

电气特性图表


Power dissipation/耗散功率

$$P_{\text{tot}}=f(T_c);$$

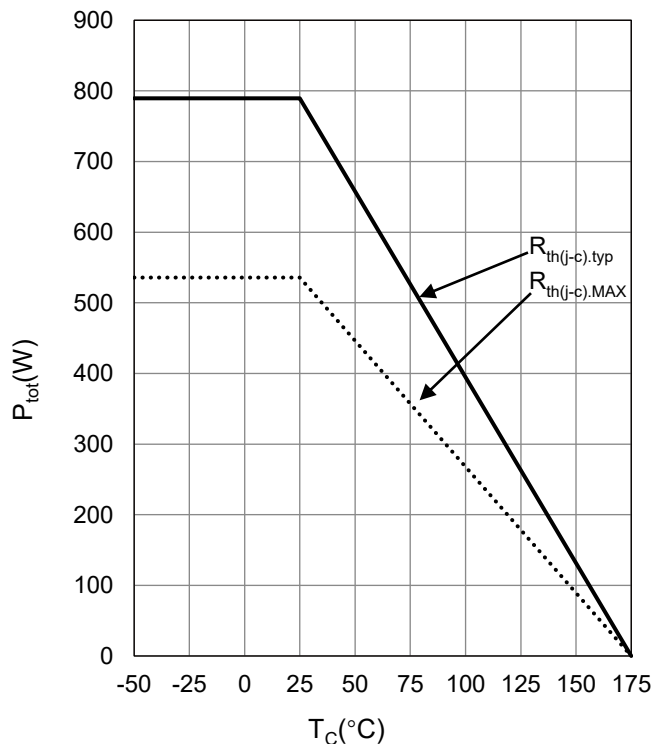


Current Derating vs. Temperature/峰值电流限值与壳温函数

$$I_{\text{Fpeak}}=f(T_c);$$

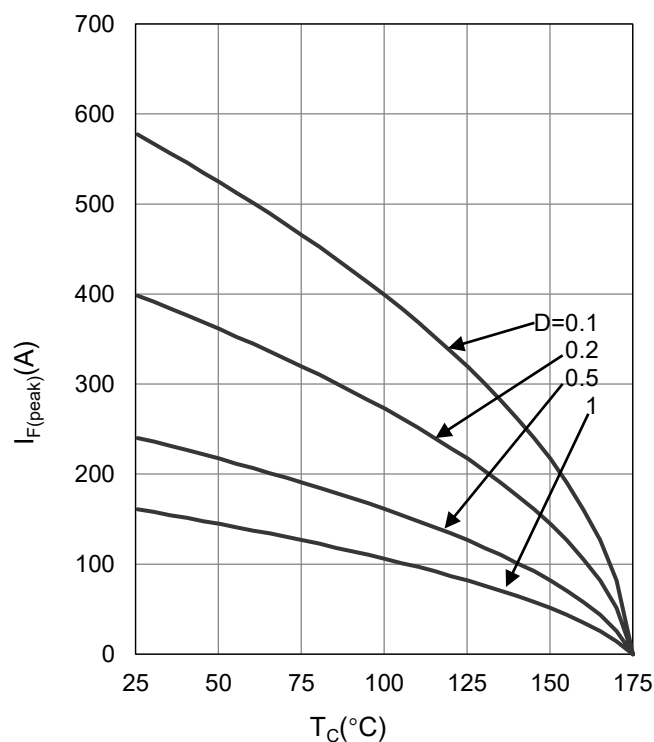


Typ.Recovered Charge vs. T_{vj} /反向恢复电荷与结温函数

$$Q_r=f(T_{vj}); V_R=400V, I_F=80A$$

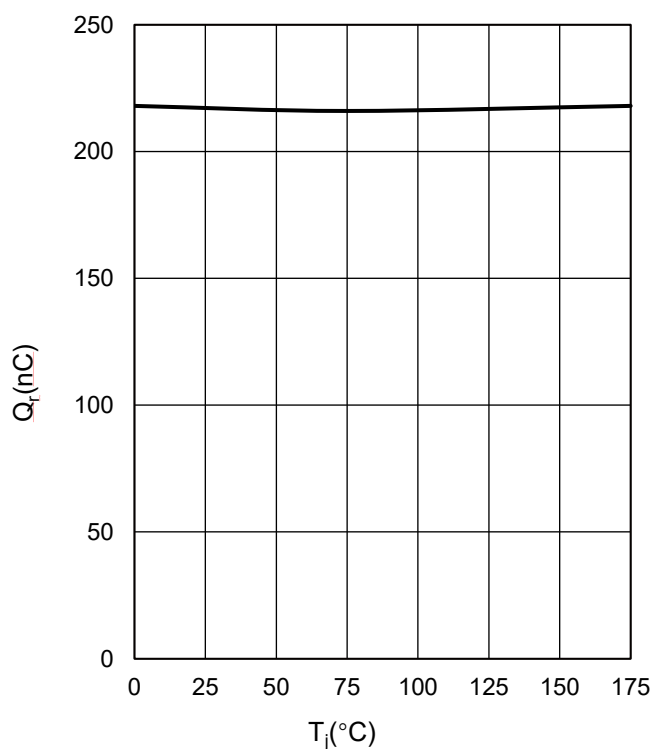

Typ.Reverse current of voltage /典型漏电与电压函数

$$I_R=f(V_R);$$

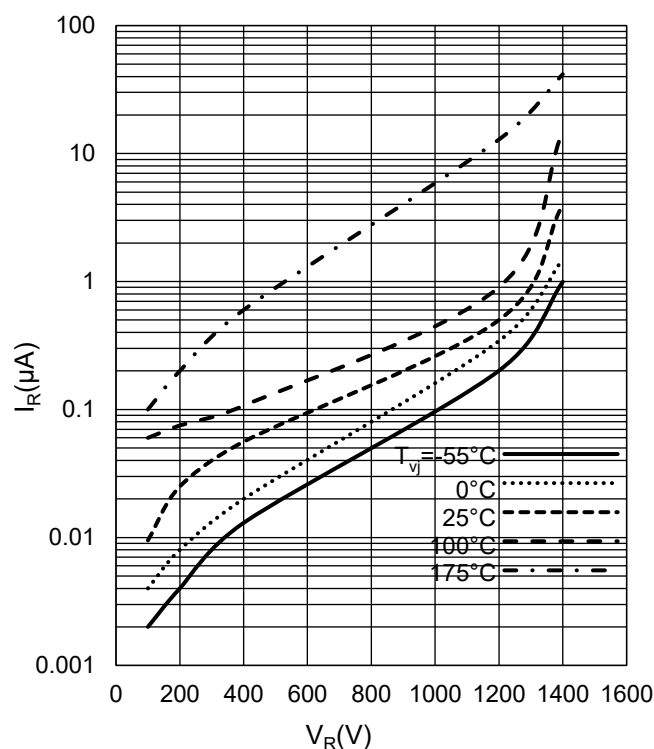


HD080N140A4R

1400V-80A Silicon Carbide Schottky Diode




Typ.Forward characteristics/典型正向特性

$I_F=f(V_F)$;

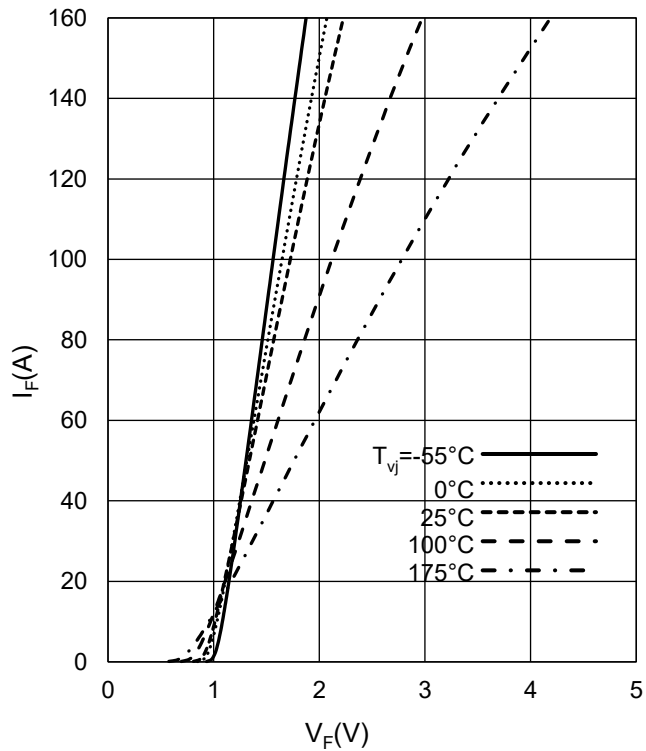


Typ.Capacitance characteristics/典型电容特性

$C=f(V_R)$; $T_{vj}=25^{\circ}\text{C}$, $f=1\text{MHz}$

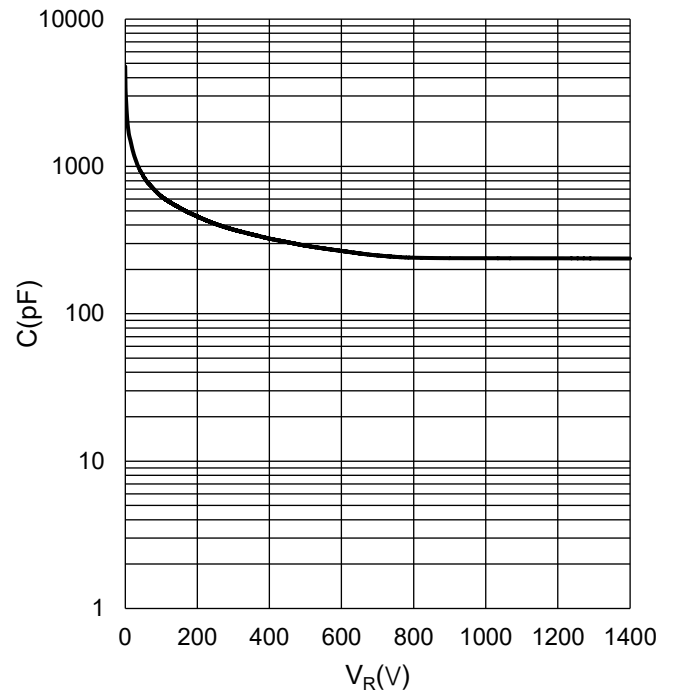

Typ.Capacitively stored energy vs V_R /典型电容储能特性


$C=f(V_R)$; $T_{vj}=25^{\circ}\text{C}$, $f=1\text{MHz}$

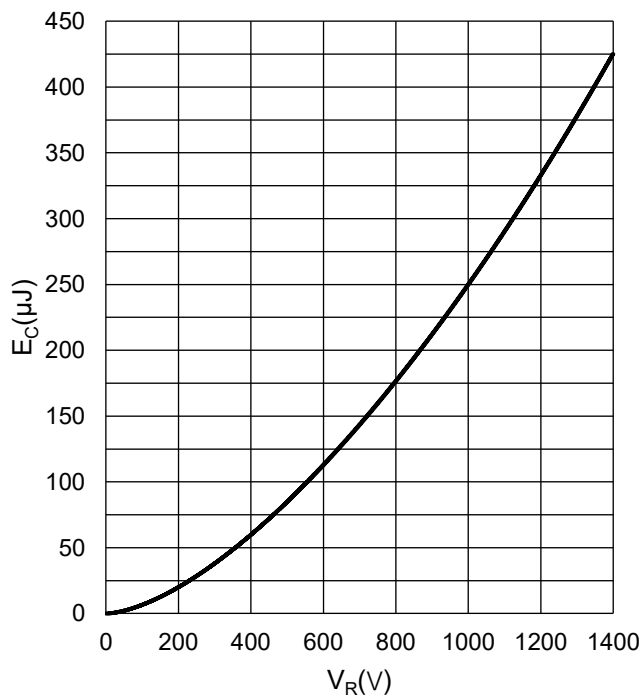



5. Package outline
封装外形

Figure 1. Outline TO-247-2L, dimensions in mm/TO-247-2L外形尺寸（毫米）

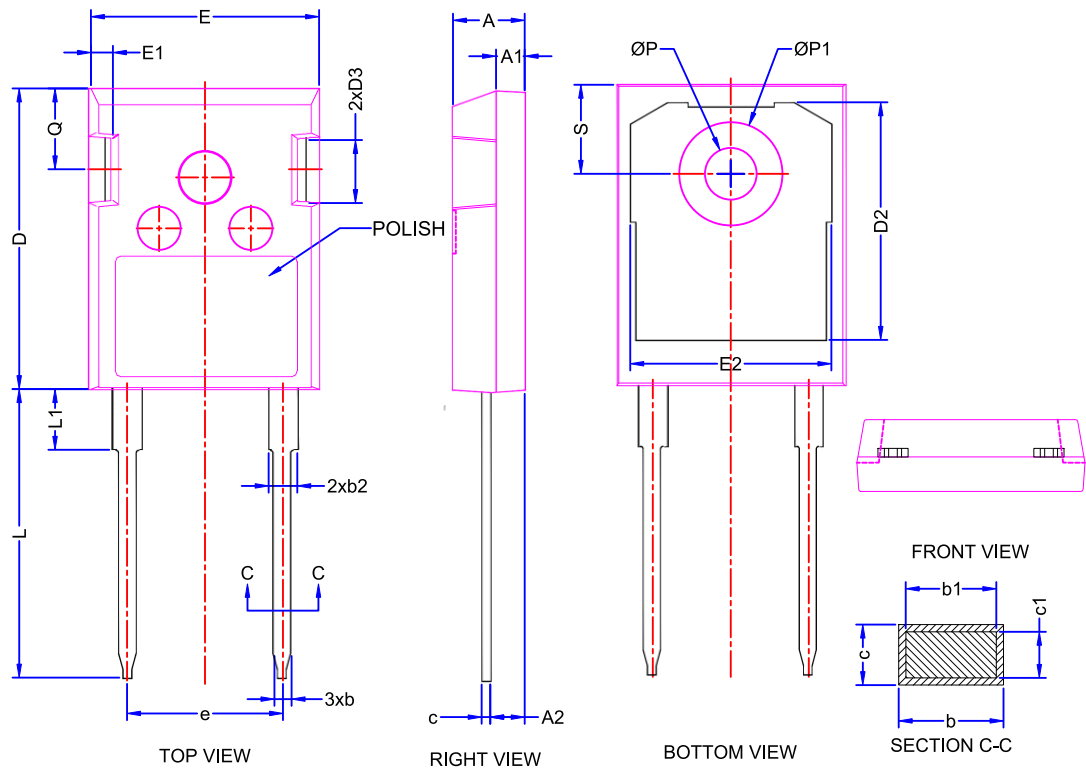

SYMBOL	DIMENSIONS			SYMBOL	DIMENSIONS		
	MIN.	NOM.	MAX.		MIN.	NOM.	MAX.
A	4.90	5.00	5.10	E	15.80	15.90	16.00
A1	1.94	2.04	2.14	E1	1.43	1.53	1.63
A2	2.30	2.40	2.50	E2	13.82	14.02	14.22
b	1.14	1.24	1.34	e	10.871 BSC		
b1	1.10	1.20	1.30	L	19.90	20.10	20.30
b2	1.94	2.04	2.14	L1	4.02	4.22	4.42
c	0.55	0.65	0.75	ΦP	3.50	3.60	3.70
c1	0.50	0.60	0.70	ΦP1	7.19 REF		
D	20.85	20.95	21.05	Q	5.44	5.64	5.84
D1	1.02	1.22	1.40	S	6.04	6.20	6.30
D2	16.35	16.55	16.75				
D3	4.23	4.33	4.43				

- Note:
- Slot required, notch may be rounded;
 - Dimension D&E do not include mold flash, Mold flash shall not exceed 0.127mm per side. These dimensions are measured at the outermost extreme of the plastic body;
 - Thermal pad contour optional within dimension D2&E2.
 - Lead finish uncontrolled in L1;
 - ΦP to have a draft angle of 1.5°(REF.) to the top of the part with hole diameter of 3.91mm(REF >)

- 注:
- 槽为强制结构，缺口可做圆角处理；
 - D 及 E 尺寸不含模塑溢料，每侧模塑溢料最大不超过 0.127 毫米；上述尺寸以塑料本体的最外边缘为测量基准；
 - 散热焊盘的轮廓可在 D2 及 E2 尺寸范围内自由设计；
 - L1 区域内的引线镀层不做管控；
 - ΦP 对应的孔相对器件顶部的拔模角度为 1.5°（参考值），孔直径为 3.91 毫米（参考值 >）



6. Revision history

Table 5 Date and version number/日期与版本号

Date日期	Revision版本	Changes更改内容
2025-12-02	Rev.G1.0	Target Datasheet (目标规格书)

7. Matters needing attention

Appendix 1. Important Technical Guidance, Application Policy, and Copyright Notice/重要技术指南、应用规范与版权声明

[Data and Design Guidance]

The information provided herein, including typical values and application examples, serves as technical guidance only and should not be construed as a formal guarantee of product characteristics. This documentation is intended for qualified engineering personnel, who bear the ultimate responsibility for evaluating the product's suitability for their specific application and compliance with all industry standards.

[Copyright and Revision Management]

We reserve all rights to the intellectual property contained within this document, and unauthorized reproduction is prohibited. For the sake of continuous improvement, the content is subject to change without prior notice. Designers are obligated to consult and use the latest revision of this datasheet to ensure optimal performance and accuracy in their final product.

[Application Safety and Intellectual Property]

Our product supply does not confer any license or right under any third-party intellectual property. Customers are fully responsible for the patent clearance and functional safety of their end application. Furthermore, this product is not intended for use in life-critical or high-risk systems (such as Class III medical devices or aerospace control) unless explicitly approved by us through a dedicated high-reliability agreement.

【数据与设计指引】

本文件中提供的所有信息，包括任何典型值和应用示例，仅作为技术指引，不应被视为对产品特性的正式保证。本资料专供具备资质的工程技术人员使用，客户的技术部门应对产品在特定应用中的适用性和对所有行业标准的符合性负最终评估责任。

【版权与版本管理】

本文件的所有知识产权和版权均归我方所有，严禁未经授权的复制与传播。为持续优化产品性能，本文件内容可能随时变更，恕不另行通知。设计人员有义务查阅并使用最新的版本数据手册，以确保设计准确性并实现最佳系统性能。

【应用安全与知识产权】

我方提供本产品，不应被视为授予任何第三方知识产权的许可或权利。客户应对其终端应用中的功能安全性、系统鲁棒性以及不侵犯任何第三方专利负全部责任。此外，本产品未被设计或认证用于生命维持或极高风险的关键系统。在将本产品用于此类高可靠性应用之前，客户必须设计充分的冗余和安全机制，并事先与我方签署专门的高可靠性供货协议。

<http://www.hmwsemi.com/>