

FEATURES

- | Low Cost
- | Diffused Junction
- | Low Forward Voltage Drop
- | Low Reverse Leakage Current
- | High Current Capability



DO-41

MECHANICAL DATA

- | Case : Jedec DO-41 Package
- | Polarity: Color Band Denotes Cathode
- | Mounting Position : Any

APPROVALS

RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

MAXIMUM RATINGS AND CHARACTERISTICS (T_A=25°C)

Parameter		Symbol	RL251	RL252	RL253	RL254	RL255	RL256	RL257	Unit
Marking			RL251	RL252	RL253	RL254	RL255	RL256	RL257	
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	
Maximum Average Forward Rectified Current at T _A =70°C		I _{F(AV)}	2.5							A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave		I _{FSM}	70							
Maximum Peak Forward Voltage at 2.5A DC		V _F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _J =25°C	I _R	5.0							μA
	T _J =100°C		50							
Typical Junction Capacitance (Note1)		C _J	25							pF
Typical Thermal Resistance (Note2)		R _{θJA}	30							°C/W
Operating Junction and Storage Temperature Rang		T _J , T _{STG}	-55~+125							°C

Note:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C
2. Thermal resistance junction of ambient.

CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

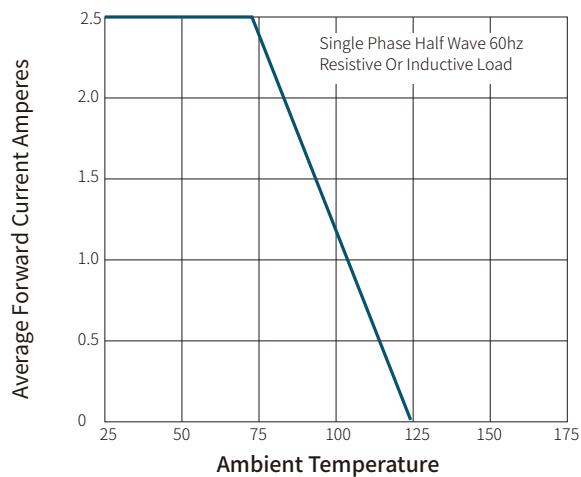


Fig.2 Maximum Non-repetitive Surge Current

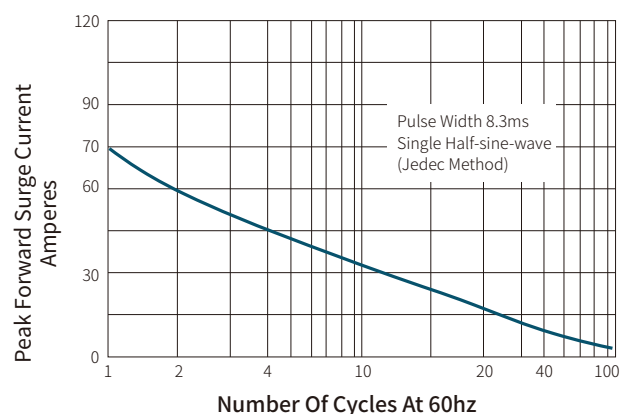


Fig.3 Typical Junction Capacitance



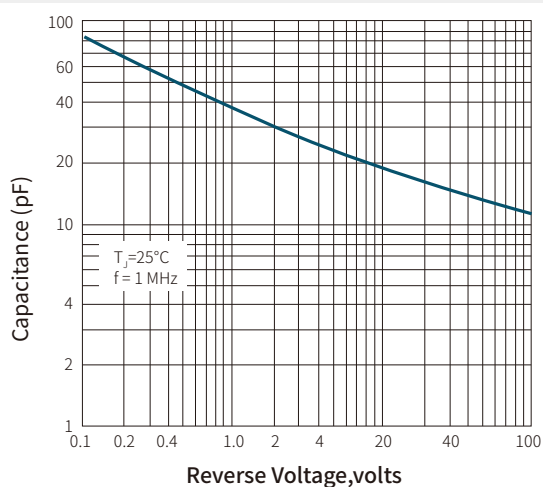


Fig.4 Typical Forward Characteristics

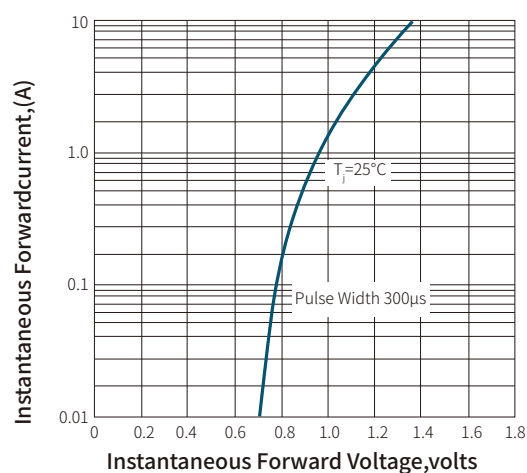


WAVE SOLDERING

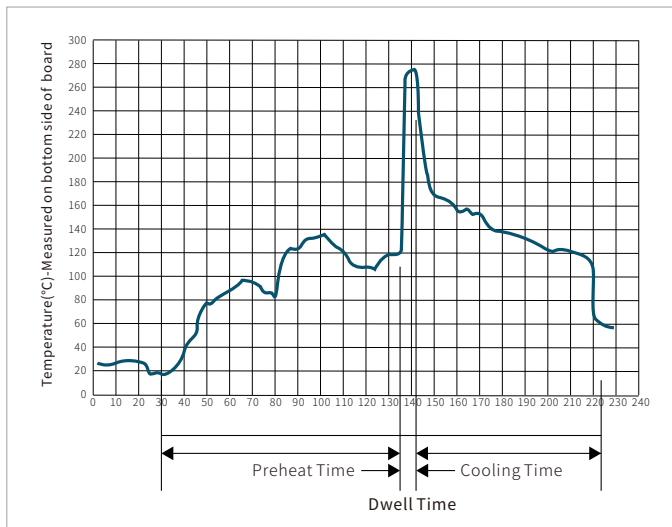

Wave Parameter		Lead-free assembly
Pre Heat	Temperature Min	100°C
	Temperature Max	150°C
	Time(min to max)	60 – 180 secs
Solder pot Temperature		280°C Max
Solder Dwell Time		2-5 seconds

DO-41 PACKAGE INFORMATION

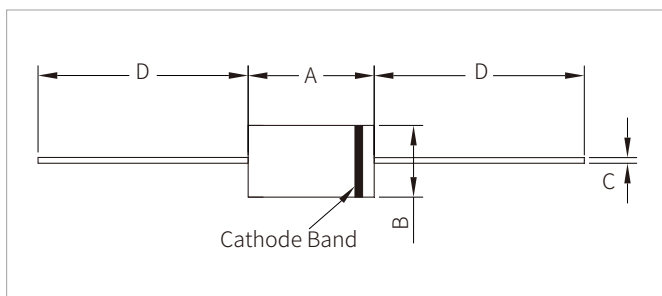

Ref.	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.10	5.20	0.160	0.205
B	2.00	2.70	0.080	0.107
C	0.71	0.86	0.028	0.034
D	25.40	-	1.000	-

ORDERING INFORMATION

Part Number	Component Package	Per Carton	Description
RL251-RL257	DO-41	5000pcs	Box

To find your local partner within Semiwell' s website : www.semiwell.com

© 2023 Semiwell Microelectronics Co.,Ltd.

The content of this document has been carefully checked and understood. However, neither Semiwell nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Semiwell does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Chinese law and resulting disputes shall be settled by the courts at the place of business of Semiwell. Latest publications and a complete disclaimer can be downloaded from the Semiwell website. All trademarks recognized.