



REV.	ECN NO.	REVISED	DATE

- 1.MATERIAL:
a.HOUSING:LCP UL94 V-0 WHITE
b.CONTACT:C5191
(SURFACE PLATING:CuSn-Plating)
SEE ORDERING INFORMATION
- 2.ELECTRIC:
a.CONTACT RESISTANCE: 50 MILLIOHMS MAX
b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE MINUTE
d.OPERATING TEMPERATURE: -25°C~ +85°C
- 3.PACKAGING: TAPE OR REEL

ORDERING INFORMATION

BS-12-B4AB025

电池座系列

BS-12系列

SMT 180° TYPE




PLATING:
B-CuSn-Plating

MATERIAL:
4A-LCP WHITE



工程部

2025-10-23

H. WANG

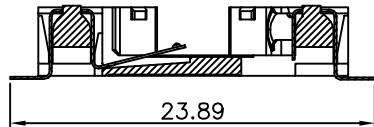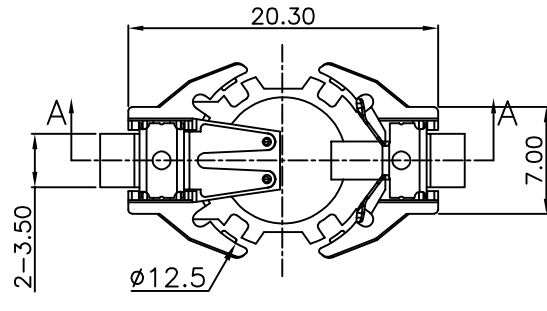

A-A SECTION

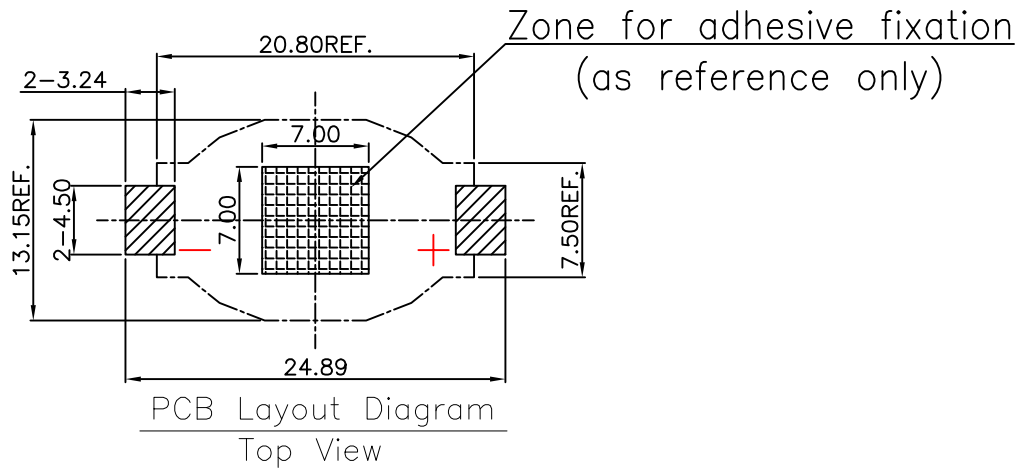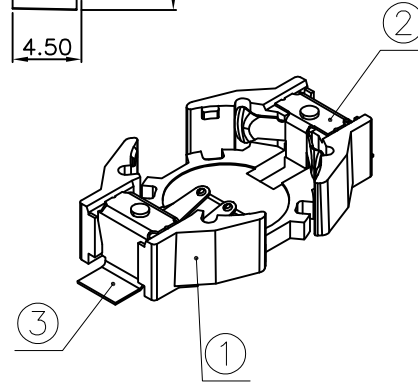


3	TERMINAL(-)	1	C5191 T=0.15mm	CuSn-Plating
2	TERMINAL(+)	1	C5191 T=0.15mm	CuSn-Plating
1	HOUSING	1	LCP UL94 V-0	WHITE
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com									
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10		ANGLES: X :±1° X.X :±0.5°		DSND	WangHeng		DATE	2025-10-23		TITLE: BS-1225-4 CuSn SMT LCP 白色	
A-PD		CHKD		LinAnzuo		DATE		2025-10-23		PART NO.: BS-12-B4AB025	
		APVD		XueShunyong		DATE		2025-10-23		DRAW NO.:WD-CP-0526	
		SCALE: 1:1		SIZE: A4		VIEW: 					
SHEET 1 OF 2		UNIT: mm		REV.: A/0		OBJECT: MY					



product

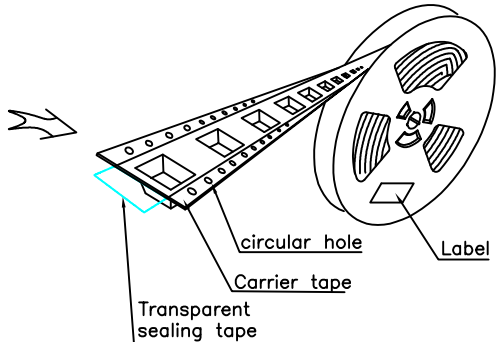


circular hole

Carrier tape


Label

Transparent sealing tape




Label up


6disc




plastic bag

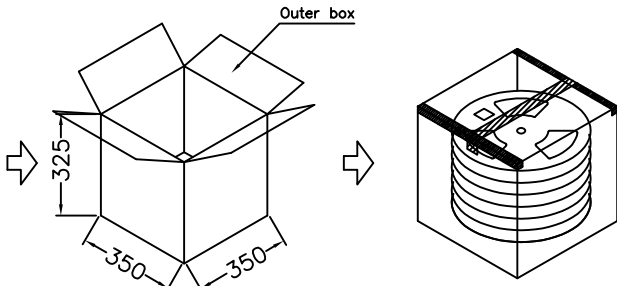

Outer box

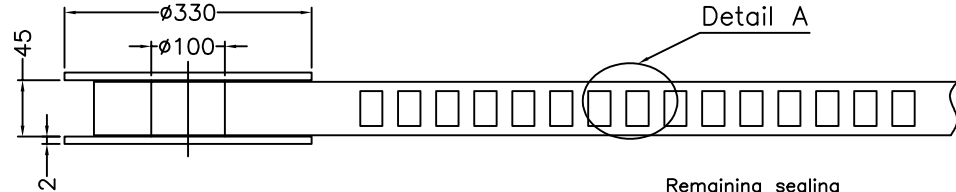


Detail A

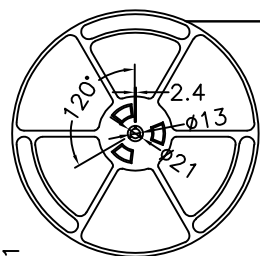

Discharge direction

Remaining sealing tape length: 400 MIN
Stripping direction
Stripping of carrier tape and sealing tape
Peel angle: 165°-180°
Peel strength: 0.1-1.0N


25 holes 500 products packaged in total 25 holes
End hole carrier tape Front end hole carrier tape

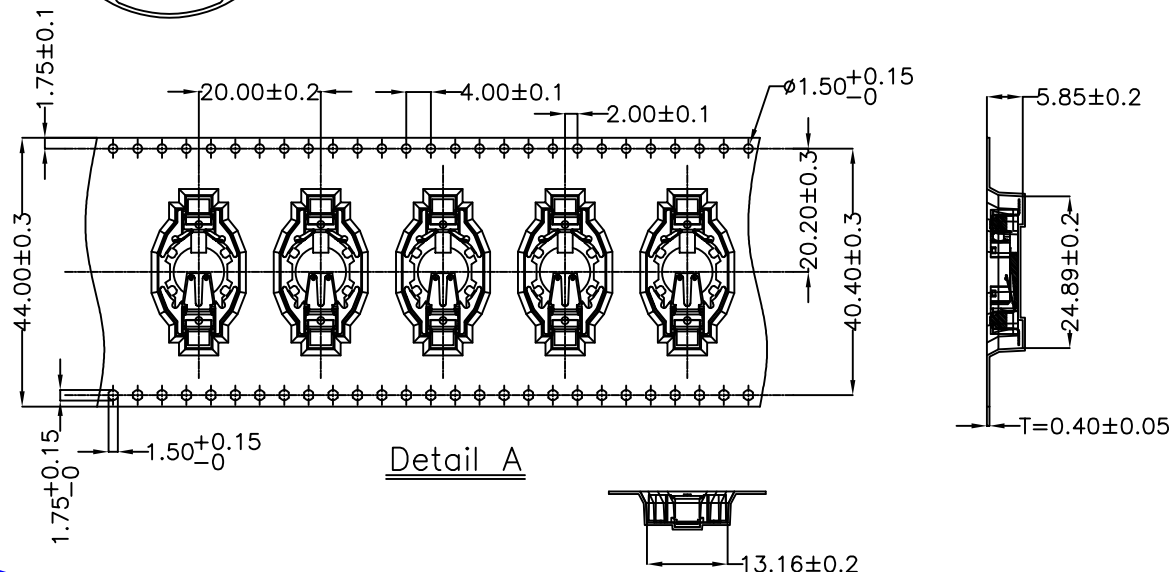

Detail A

Packaging information:

1. Each roll contains 500 products, with relevant labels attached to the outside of the roll;
2. Put every 6 rolls in a plastic bag;
3. Each outer box contains 6 plates, with a total of 3000 products;
4. Seal the top and bottom of the outer box with adhesive tape to form the character "工";
5. Battery holder packaging material BS-1225-4 SMT roll pack(BS-1225-4-01-R).



UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyoungdz.com									
DECIMALS:	ANGLES:	DSND		WangHeng		DATE		2025-10-30		TITLE:	
X : ±***	X : ±***	CHKD		ZhouRuicai		DATE		2025-10-30		BS-1225-4 CuSn SMT LCP白色 卷装	
X.X : ±***	X.X : ±***	APVD		XueShunYong		DATE		2025-10-30		PART NO.:	
X.XX : ±***	X.X : ±***	A-PD		SCALE:		SIZE: A4		VIEW: 		BS-12-B4AB025-R	
X.XXX : ±***		SHEET 2 OF 2		UNIT: mm		REV.: A/0		OBJECT: MY		DRAW NO.:MY-BD-0110	