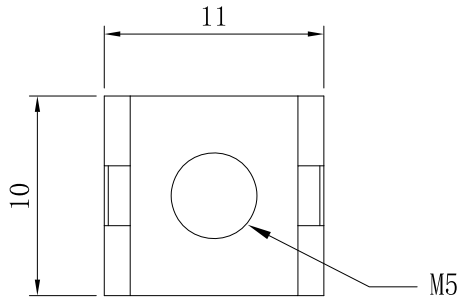


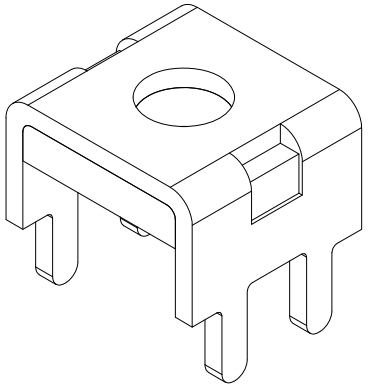

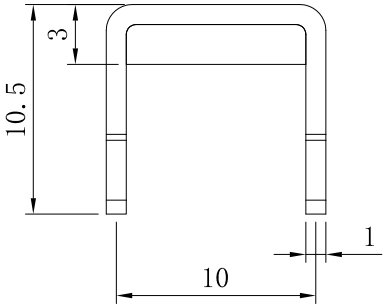







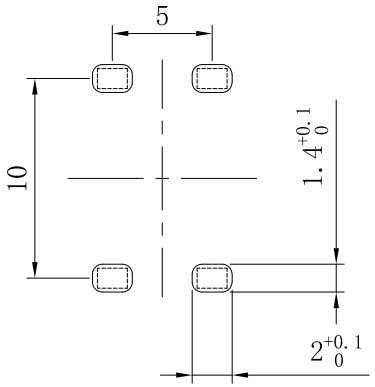


PCB 参考安装方式

NOTES:
备注

1. Brass or purple copper, tin-plating
   黄铜或紫铜，镀锡
2. Wire screw hole M5
   压线螺孔M5
3. Current Rating: 60A
   额定电流:60A
4. The maximum torque of the screw hole: 2.03 N/m
   螺孔最大扭力:2.03 N/m
5. Operating Temperature: -40℃~+125℃
   工作温度:-40℃~+125℃
6. Has passed the 72 hour salt spray test
   已通过72小时盐雾测试
7. There shall be no defects such as pin deformation and burrs.
   不得有脚变形，毛刺等缺陷
8. Unmarked dimensions refer to tolerances
   未标注的尺寸参考公差

| | | | GENERL TOLERANCE | 制 图 DRAWING | H C T L | 深圳市富港电子有限公司 | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | | DIM TOL | 审 核 CHECK | Z F C | | | | |
| | | | 5 or more ±0.35 | 批 准 APPROVAL | L P J | 产品名称 TITLE | PCB 焊接端子 厚度1.0 插板 铆垫片 M5 4焊脚 11x10x10.5mm | 版 本 REV. | A |
| | | | 2~5 ±0.25 | 比 例 SCALE | | | | | |
| 1 | 初版发行 | | 0~2 ±0.15 | | | 产品料号 PART NO. | FG-RG54-10-1110-DIP-C-01 | 单 位 UNITS | mm |
| 序号 No. | 变更内容 MODIFY CONTENT | 日 期 MODIFY DATE | Angle ±3.0° | 投 影 Projection | | 材 料 MATERIAL | | 页 次 SHEET | 1/1 |