


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
AO		NEW RELEASE	黄艳兰	2021-06-12

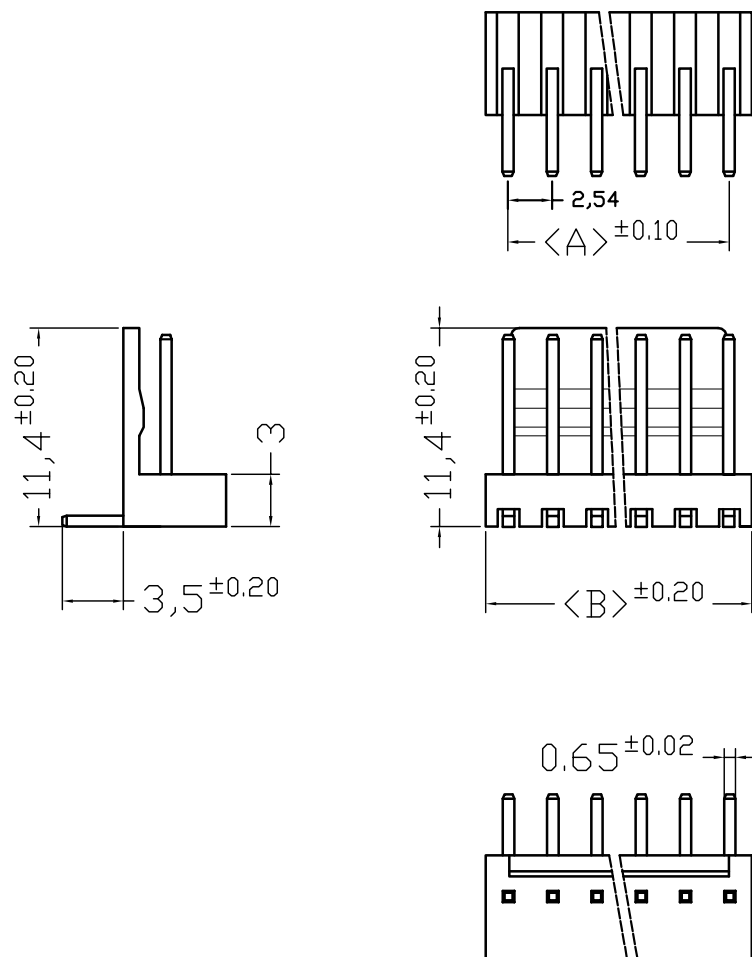

材质：
 塑胶：PA66
 PIN针：黄铜镀锡

线数 poles	编号 part no	尺寸 Dimensions(mm)	
		A	B
2	HDGC2543WR-2P-2	2.54	5.08
3	HDGC2543WR-3P-2	5.08	7.62
4	HDGC2543WR-4P-2	7.62	10.16
5	HDGC2543WR-5P-2	10.16	12.70
6	HDGC2543WR-6P-2	12.70	15.24
7	HDGC2543WR-7P-2	15.24	17.78
8	HDGC2543WR-8P-2	17.78	20.32
9	HDGC2543WR-9P-2	20.32	22.86
10	HDGC2543WR-10P-2	22.86	25.40
11	HDGC2543WR-11P-2	25.40	27.94
12	HDGC2543WR-12P-2	27.94	30.48
13	HDGC2543WR-13P-2	30.48	33.02
14	HDGC2543WR-14P-2	33.02	35.56
15	HDGC2543WR-15P-2	35.56	38.10
16	HDGC2543WR-16P-2	38.10	40.64

技术要求

1. 温度范围 (Temperature range): $-25^{\circ}C \sim +85^{\circ}C$
2. 额定电压 (Voltage rating): 250V. Ac/Dc
3. 额定电流 (Current rating): 3A
4. 接触电阻 (Contact resistance): $\leq 0.02 \Omega$
5. 绝缘电阻 (Insulation resistance) $\geq 1000M \Omega$
6. 耐压 (Withstand voltage): 1000V. AC/1分钟 (Minute)



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co., LTD
 TEL : 0755-27111216 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 产品名称: 2510弯针			
X.X	± 0.30	X.X°	$\pm 3^{\circ}$	APPD: 核准: 谢亮	PART NO: 产品编号: HDGC2543WR-XP-2				
X.XX	± 0.30	X.XX°	$\pm 2^{\circ}$	CHECK: 校对: 王建业	DATE	SCALE	UNIT	CODE NUMBER	
X.XXX	± 0.10	X.XXX°	$\pm 1^{\circ}$	DRAW: 绘图: 黄艳兰	2021-06-12	1:1	mm	A126	