REV.	DESCRIPTION	ECN NO.	NAME	DATE

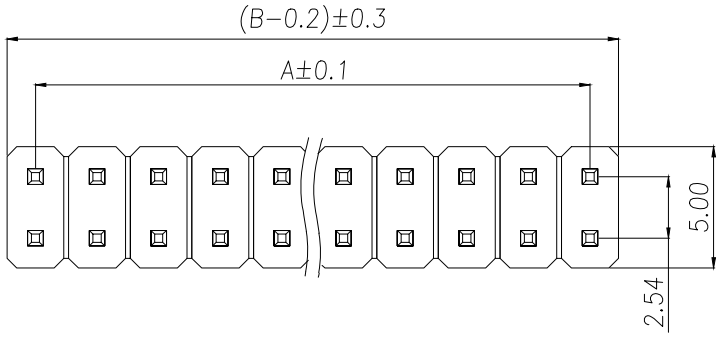

SPECIFICATIONS
Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20MΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: −40° to+105°
Contact Material: Copper Alloy
Standard: PA6T
Insrlator Material: Polyester(UL 94V−0)
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for30−60seconds
(260°C for5seconds)

P/N	PIN	DIM.A	DIM.B
AZ−PZ2.54−V11−2*1P	2*1	0.00	2.54
AZ−PZ2.54−V11−2*2P	2*2	2.54	5.08
AZ−PZ2.54−V11−2*3P	2*3	5.08	7.62
AZ−PZ2.54−V11−2*4P	2*4	7.62	10.16
AZ−PZ2.54−V11−2*5P	2*5	10.16	12.70
AZ−PZ2.54−V11−2*6P	2*6	12.70	15.24
AZ−PZ2.54−V11−2*7P	2*7	15.24	17.78
AZ−PZ2.54−V11−2*8P	2*8	17.78	20.32
AZ−PZ2.54−V11−2*9P	2*9	20.32	22.86
.....	.....	.....	.....
AZ−PZ2.54−V11−2*40P	2*40	(PIN−1)X2.54	(PIN)X2.54

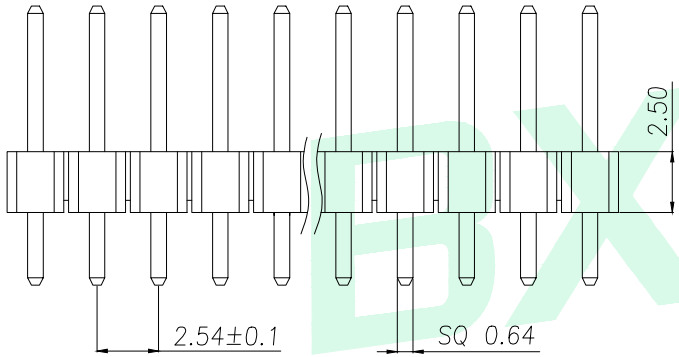

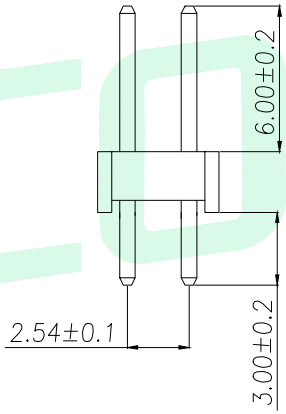

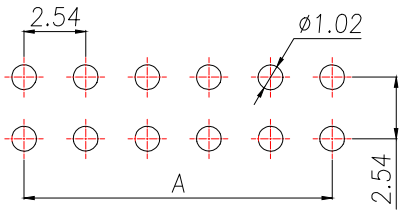

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

GENERAL TOLERANCE						
DIM. TOL. x. ±0.30 x.x ±0.20 x.xx ±0.10 GENERAL ANGLE: x.° ±5° x.x° ±1° x.xx° ±0.5°	DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD					BXCONN®
	TITLE: 2.54PH H2.5 2xNPin 180度 PC3.0 PA6.0 PB2.5 L11.5 6T					
	DWG. NO.: AZ−PZ2.54−V11−2*NP				CHECKED: MAX	
	PART NO.: AZ−PZ2.54−V11−2*NP				DRAWN: ELLA	
	UNIT: mm	SCALE: none	SHEET: 1of 1	DWG. SIZE: A4	LAYER: bxconn	APPROVED: WILL