
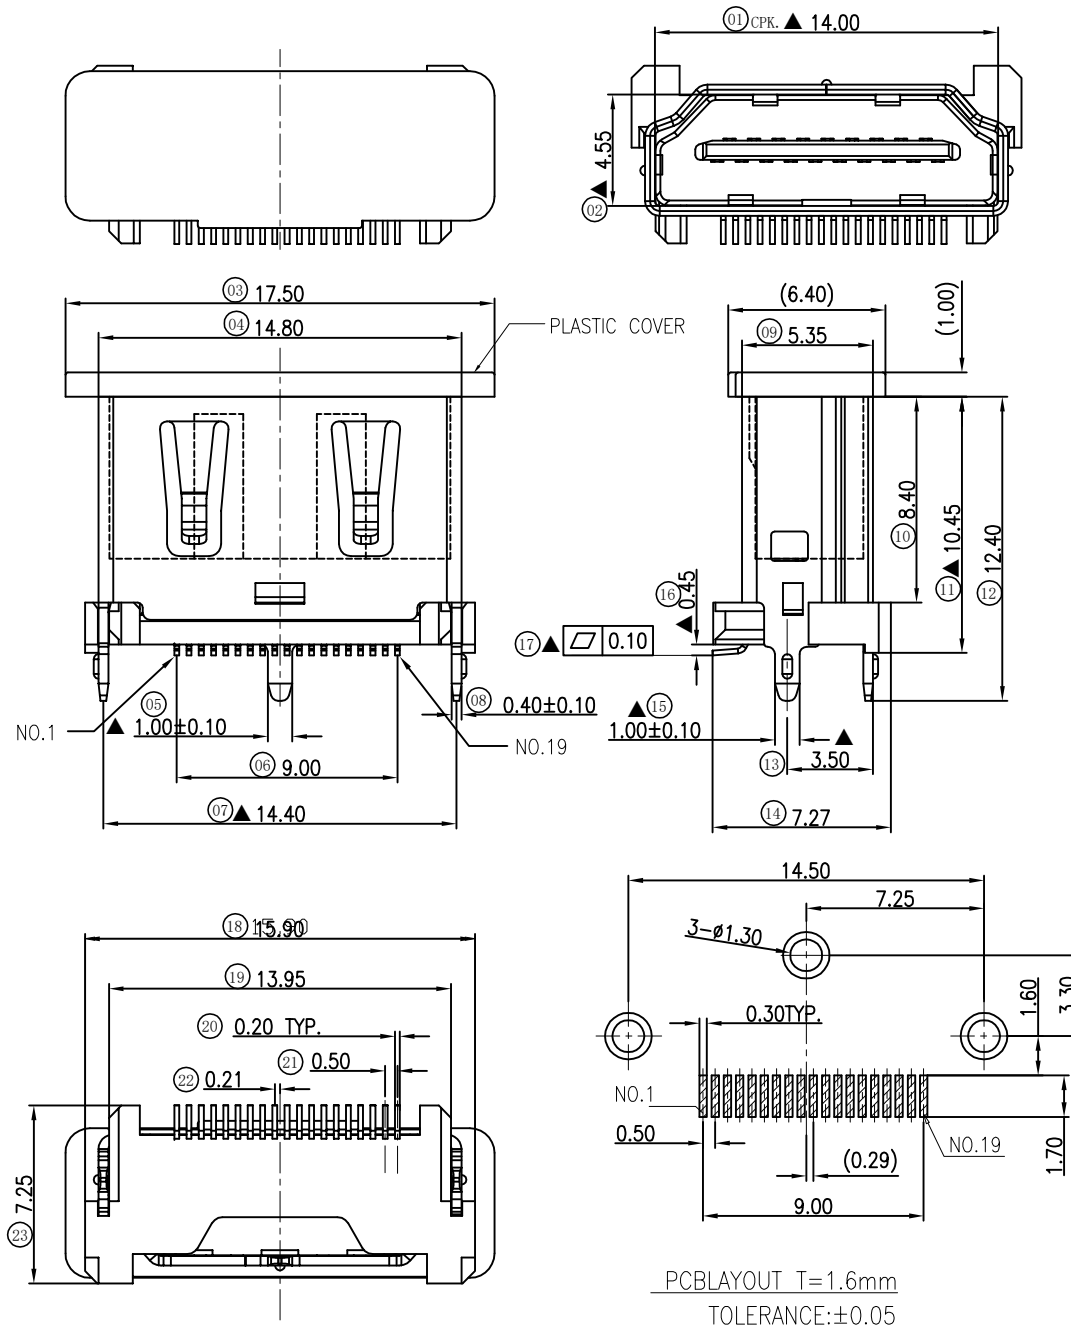


修 订	标 记	修 改 描 要	签 名	日 期
REV A0		NEW DWG		2016-03-12

NOTE:

- 1.MATERIALS AND FINISHED
INSULATOR : LCP UL-94V0,
COVER:LCP UL-94V0
SHELL : C2680, NI FINISHED
CONTACT MATERIAL :C5191 GOLD FINISHED
- 2.ELECTRICAL CHARACTERISTICS
CONTACT CURRENT RATING : 0.5 AMPS
CONTACT RESISTANCE :20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.
INSULATION RESISTANCE : 100 MEGAOHMS MIN.
- 3.MECHANICAL
MATING FORCE:4.5Kgf MAX.
UNMATING FORCE:1.0 Kgf MIN
- 4.ENVIRONMENTAL
TEMPERATURE RATING : -55°C ~ +105°C

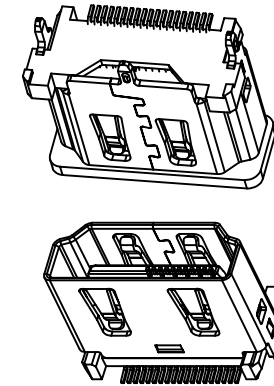

		深圳市华德共创科技有限公司 Shenzhen Huade co-create Technology Co.,LTD 电话：0755-27111216 传真：0755-29940187			
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表			TITLE: HDMI 立式母座10.5高 铜壳 产品名称: 镀镍黑胶		
X.X ±0.30	X.X* ±3°	APPD: 核准:	PART NO: 产品编号: HDMI-GD-117PWB		
X.XX ±0.20	X.XX* ±2°	CHECK: 校对: 王建业	DATE	SCALE	UNIT
X.XXX ±0.10	X.XXX* ±1°	DRAW: 绘图: 黄艳兰	2016-03-12	1:1	mm
					CODE NUMBER A001