

SIC SCHOTTKY BARRIER DIODE

Reverse Voltage - 650 V

Forward Current - 8 A

FEATURES


- ◆650-Volt SiC JBS Rectifier
- ◆Zero Reverse Recovery
- ◆Positive Temperature Coefficient on VF
- ◆Temperature-Independent Switching Behavior
- ◆Extremely Fast Switching
- ◆Extremely Low Leakage Current

APPLICATIONS

- ◆Uninterruptible power supply
- ◆Switch mode power supply
- ◆Power factor correction
- ◆Solar inverter

BENEFITS

- ◆High-speed switching
- ◆Low heat dissipation requirements
- ◆Reduced EMI
- ◆High-reliability

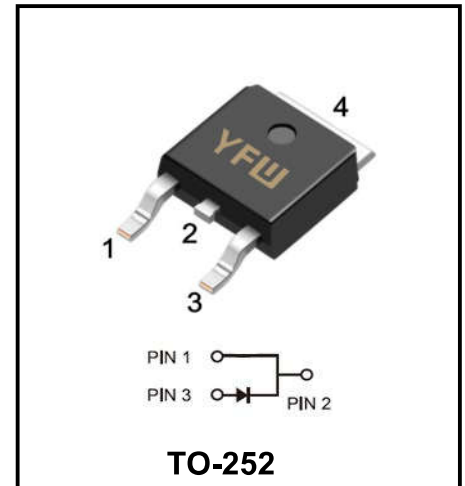

Maximum Ratings at Ta=25°C unless otherwise specified

Parameter	Test Conditions	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	T _C = 25°C	V _{RRM}	650	V
Continuous Forward Current for Rth(j- c,max)	T _C = 25°C	I _F	23	A
	T _C = 110°C		14	
	T _C = 150°C		8	
Non-Repetitive Forward Surge Current, Sine Half-Wave	T _C = 25°C, tp = 10ms	I _{FSM}	58	A
	T _C = 110°C, tp = 10ms		51	
Repetitive Forward Surge Current, Sine Half-Wave	T _C = 25°C, tp = 10ms	I _{FRM}	54	A
	T _C = 110°C, tp = 10ms		46	
Single Pulse Avalanche Energy	T _C = 25°C, L= 0.5mH, V _{DD} = 50V, I _{peak} =8A	E _{AS}	16	mJ
Operating Temperature Range	-	T _J	175	°C
Storage Temperature Range	-	T _{STG}	-55 to +175	°C
Typical Thermal Resistance	-	R _{θJC}	1.68	°C/W

Electrical Characteristics unless otherwise specified

Parameter		Symbol	Value			Unit
Forward Voltage Drop			Min.	Typ.	Max.	
I _R = 100μA		V _{bc}	650	-	-	V
at I _F =8A	T _A =25°C	V _F	-	1.38	1.7	V
	T _A =175°C		-	1.7	-	
Maximum Reverse Current at V _R =650V	T _A =25°C	I _R	-	1	30	μA
	T _A =175°C		-	8	-	
Total capacitive charge	V _R = 400V	Q _c	-	23	-	nC
Total capacitance	V _R = 1V, f = 1MHz	C	-	312	-	pF
	V _R = 200V, f = 1MHz		-	45	-	
	V _R = 400V, f = 1MHz		-	33	-	
Capacitance stored energy	V _R = 400V	E _c	-	3.4	-	μJ

Pulse test: 300 μs pulse width, 1 % duty cycle

RATINGS AND CHARACTERISTIC CURVES

Figure 1. V_F Typical Forward Characteristics

$I_F = 0 \sim 16A$

T_{vj} ranges from $-55^\circ C$ to $175^\circ C$

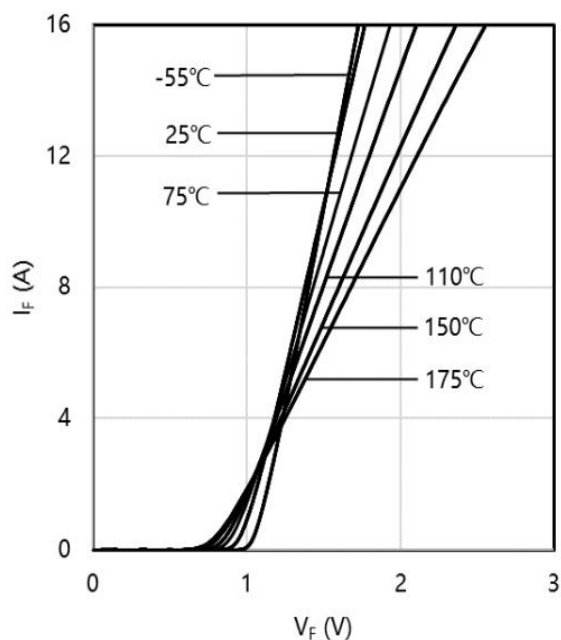


Figure 2. I_R Typical Reverse Characteristics

$V_R = 300 \sim 700 V$

T_{vj} ranges from $25^\circ C$ to $175^\circ C$

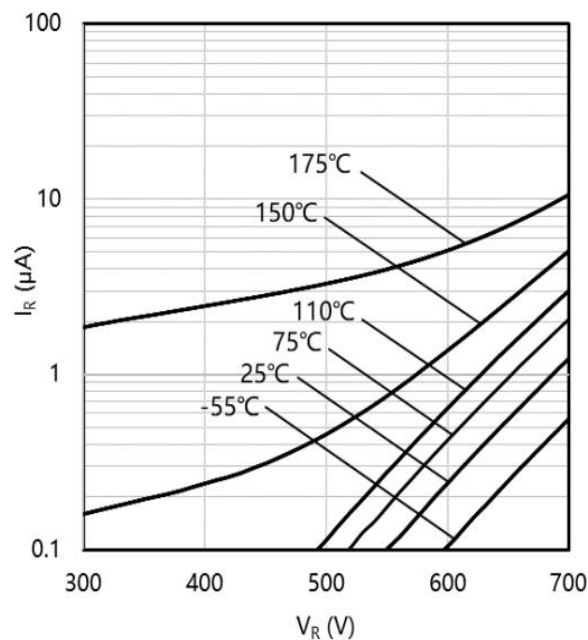


Figure 3. Total Capacitance Charge Characteristics

$V_R = 0 \sim 650 V$

$T_{vj} = 25^\circ C$


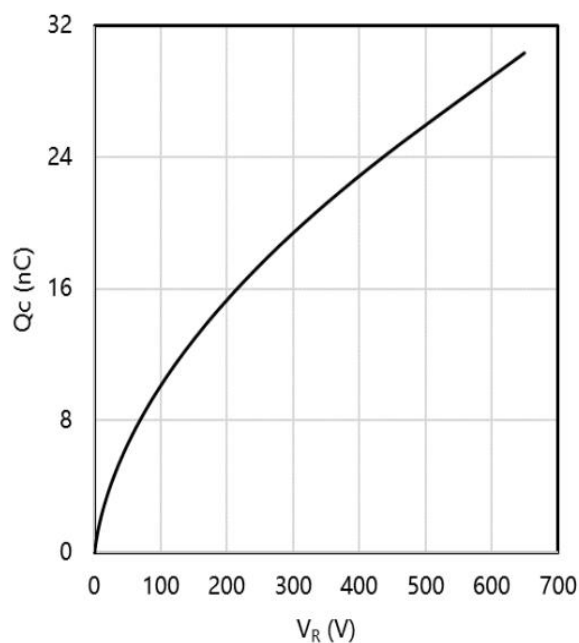


Figure 4. Total Capacitance Characteristics

$V_R = 0 \sim 650 V$

$T_{vj} = 25^\circ C$

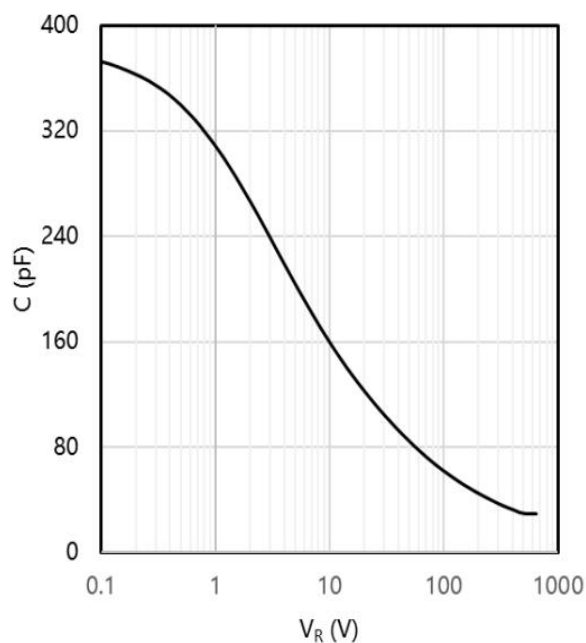

RATINGS AND CHARACTERISTIC CURVES

Figure 5. Power dissipation as function of case temperature

T_{vj} ranges from 25 °C to 175 °C

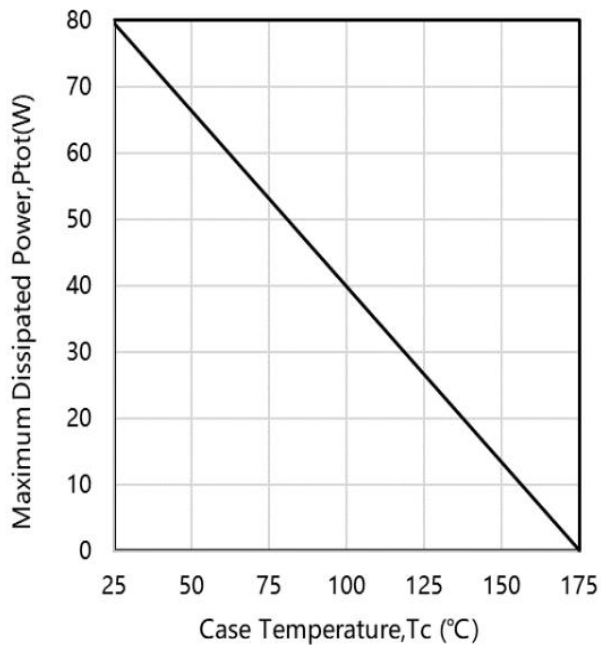


Figure 6. Capacitance Stored Energy

$V_R = 0 \sim 650$ V

$T_{vj} = 25$ °C



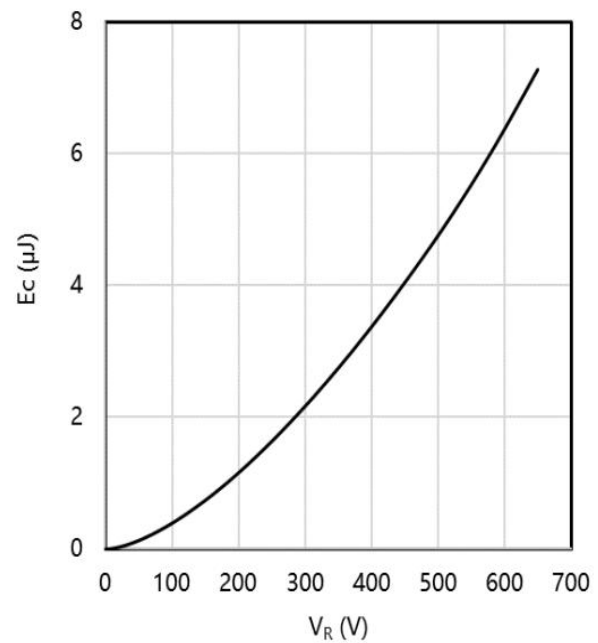


Figure 7. Max. transient thermal impedance, $Z_{th,j-c}=f(t_p)$, parameter: $D=t_p/T$

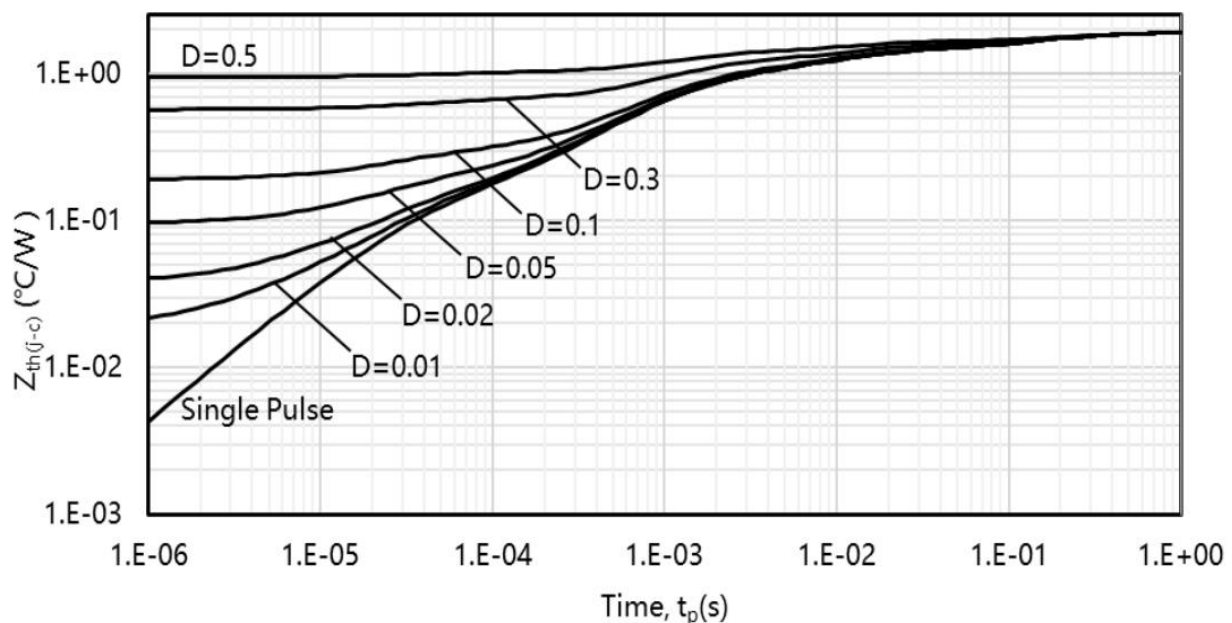

Marking Diagram

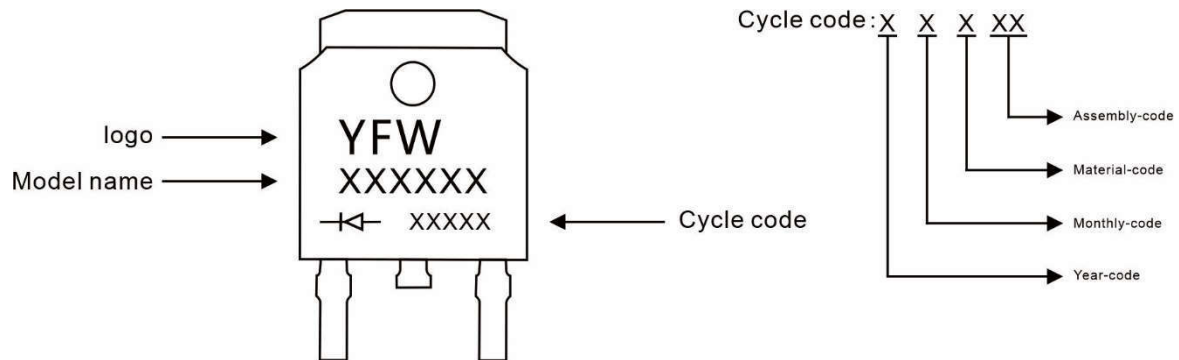

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
YFWD308065CS	TO-252	0.011oz(0.32g)	2500pcs/reel	5000pcs/box 25000pcs/Carton

Package Dimensions

TO-252

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	2.20	2.50	0.087	0.098
A1	0.00	0.12	0.000	0.005
A2	2.20	2.40	0.087	0.094
B	1.20	1.60	0.047	0.063
b	0.50	0.70	0.020	0.028
b1	0.70	0.90	0.028	0.035
c	0.40	0.60	0.016	0.024
c1	0.40	0.60	0.016	0.024
D	6.35	6.65	0.250	0.262
D1	5.20	5.40	0.205	0.213
E	5.40	5.70	0.213	0.224
e	2.20	2.40	0.087	0.094
e1	4.40	4.80	0.173	0.189
L	10.00	11.00	0.393	0.433
L1	2.70	3.10	0.106	0.122
L2	1.40	1.80	0.055	0.071
L3	0.90	1.50	0.035	0.059

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.