


MSX-360

Miniature Joystick Position Sensor

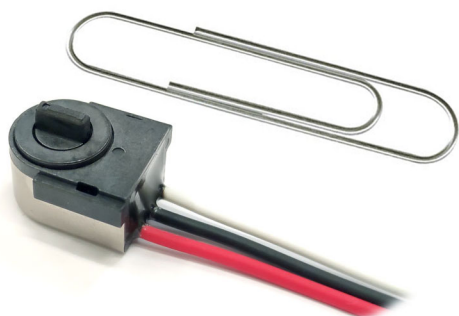

DESCRIPTION

This joystick sensor packs pro-grade features into a tiny footprint (14.4mm x 16mm). Despite its lightweight build, it delivers precise control with a full 360-degree range (no dead zones!), 12-bit resolution for smooth response, and long-lasting durability. Plus, it's built to resist electromagnetic interference and electrostatic discharge for reliable operation.

Low profile and long life cost-effective alternative to contacting solutions based in printed carbon tracks or potentiometers that are prone to wear and tear during their lifespan.

KEY FEATURES




True, contactless operation

Without any gears or mechanical interfaces the sensor is easily assembled and calibrated and subject to limited wear and tear over lifetime.




Fits in the smallest of spaces

With a ultra small weight and packaging space, this rotary sensor can be used in even the most space-constraint application.



Integrated shaft

The magnet is securely fastened to the shaft and acts as only moving component in the sensor.



360 degree absolute position feedback

Endless mechanical rotational angle without dead band, keeps the position on power loss with programmable electrical angles from 90 to 360 degrees.

POTENTIAL APPLICATIONS

- HMI interfaces
- Medical joysticks
- Industrial joysticks
- Radio remote control
- Throttle control
- Lever control arm
- Valve position

MSX-360

Miniature Joystick Position Sensor

MECHANICAL SPECIFICATIONS

Rotational life ¹	Up to 7,000,000 cycles
Mechanical range	360° (endless rotation)
Magnetic shielding	built-in
Shaft Diameter	5.9mm
Max. mounting torque	1Nm

¹ Higher rotational life upon request

ELECTRICAL SPECIFICATIONS

Linearity ^{1,2}	±1.5% absolute
Electrical angular range ¹	90°, 180°, 270°, 360°
Output protocol ¹	Analog (Ratiometric)
Output ³	Simple
Resolution	Up to 12 bit
Supply voltage ¹	5V ±10%
Supply current	Typ 12.6 mA
Voltage protection	+20V / -10V
Self-diagnostic features	yes

¹ Other specifications available

² Ferromagnetic materials close to the sensor (i.e. mounting surface) may affect the sensor's linearity.

³ If you need other output types please see the [MSC360](#) miniature position sensor.

ENVIRONMENTAL SPECIFICATIONS

Characteristic	Standard	Level
Operating and storage temperature ¹	n/a	-40° to +125°C
Shock	EN 60068-2-27	500 m/s ² , 11 ms, 3 axis 3 times (Room Temp.)
Vibration	EN 60068-2-6	200 m/s ² , 5 ~ 500 Hz 10 min, 3 axis 2 hours (Room Temp.)
Sealing	IEC 60529	IP67
EMS	ISO 11452-2, 3	100 V/m, 1 MHz ~ 1 GHz
ESD	IEC 61000-4-2	Contact discharge - case to each terminal: ±15kV Contact discharge - between each terminal: ±15kV

Check availability for other specifications

HOW TO ORDER (EXAMPLE: MSX360-1A-C004-ERA360-05K)

MSX360	-	1	A	-	C ____	-	ERA ____	-	05	K
Series		Type ¹	Output ²		Output function ³		Electric rotational angle ⁴		Voltage supply	Temperature range
		1 = simple	A = analog		C0004 = 360° C0022 = 90° C0250 = 180° C0304 = 270°		ERA090 ERA180 ERA270 ERA360		05 = 5V ±10%	K = -40°C to +125°C

¹ Redundant output: check the MSC360 miniature position sensor.

² The analog output is ratiometric, proportional to input supply voltage.

³ Other output functions available, please check availability.

 [check inventory](#)


Miniature Joystick Position Sensor

Page 3 of 4
Amphenol Sensors

MSX-360

Miniature Joystick Position Sensor


OUTPUT FUNCTIONS

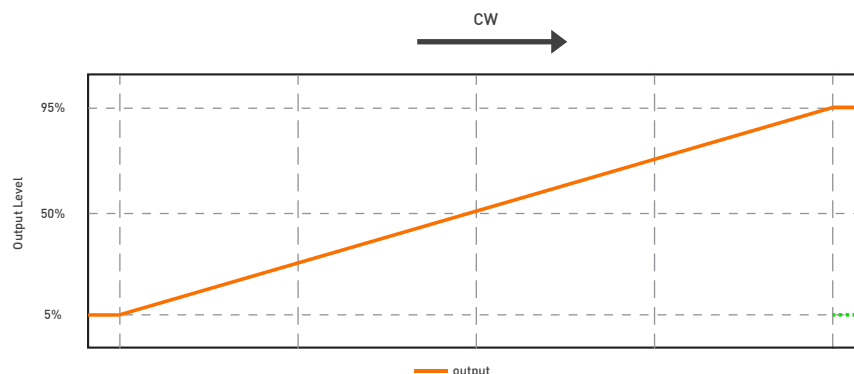


ERA	Mechanical Rotational Angle		
360 →	0°	180°	360°
270 →	45°	180°	315°
180 →	90°	180°	270°
090 →	135°	180°	225°

OUTPUT VOLTAGE DEPENDING ON SHAFT POSITION - EXAMPLES

MSX360-1A-C0004-ERA360-05K

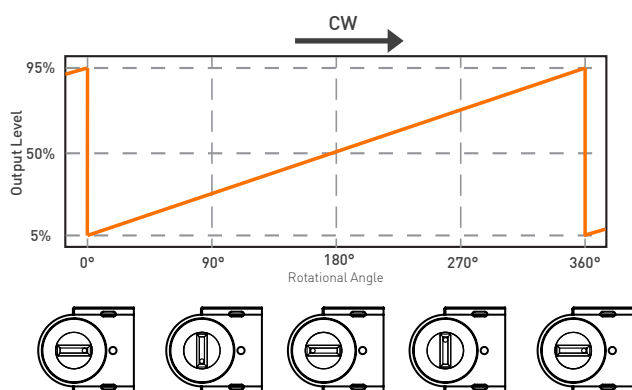

MSX360-1A-C0022-ERA090-05K

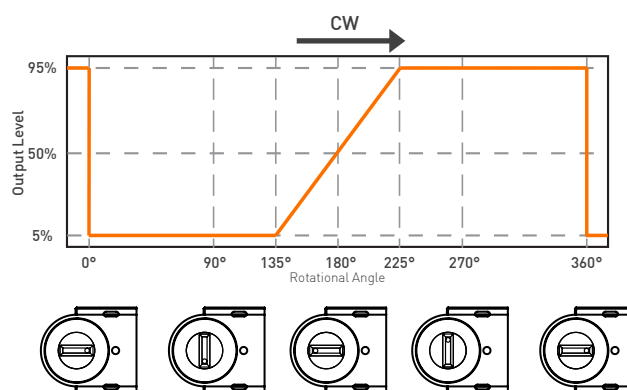

Custom output functions with positive and negative slopes on request. Ferromagnetic parts close to the sensor environment may modify the sensor performance. No external magnetic perturbations are considered on the application where the PIHER sensor is mounted. If so, the amplitude and direction or flux density generator type and characteristics (magnet, cable, motor...) must be notified to PIHER for a magnetic simulation analysis update.

Please always use the latest updated datasheets and 3D models published on our website.

Disclaimer:

The product information in this catalog is for reference purposes. Please consult for the most up to date and accurate design information.

Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Piher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein.

Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Piher's terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Piher products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorized Piher personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners. Information contained in and/or attached to this catalogue may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information, please contact the sender immediately. For any Piher Exports, Note: All products / technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

CONTACT

Piher Sensing Systems
Polígono Industrial Municipal
Vial T2, N°22
31500 Tudela, Spain

sales@piher.net

+34 948 820 450



NEED QUICK HELP?

Our AI Virtual Assistant is available
24/7 to provide instant support—
visit chat.piher.info now!

Rev-10072024 © Piher Sensors & Controls S.A.