


EGBU1506

Single Phase 15.0Amp Glass
passivated Bridge Rectifiers

Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Idea for printed circuit board
- Glass passivated Junction chip
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed 250°C/10 seconds at terminals
- The G suffix is uses for photoresist chip, otherwise it is a knife scraping chip

Mechanical Data

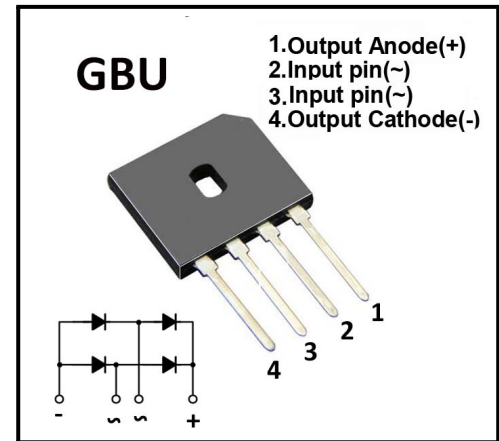

MECHANICAL DATA

- Case: Molded plastic body
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Polarity symbol marking on body
- Mounting Position: Any

Maximum Ratings And Electrical Characteristics (@T_A=25°C unless otherwise noted)

Symbol	Parameter	EGBU1506	Unit
V _{RRM}	repetitive peak reverse voltage	600	V
V _{RMS}	RMS voltage	420	V
V _{DC}	DC blocking voltage	600	V
I _{AV}	Maximum average forward rectified current with heatsink	15.0	A
I _{FSM}	Peak forward surge current, 8.3ms single half sine-wave	250.0	A
I _t ²	I _t ² Rating for fusing (t=8.3ms, T _A =25°C)	259.375	A ² _S
V _F	Forward Voltage at 7.5A	1.7	V
I _R	Peak Reverse Current@T _A =25°C at rated DC blocking voltage @T _A =125°C	5.0 500	uA
T _{rr}	Maximum reverse recovery time (Note1)	50	ns
R _{qJA}	Typical thermal resistance	31.0	°C/W
T _J	Operation Temperature Range	-55 to +150	°C
T _{STG}	Storage Temperature Range	-55 to +150	

Note:(1)Reverse recovery test conditions: IF=0.5A,IR=1.0A,IRR=0.25A

(2)Mounted on glass epoxy PC board with 1.3mm² solder pad.

(3) Device mounted on 50mm x 50mm x 1.6mm Cu Plate Heatsink.

**BORN SEMICONDUCTOR, INC. ALL
RIGHT RESERVED**

Specifications are subject to change without notice.

Please refer to <http://www.born-tw.com> for current information.

Revision: 2022-Jan-1



Ratings And Characteristic Curves

Figure 1: DERATING CURVE OUTPUT RECTIFIED CUR-

RENT

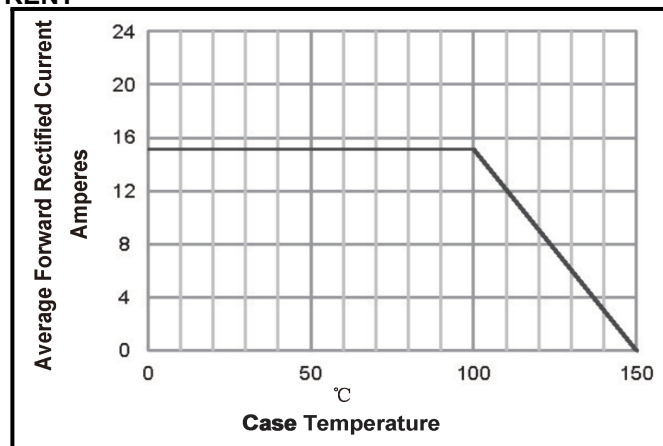


Figure 2: MAXIMUM NON-REPETITIVE PEAK FOR-

WARD SURGE CURRENT PERLEG

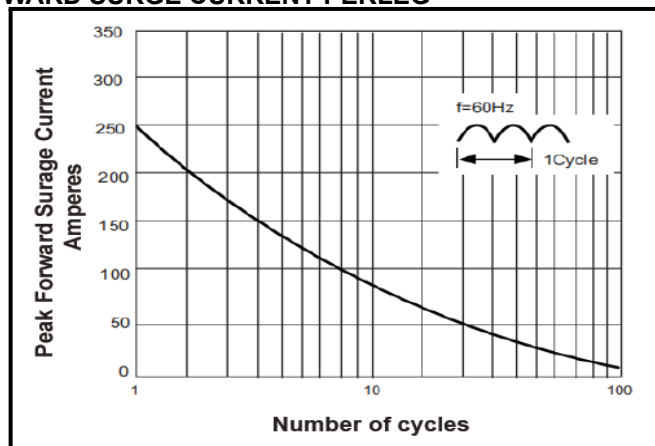


Figure 3: TYPICAL FORWARD VOLTAGE CHARACTER-

ISTICS


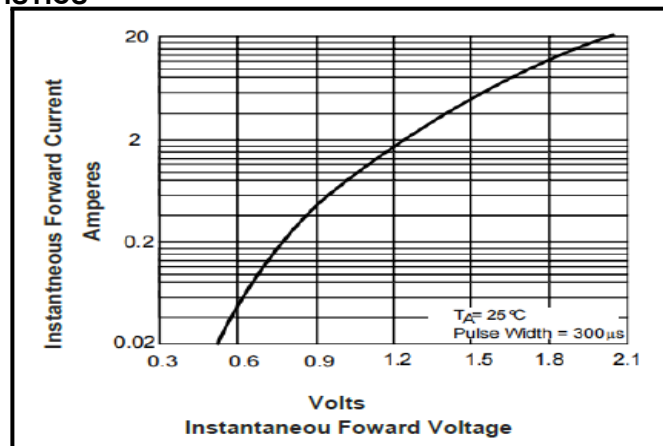


Figure 4: TYPICAL REVERSE LEAKAGE CHARACTER-


ISTICS

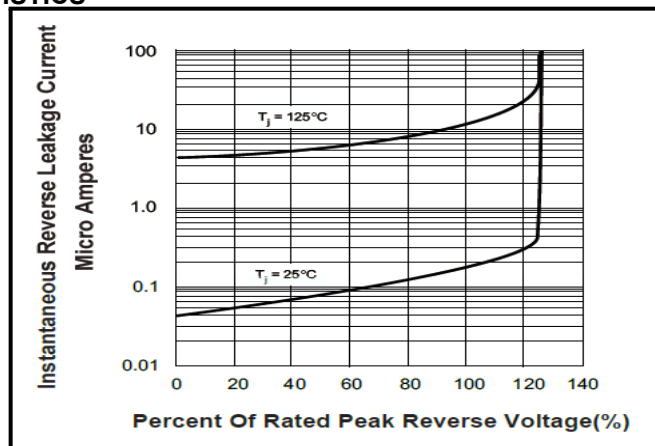

EGBU1506

Single Phase 15.0Amp Glass
passivated Bridge Rectifiers

Outline Drawing -GBU

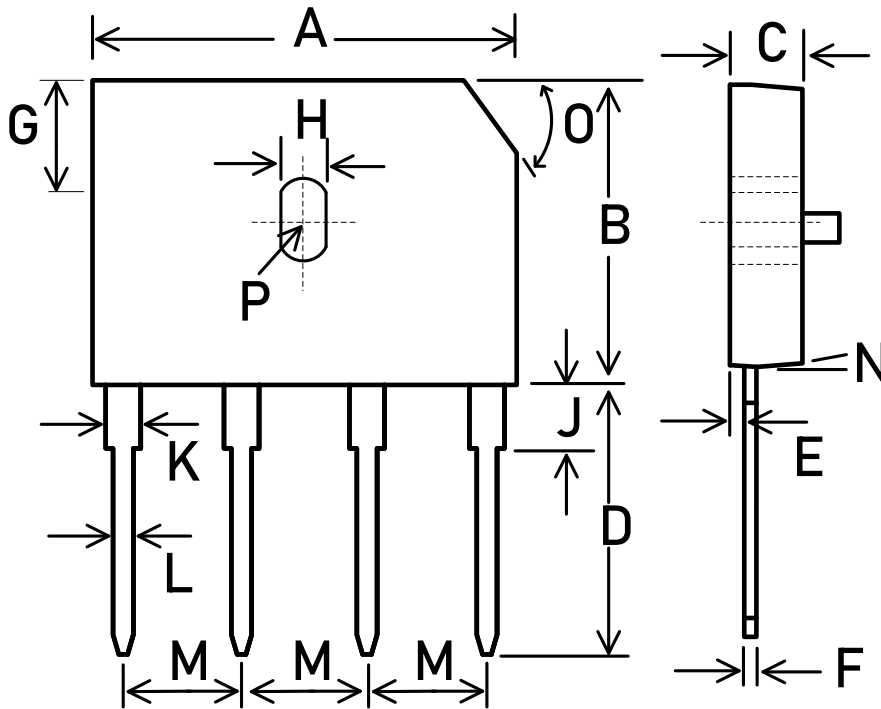

SYMBOL	MILLIMETER	
	MIN.	MAX.
A	21.80	22.30
B	18.30	18.80
C	3.30	3.60
D	17.50	18.00
E	0.76	1.00
F	0.45	0.55
G	7.40	7.90
H	3.50	4.10
I	1.65	2.16
J	2.25	2.75
K	2.00	2.40
L	1.00	1.30
M	4.83	5.33
N	7.0° TYP.	
O	(3.2)x45°	
P	1.90PADIUS	

