


# MOUNTING LAYOUT

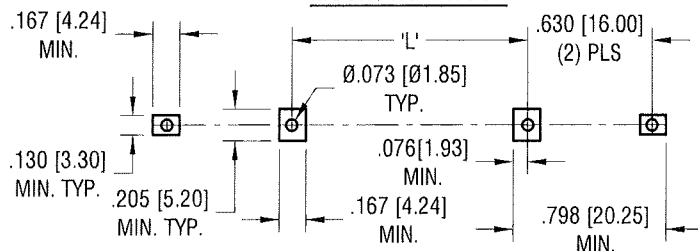


| BATTERY | 'L'           |
|---------|---------------|
| CR123A  | .270 [6.85]   |
| 18350   | .324 [8.23]   |
| 18650 * | 1.584 [40.23] |
| 17500   | 2.175 [55.23] |




\* FOR BATTERIES WITH  
BUILT-IN CIRCUIT PROTECTION  
(67mm LONG)

THIS DOCUMENT IS THE PROPERTY OF  
KEYSTONE ELECTRONICS CORP. AND  
SHALL NOT BE REPRODUCED, DISTRIBUTED  
OR USED AS A BASIS FOR MANUFACTURE  
WITHOUT PRIOR WRITTEN PERMISSION  
FROM KEYSTONE ELECTRONICS CORP.

# ACTUAL SIZE



DETAIL 'A'

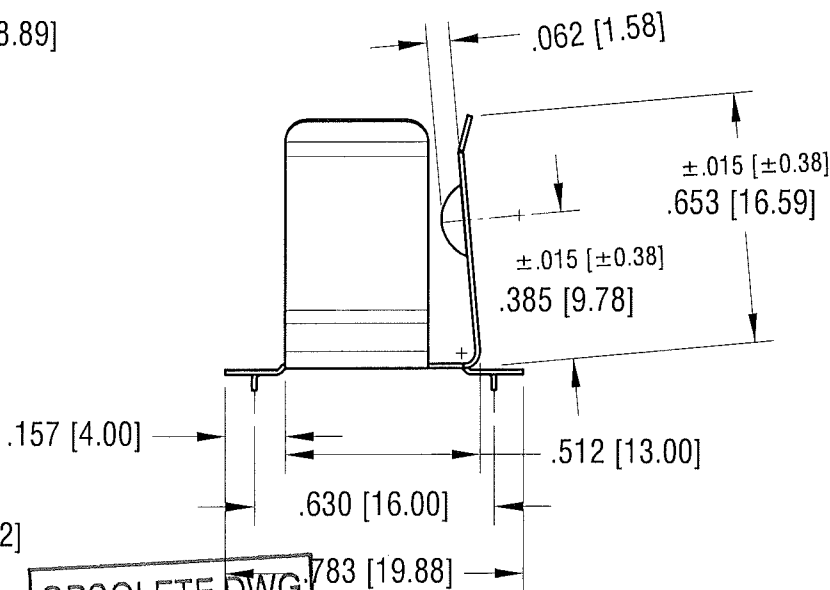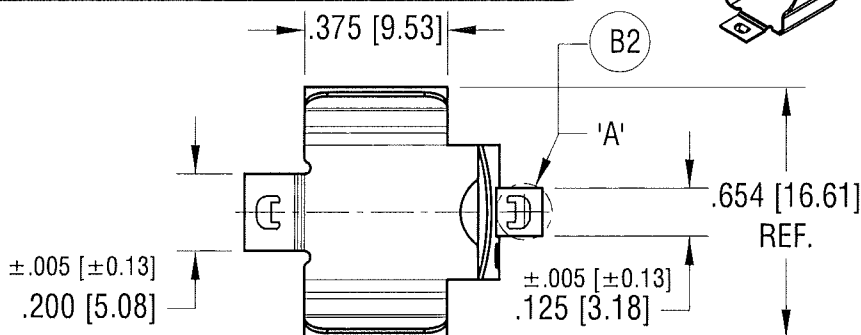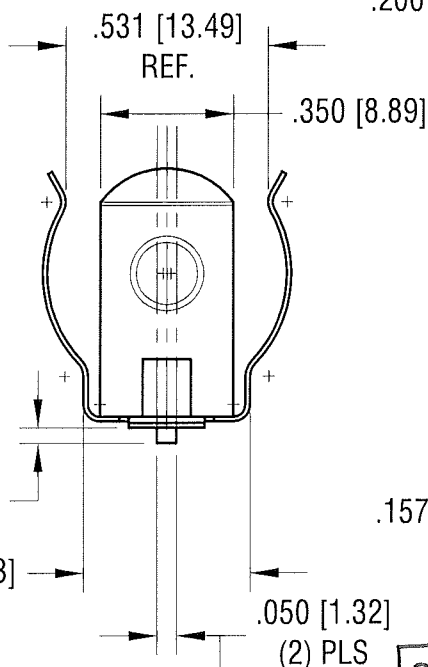

**OBSELETE DWG**  
For Reference Only

## NOTE:

1. HEAT TREAT TO SPRING TEMPER

PCB PROTECTION CIRCUITS ARE REQUIRED  
WHEN USED WITH LITHIUM-ION BATTERIES

## KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

### PART NAME

16mm - 19mm SM BATTERY CLIP

### MATERIAL

.012 [0.30] TH'K ANNEALED SPRING STEEL

### FINISH

TIN NICKEL PLATE

### DRN BY

NT

### DATE

1.17.18

### APP'D

SCALE

2X

### TOLERANCES

INCH [MM]

### DECIMAL

± .010 [±0.25]

### ANGULAR

± 2°

UNLESS OTHERWISE SPECIFIED

### CODE

C

### DWG NO.

254

8.15.22

B1 WAS .060, ADD RELIEF B2  
CHANGE AS PER ECN 22-141

B

6.14.21

REMOVE HOLE FOR WIRE  
CHANGE AS PER ECN 21-053

A

DATE

DESCRIPTION

REV.