




Surface Mount Superfast Recovery Rectifier

Features

- Top-side Cooling(TSC) Packaging technology
- Compact and Slim Packaging Solutions
- Superfast reverse recovery time
- For surface mounted applications
- Low reverse leakage
- High forward surge current capability
- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Meets MSL level 1, per J-STD-020
- Lead free in comply with EU RoHS 2011/65/EU directives



Mechanical Data

- Case: SMHS
- Terminal: Leads solderable per MIL-STD-750 Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any

Ordering Information

Part Number	Shipping	Reel
LTE1AS THRU LTE1JS	15000PCS Tape&Reel	13 inches

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	Symbol	LTE1AS	LTE1BS	LTE1CS	LTE1DS	LTE1ES	LTE1GS	LTE1JS	Unit
	Marking	E1A	E1B	E1C	E1D	E1E	E1G	E1J	
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	300	400	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	V
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	600	V
Maximum average forward rectified current at T _L =55°C	I _(AV)	1							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30							A
Maximum instantaneous forward voltage at 1A	V _F	1				1.25		1.68	V
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	1 100							μA
Maximum reverse recovery time (Note1)	T _{RR}	35							ns
Typical Junction Capacitance (Note2)	C _J	15							pF
Typical thermal resistance (Note3)	R _{θJA} R _{θJC}	63 7							°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150							°C

Note: (1) Reverse recovery condition $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$.
(2) Measured at 1MHz and applied reverse voltage of 4.0V D.C.
(3) P.C.B. mounted with 0.08" × 0.08" (2mm × 2mm) copper pad areas.



Characteristics Curves

FIG. 1 FORWARD CURRENT DERATING CURVE

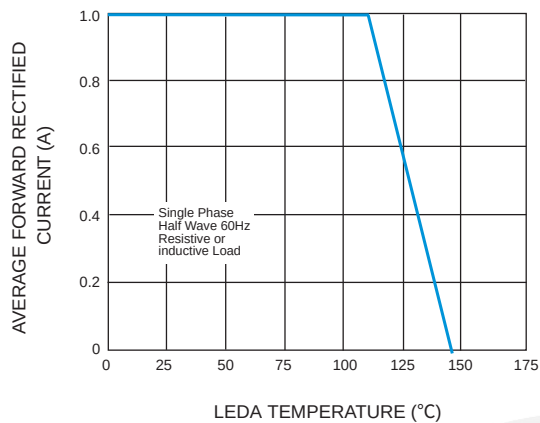


FIG. 2 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

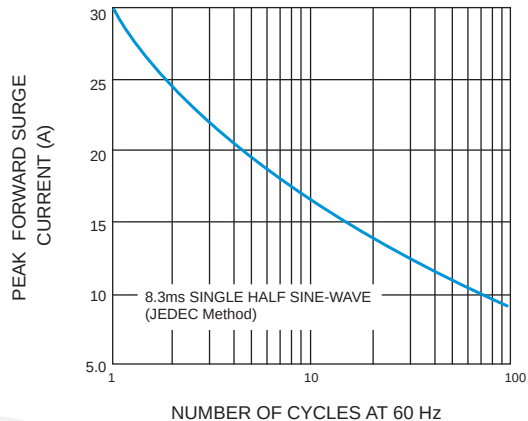


FIG. 3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

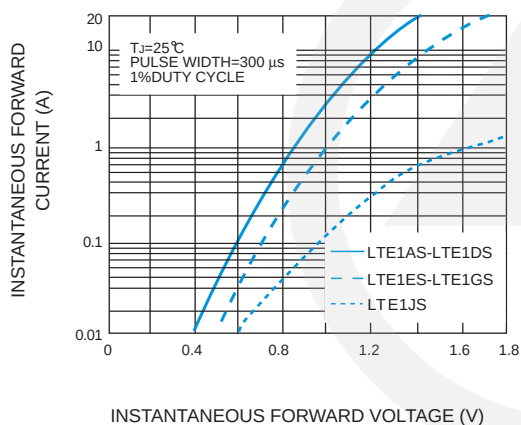


FIG. 4 TYPICAL REVERSE CHARACTERISTICS


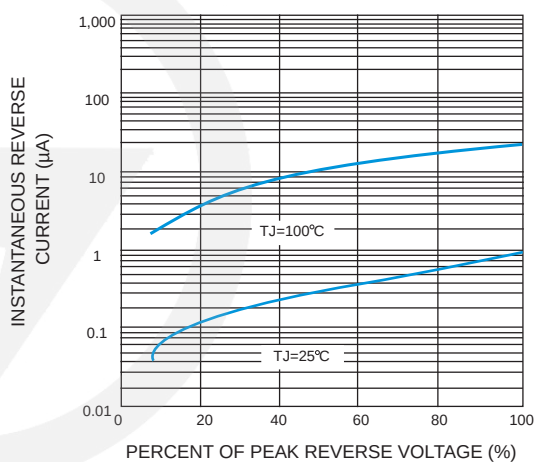



FIG. 5 TYPICAL JUNCTION CAPACITANCE

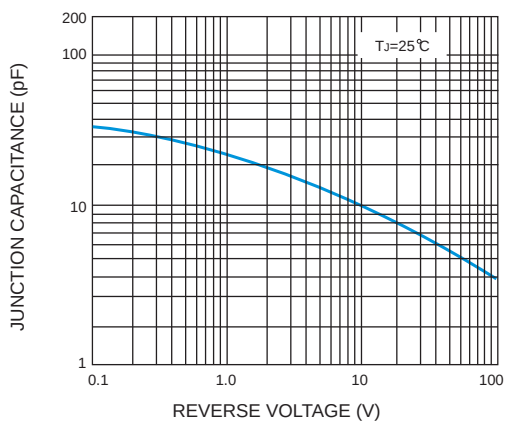

Package Outline

SMHS

Unit : mm

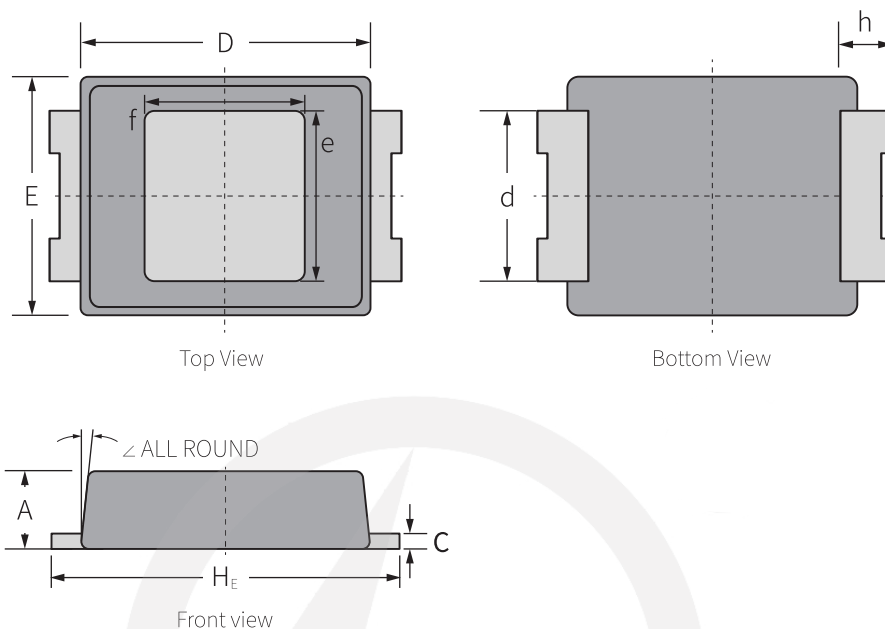


UNIT		A	C	D	E	H _E	d	e	f	h	∠
mm	max	0.99	0.25	2.90	2.10	3.50	1.30	1.30	1.25	0.70	6°
	min	0.83	0.15	2.50	1.70	2.90	1.10	1.10	1.05	0.50	

Suggested Pad Layout

SMHS

Unit : mm

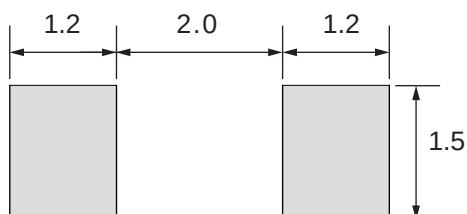


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm
3. The pad layout is for reference purpose only.

Carrier Tape Dimensions

Unit : mm


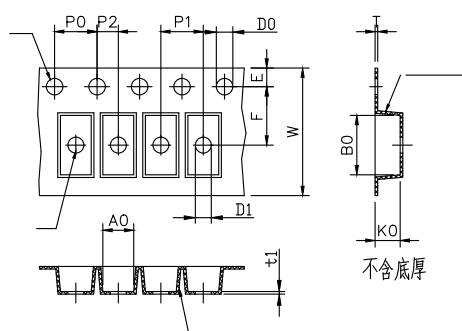


Symbol	Spec	Symbol	Spec
W	8.00±0.10	P2	2.00±0.10
E	1.75±0.10	t	0.22±0.02
F	3.50±0.10	t1	Min. 0.05
D0	1.55±0.10	A0	2.15±0.10
D1	1.05±0.10	B0	3.40±0.10
P0	4.00±0.10	K0	1.15±0.10
P1	4.00±0.10		

Reel Dimensions

Unit : mm

13" Reel




D5	Φ330.0±5.0
D6	Φ13.5±0.5
H	2.5±1.0
W2	12±2.0

Quantity: 15000PCS


Packaging



15000 PCS/Reel



5 Reel/Inner Box
75K PCS/Inner Box



Dim(Unit:mm)
340mm*340mm*85mm

Dim(Unit:mm)
360mm*360mm*355mm




4 Boxes per carton
300K PCS per carton

13 inches Reel



Recommended Soldering Conditions

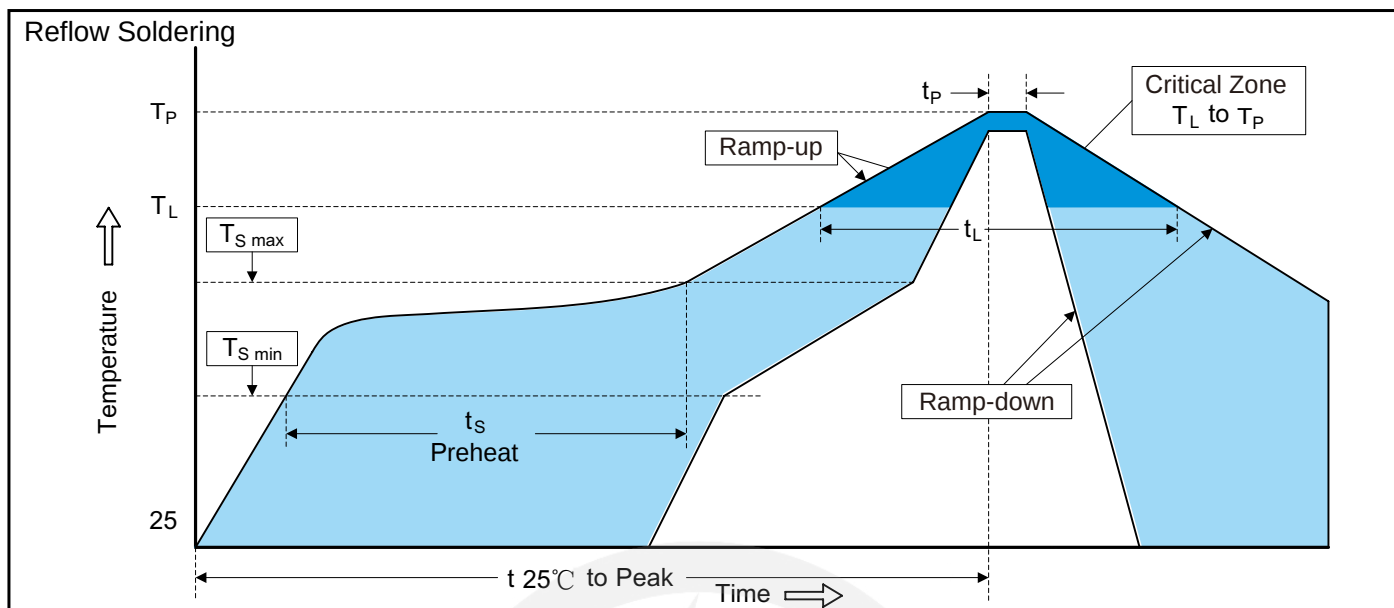

Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3°C/second max.
Preheat	
-Temperature Min ($T_{S\ min}$)	150°C
-Temperature Max ($T_{S\ max}$)	200°C
-Time (min to max) (t_s)	60-180 seconds
$T_{S\ max}$ to T_L	
-Ramp-up Rate	3°C/second max.
Time maintained above:	
-Temperature (T_L)	217°C
-Time (t_L)	60-150 seconds
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_P)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

Important Notice and Disclaimer

Leading-Tech reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Leading-Tech makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Leading-Tech assume any liability for application assistance or customer product design.

Leading-Tech does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Leading-Tech.

Leading-Tech products are not authorized for use as critical components in life support devices or systems without express written approval of Leading-Tech.

Version Update Information

Series NO.	Enactment/Revision Date	Effective Date	Version	Revision Content	Revision Reason	Revision Person	Note
01	2025.09.09	2025.09.09	1.0	New file	/	Ding	