


4G/3G/2G

CAT1 LORA COMBINATION SMD ANTENNA

   698-960 MHz | 1710-2690 MHz

Dimensions: 44.3x18.5x1.0mm

ClearanceArea: 70x25mm

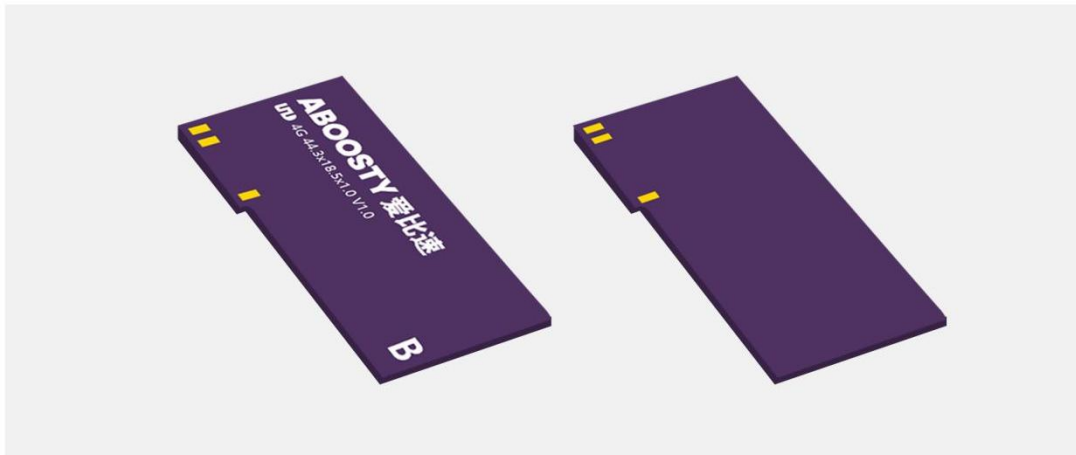

Model: ADCP003





Table of Contents

1 FEATURES & BENEFITS..... 1

2 APPLICATIONS..... 1

3 ORDER INFORMATION..... 1

4 REFERENCE GUIDE..... 2

5 EVALUATION BOARD WITH THE ANTENNA..... 2

6 MATCHING NETWORK..... 3

7 RECOMMENDED LAYOUT..... 3

8 ELECTRICAL PERFORMANCE..... 4

 8.1 VSWR and Return Loss (dB)..... 4

 8.2 Gain (dBi) and Total Efficiency (%)..... 5

 8.3 Radiation Patterns 7

9 SOLDERING CONDITIONS..... 10

10 PACKAGING..... 11

 10.1 Optimal Storage Conditions for Packaged Reels..... 11

 10.2 Packagings and Dimensions (Unit: mm)..... 11

11 ANTENNA CERTIFICATION..... 12

12 WELCOME ALL ANTENNA OEM/ODM PROJECTS..... 13

www.aboosty.com

The materials provided herein, which are intended for illustration purposes only, are believed to be reliable and correct. However, no responsibility is further assumed for inaccuracies or incompleteness, and all such information shall be entirely at the user's risk. All information is subject to change without prior notice.
Copyright © 2024 ShenZhen MyAntenna RF Technology Co., Ltd. All Rights Reserved.




1 FEATURES & BENEFITS

- Low Profile
- Light Weight
- Easy to Integrate
- Intended for SMD Mounting
- Reduced Cost and Time-to-Market

2 APPLICATIONS

- 3G (UMTS) and 4G (LTE) Mobile Communication
- Networks
- Wireless Routers and Modems
- Internet of Things (IoT) Devices, M2M
- Remote Technology / Monitoring
- Consumer Tracking
- Smart Metering

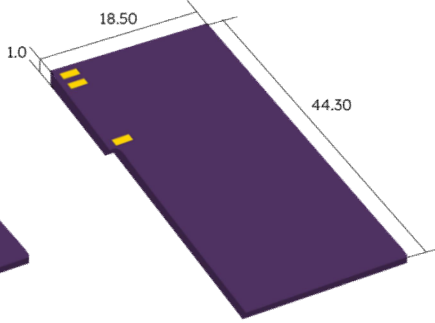Top  Bottom 	
Items	Dimensions (mm)
Length	44.3±0.2
Width	18.5±0.2
Thickness	1.0±0.1

3 ORDER INFORMATION

Product Name	4G/3G/2G, Cat 1, LoRa Combination SMD Antenna
Part Number	ADCP003
Dimensions	44.3x 18.5 x 1.0mm
Mounting	SMT
Packaging	Tape & Reel
MOQ	1000 pcs/reel

4 REFERENCE GUIDE


Technical Features	698-960 MHz	1710-2690 MHz
VSWR	5.1:1	3.5:1
Max Efficiency	69.29%	
Peak Gain	2.72 dBi	
Polarization	Linear	
Input Impedance	50Ω	
Operating Temperature	-40°C to +85°C	
Power Capacity	3W	
Dimensions (L x W x H)	44.3 x 18.5x 1.0 mm	
All data were measured in free space and on a reference ground plane of 120 mm length, 70 mm width, and 1.6 mm thickness. Application data might vary.		

5 EVALUATION BOARD WITH THE ANTENNA


The evaluation board provides operation at 698-960, 1710-2690 MHz.

Evaluation Board dimension: 120 x 70 x 1.6 mm


Clearance Area: 25.0 x 70.0 mm

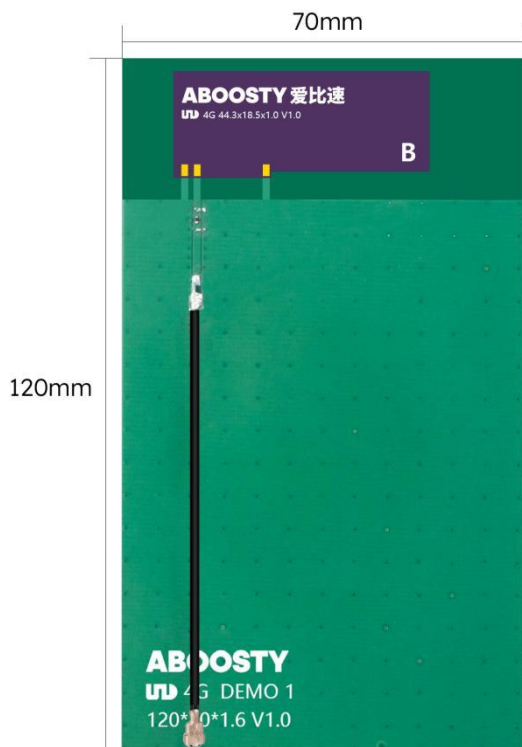

6 MATCHING NETWORK

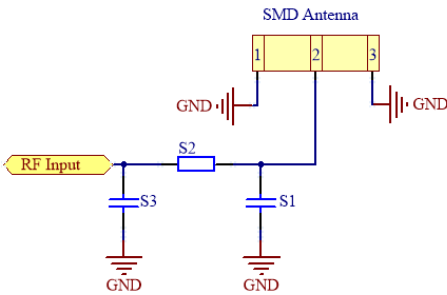

7 RECOMMENDED LAYOUT

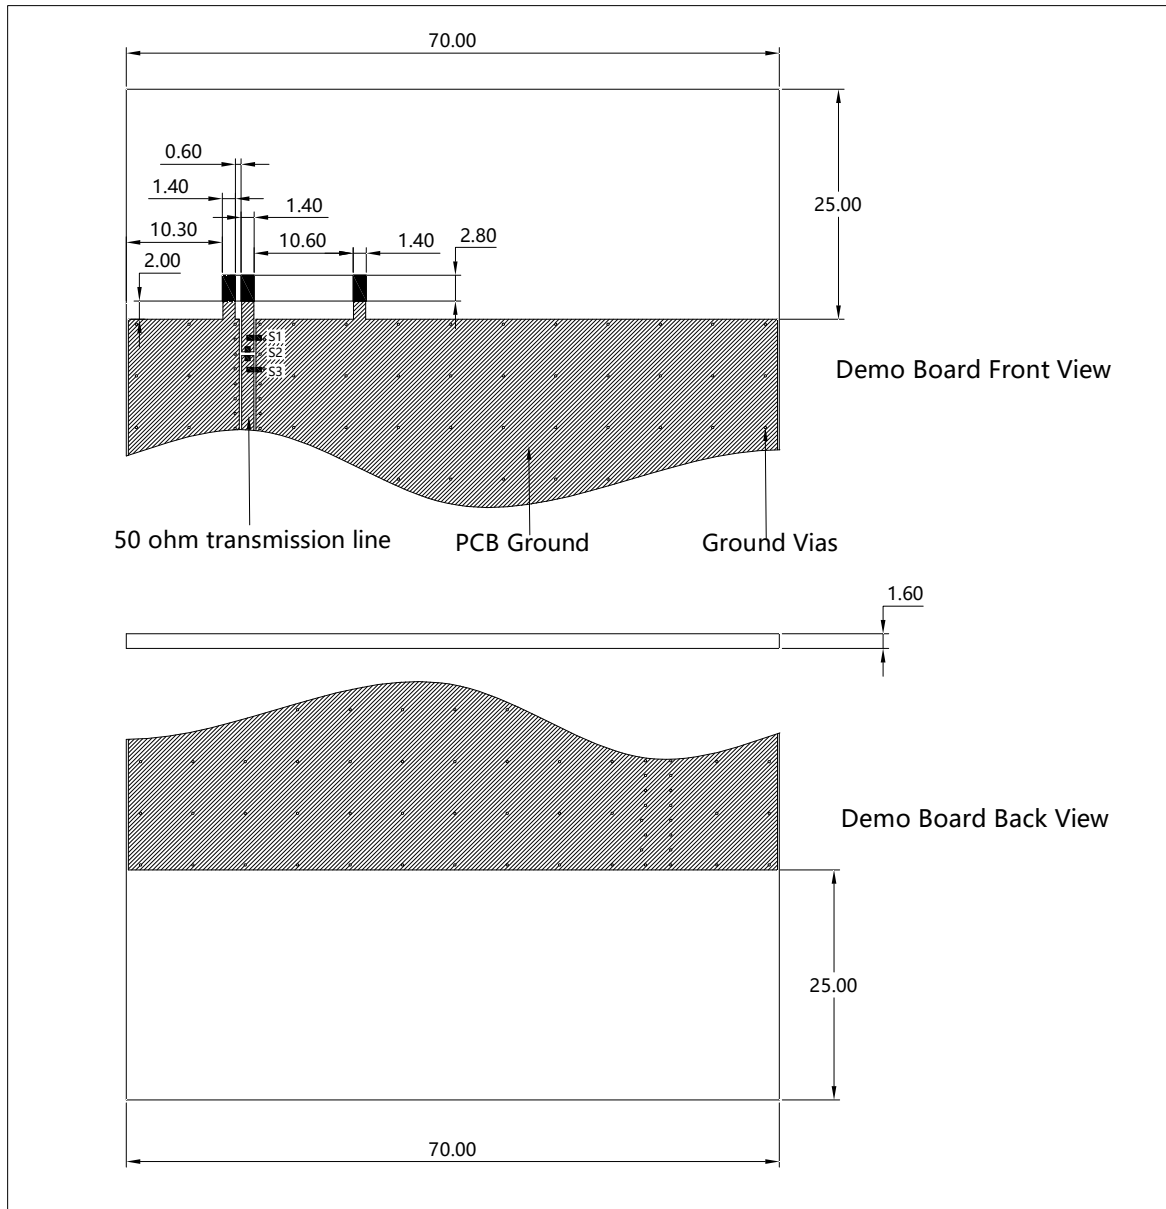


Tag Number	Value	Brand	PN
S1	NC	NC	NC
S2	RES SMD 0402 0R $\pm 1\%$	UniOhm	D03-0100010000
S3	NC	NC	NC

8 ELECTRICAL PERFORMANCE

© Note


The data displayed in Chapter 8 were measured in free space and on a reference ground plane of 120 mm length, 70 mm width, and 1.6 mm thickness.

8.1 VSWR and Return Loss (dB)

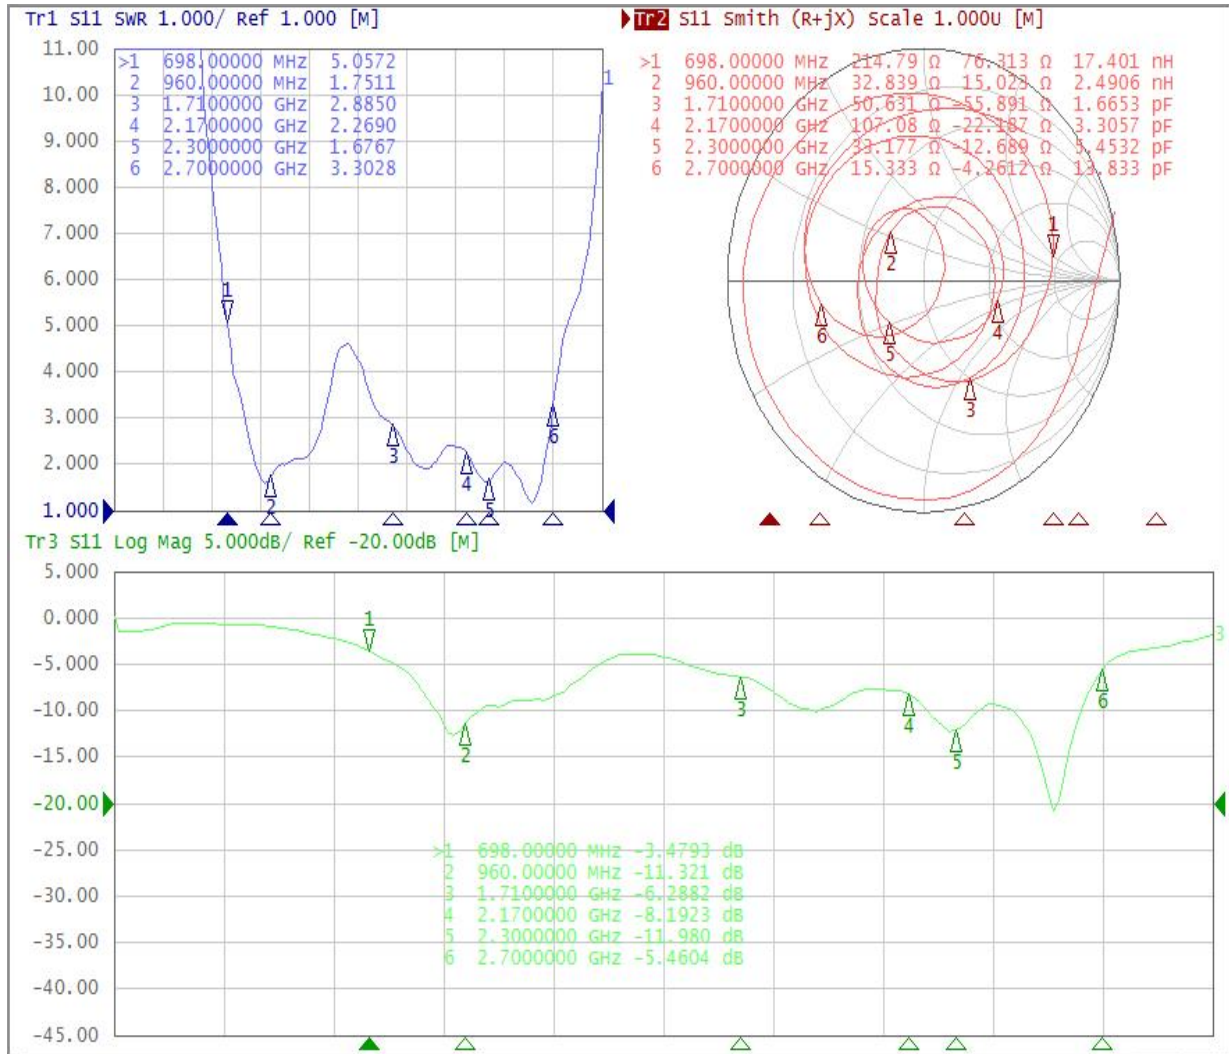




8.2 Gain (dBi) and Total Efficiency (%)

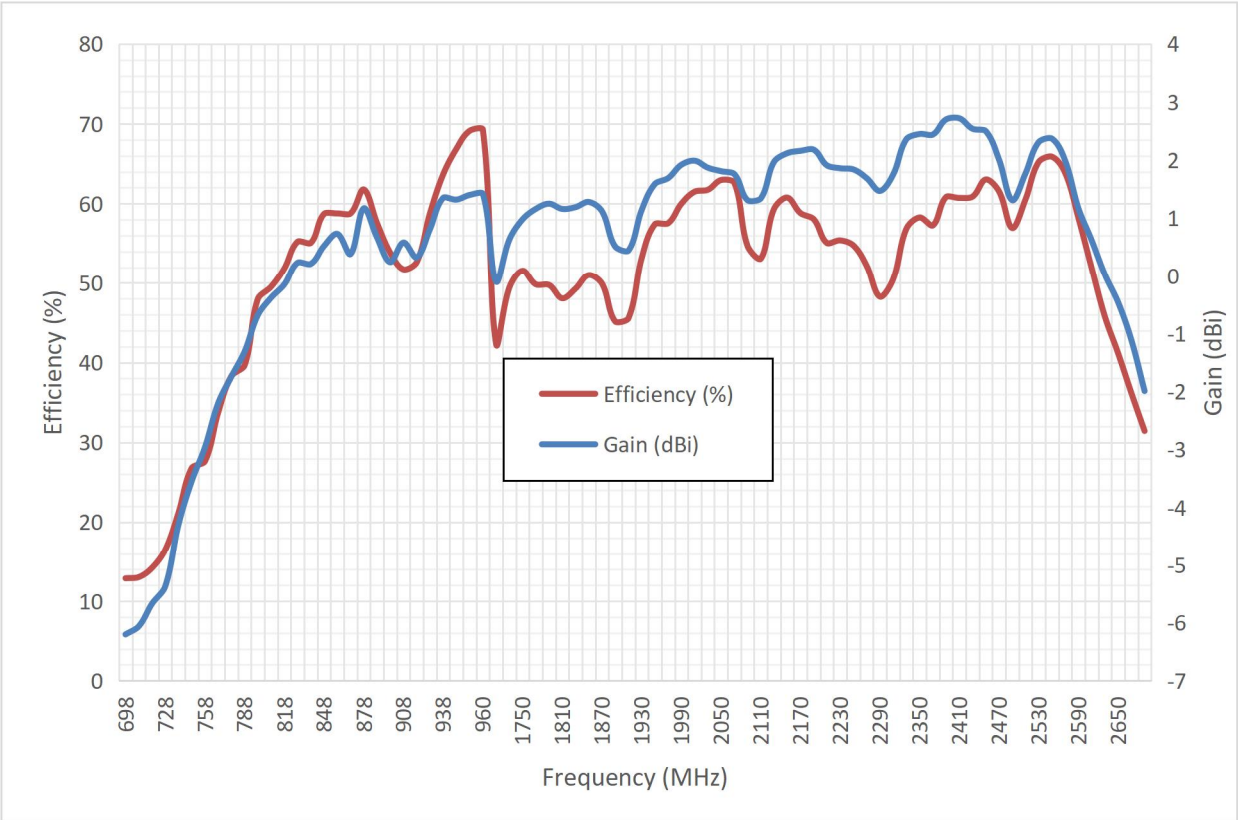





Frequency (MHz)	Gain (dBi)	Efficiency (%)	Frequency (MHz)	Gain (dBi)	Efficiency (%)	Frequency (MHz)	Gain (dBi)	Efficiency (%)
698	-6.2	12.88	958	1.4	69.12	2190	2.18	58.06
708	-6.06	13.03	960	1.42	69.29	2210	1.91	55.07
718	-5.67	14.2	1710	-0.1	42.34	2230	1.86	55.4
728	-5.37	16.51	1730	0.63	49.41	2250	1.84	54.76
738	-4.29	21.17	1750	0.98	51.56	2270	1.69	52.2
748	-3.54	26.79	1770	1.16	49.82	2290	1.47	48.27
758	-2.96	27.64	1790	1.25	49.74	2310	1.75	50.46
768	-2.2	33.75	1810	1.16	48.06	2330	2.36	56.85
778	-1.74	38.31	1830	1.19	49.28	2350	2.45	58.27
788	-1.31	39.66	1850	1.28	51.01	2370	2.44	57.28
798	-0.68	47.99	1870	1.12	49.92	2390	2.7	60.83
808	-0.38	49.52	1890	0.51	45.15	2410	2.72	60.72
818	-0.15	51.86	1910	0.44	45.54	2430	2.54	60.88
828	0.23	55.23	1930	1.14	53.16	2450	2.5	63.03
838	0.21	55.08	1950	1.59	57.43	2470	2.01	61.55
848	0.52	58.72	1970	1.69	57.55	2490	1.31	56.95
858	0.73	58.78	1990	1.92	59.99	2510	1.77	60.53
868	0.38	58.77	2010	1.99	61.5	2530	2.31	65.23
878	1.17	61.78	2030	1.87	61.74	2550	2.37	65.88
888	0.67	57.58	2050	1.81	62.96	2570	1.99	63.86
898	0.24	53.84	2070	1.76	62.64	2590	1.17	58.23
908	0.58	51.74	2090	1.31	54.7	2610	0.62	51.92
918	0.32	52.64	2110	1.34	53.1	2630	0.02	45.76
928	0.81	58.77	2130	1.97	59.35	2650	-0.46	41.17
938	1.35	63.67	2150	2.12	60.76	2670	-1.11	36.19
948	1.32	66.87	2170	2.16	58.82	2690	-1.99	31.44

8.3 Radiation Patterns

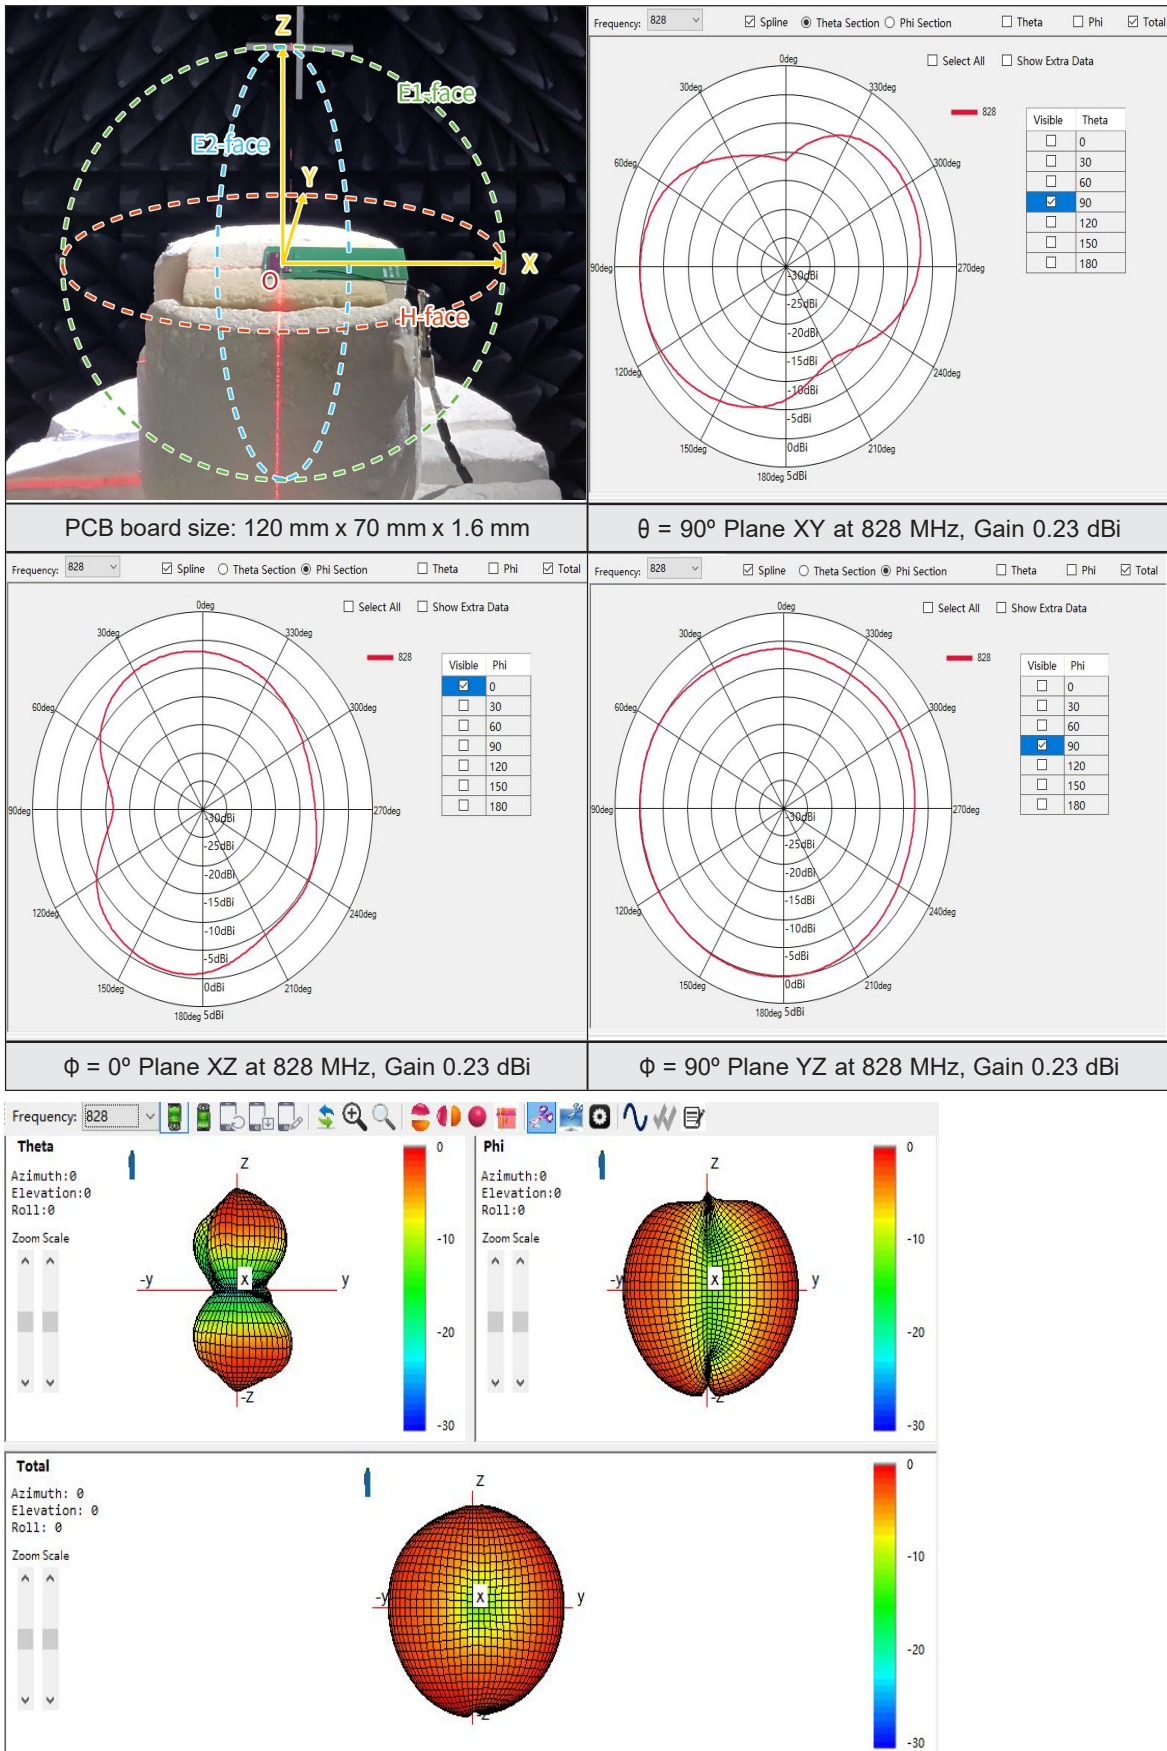


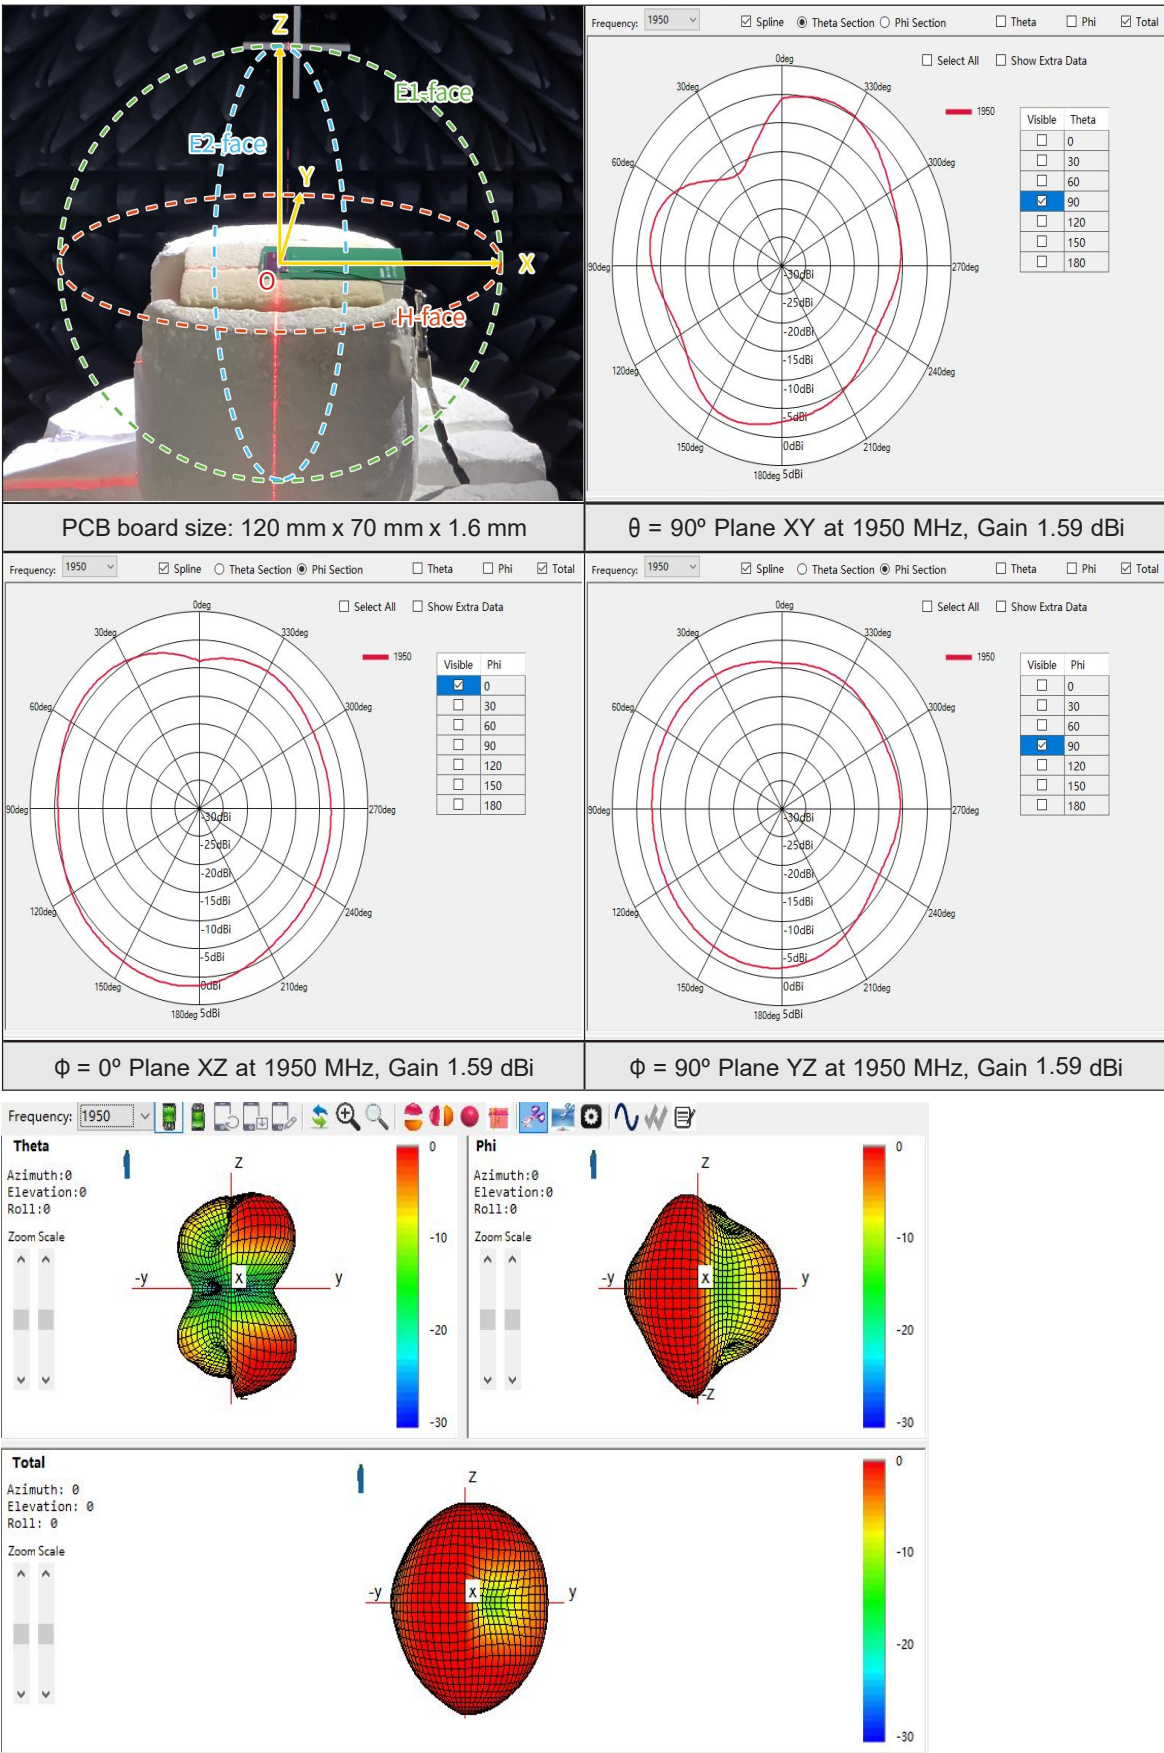

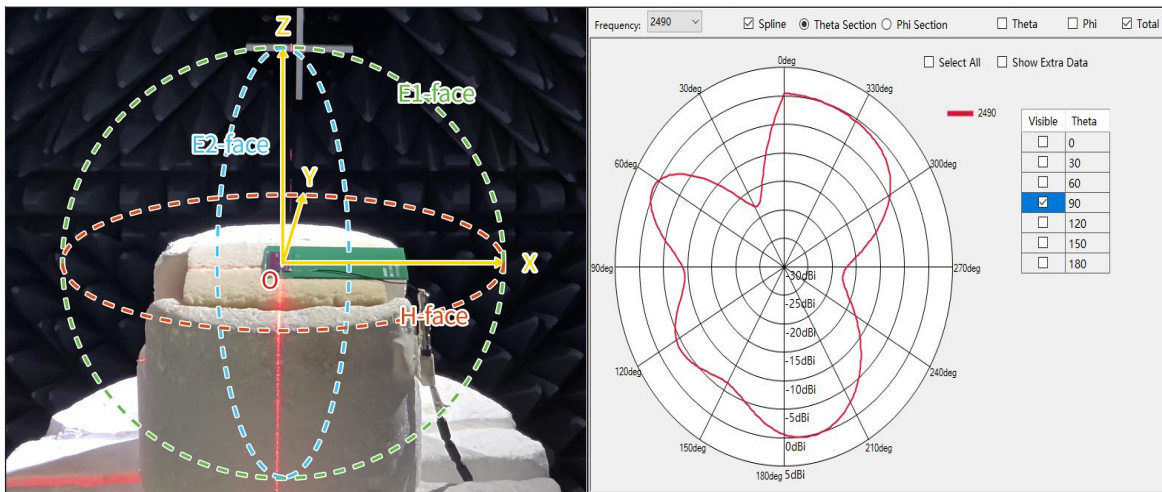


PCB board size: 120 mm x 70 mm x 1.6 mm

$\theta = 90^\circ$ Plane XY at 2490 MHz, Gain 1.31 dBi

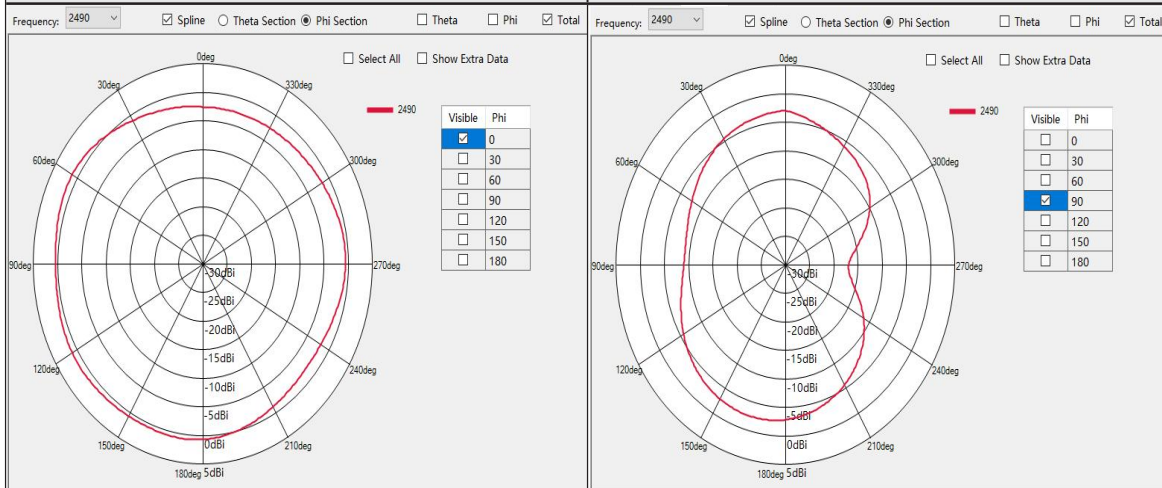

$\phi = 0^\circ$ Plane XZ at 2490 MHz, Gain 1.31 dBi

$\phi = 90^\circ$ Plane YZ at 2490 MHz, Gain 1.31 dBi

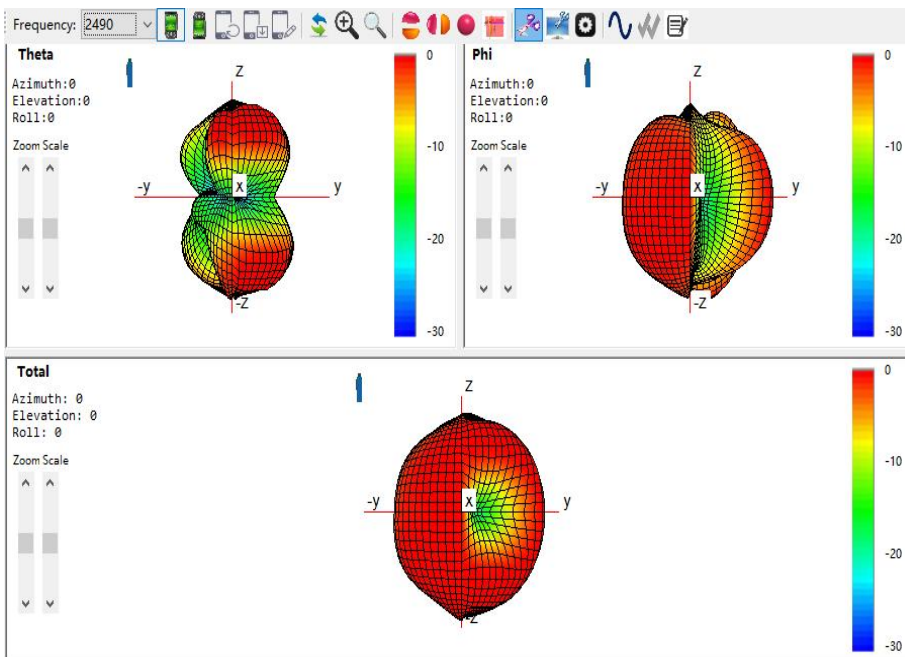


9 SOLDERING CONDITIONS

This antenna is suitable for lead free soldering.

The reflow duration should be adjusted to create good solder joints without raising the antenna temperature beyond the allowed maximum of 260°C.

The figure below shows the temperature profile for soldering.

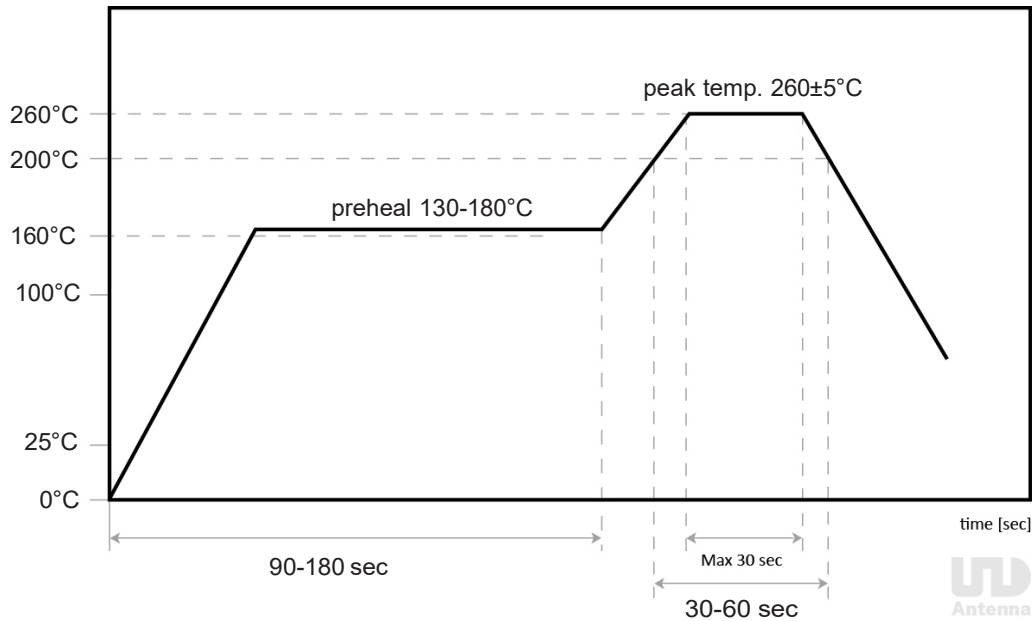

10 PACKAGING

10.1 Optimal Storage Conditions for Packaged Reels

Temperature	-5°C to 40°C
Humidity	Less than 70% RH
Shelf life	18 months
Storage place	Away from corrosive gas and direct sunlight
Packaging	Reels should be stored in unopened sealed manufacturer's plastic packaging.

© Note

Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short-term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in like storage conditions as in the above table.

PACKING INFORMATION	
Reel Type	330mm Black Split Reel
Reel Dimensions	330*100*72mm
Length per Reel	24,480 meters
Number of Spaces per Reel	1020 pockets
Final Pocket Count	1000PCS + 16 spaces left empty in the front and rear
Protective Tape	N/A
TOOLING INFORMATION	
Number of Molds	253 cycles
Number of Cavities per Mold	12 cavities, mold length 96mm

DIMENSIONS ARE IN MILLIMETERS	
UNLESS OTHERWISE SPECIFIED	
TOLERANCES	
ANGLES = ±3°	
UP TO 6 = ±0.1	
6-40 = ±0.2	
40-120 = ±0.6	
120-315 = ±1.0	
ABOVE 315 = ±1.6	

MyAntenna®	
CUS P/N:	4G SMD ANTENNA
PART NO.:	M01-X4G4418P01
APPD:	陈建伟
CHKD:	陈建伟
DR:	陈建伟
DWG NO.:	4G SMD ANTENNA
SCALE	1:1
SHEET	1/1
REV.	V01



11 ANTENNA CERTIFICATION

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACH Approval	Conform or declared [(EC)1907/2006]
Hazardous material regulation conformance: A certificate of conformance is available upon request. Feel free to consult us for details.	



12 WELCOME ALL ANTENNA OEM/ODM PROJECTS

About ABOOSTY



10+ years in antenna R&D, production, and OEM/ODM



House of Aboosty: 1 M+ units annual output capacity



Factory directly competitive price



Industry-leading quality levels



Professional team-work & support



Quick price and lead time estimation

Why Choose ABOOSTY



Innovative and patented design solutions



Full terminal devices anechoic chamber test



Co-location with its custom



Competitive price



Strict inspection




Prompt reply within 24h

What We Provide

OEM/ODM Services	
Light Customization	Deep Customization
• Logo • Packaging • Cables&Connectors	• In-depth tailoring for specific applications • Functional enhancements • Environmental adaptations • Vertical certifications • ...

Custom Process

Light Customization Process

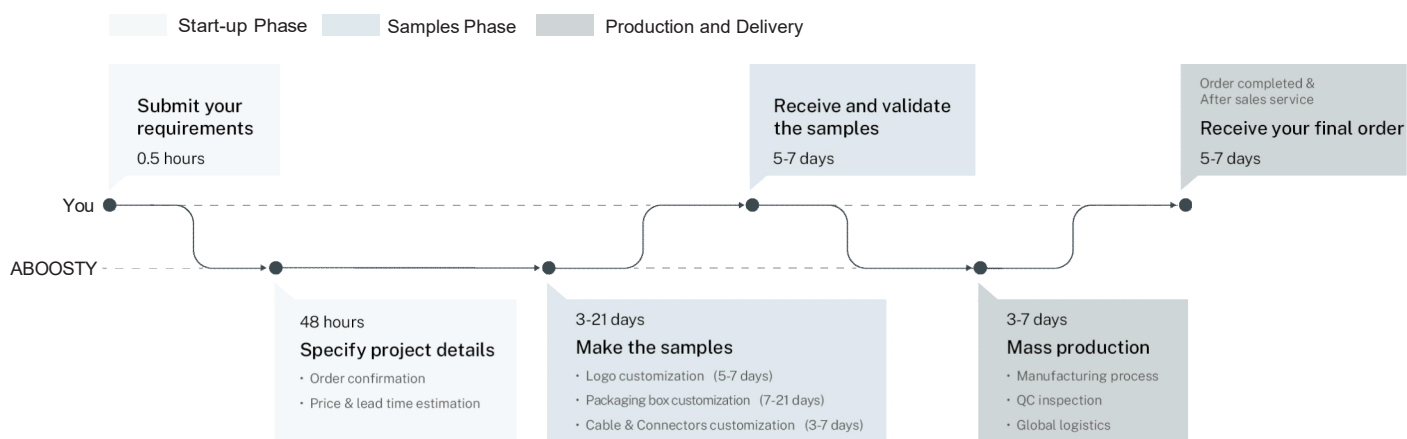

Deep Customization Process

