


Features

- Low forward Voltage
- Fast switching



DFN1006-2L





Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$)

Parameter	Symbols	Value	Unit
Maximum DC Blocking Voltage	V_R	70	V
Forward Continuous Current	I_F	70	mA
Non-Repetitive Peak Forward Surge Current at 8.3ms	I_{FSM}	100	mA
Power Dissipation	P_D	120	mW
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	833	$^{\circ}\text{C/W}$
Junction Temperature	T_J	125	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55 to +125	$^{\circ}\text{C}$

Electrical Characteristics ($T_A=25^{\circ}\text{C}$)


Parameter	Symbols	Min.	Max.	Unit
Forward Voltage at $I_F = 1 \text{ mA}$ at $I_F = 15 \text{ mA}$	V_F	-- --	0.41 1	V
Reverse Current at $V_R = 50 \text{ V}$	I_R	--	0.1	μA
Breakdown Voltage at $I_R = 10 \mu\text{A}$	$V_{R(BR)}$	70	--	V
Total Capacitance at $V_R = 1 \text{ V}$, $f = 1 \text{ MHz}$	C_T	--	2	pF
Reverse Recovery Time at $I_F = I_R = 10 \text{ mA}$, $I_{rr} = 0.1 \times I_R$, $R_L = 100 \Omega$	T_{rr}	--	5	ns

Typical Characteristic Curves

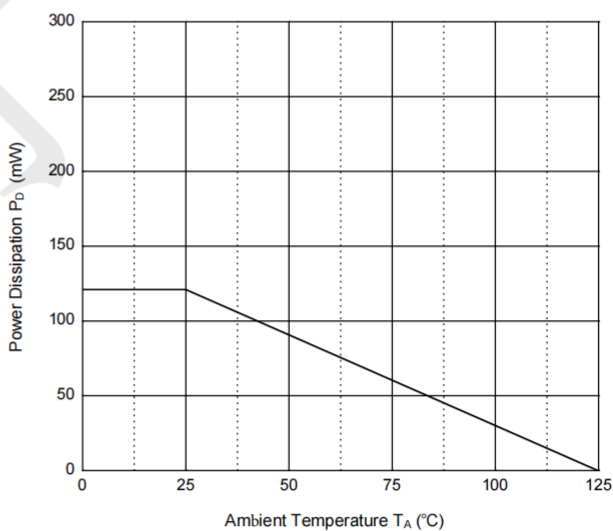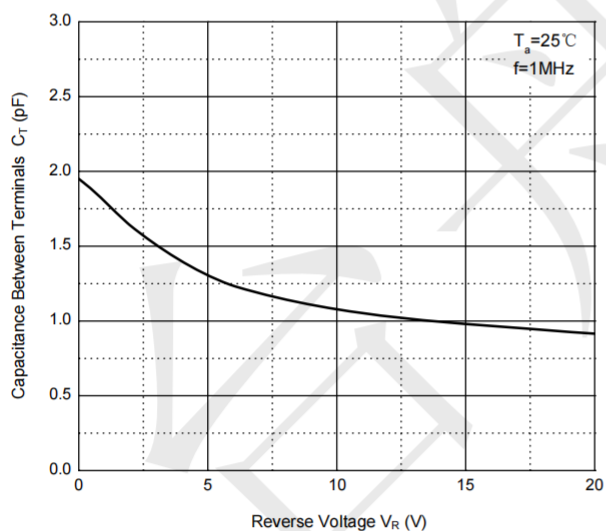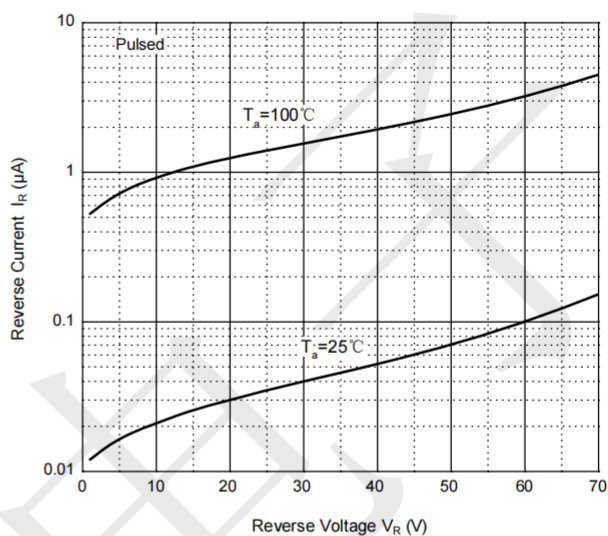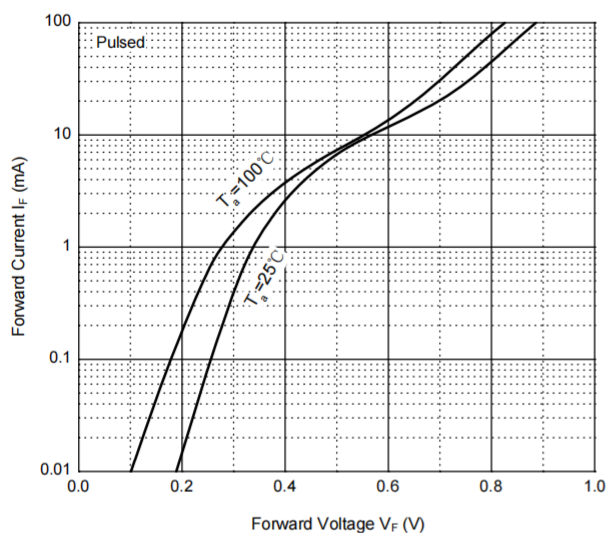

Package information (Unit: mm)

DFN1006-2L

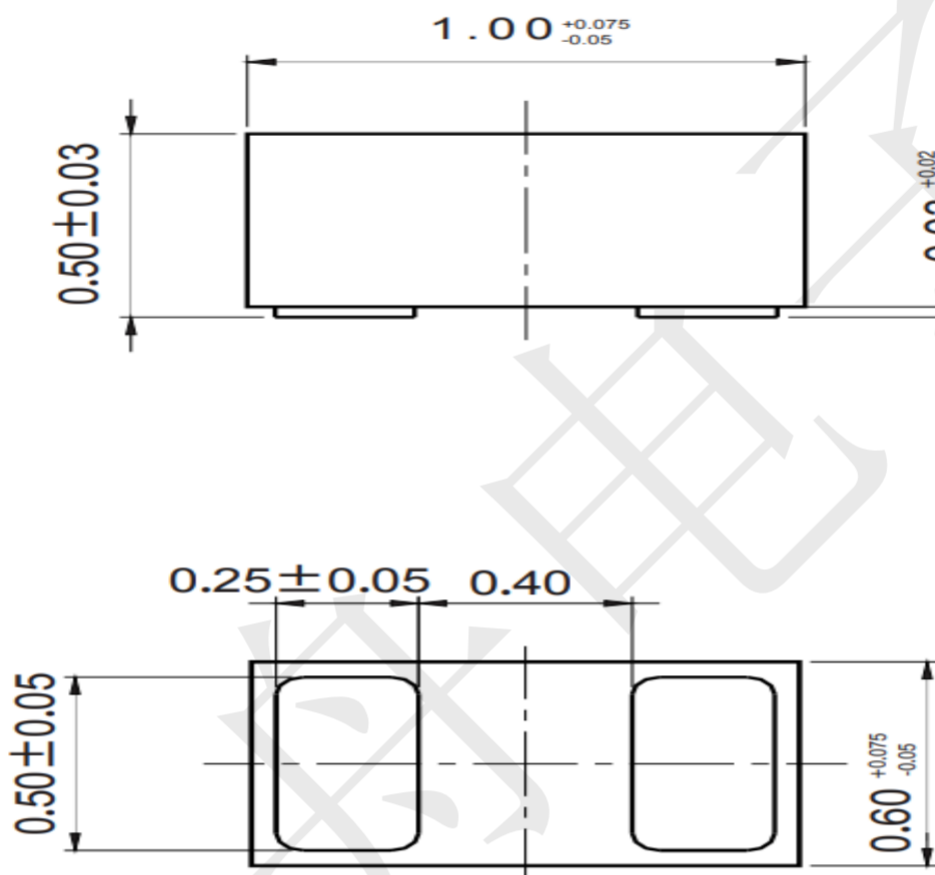

Mounting Pad Layout (Unit: mm)

