

DS34C87 CMOS Quad TRI-STATE[®]

Differential Line Driver

General Description

The DS34C87 is a quad differential line driver designed for digital data transmission over balanced lines. The DS34C87 meets all the requirements of EIA standard RS-422 while retaining the low power characteristics of CMOS. This enables the construction of serial and terminal interfaces while maintaining minimal power consumption.

The DS34C87 accepts TTL or CMOS input levels and translates these to RS-422 output levels. This part uses special output circuitry that enables the individual drivers to power down without loading down the bus. The DS34C87 also includes special power up and down circuitry which will TRI-STATE the outputs during power up or down, preventing spurious glitches on its outputs. This device has separate enable circuitry for each pair of the four drivers. The DS34C87 is pin compatible to the DS3487.


All inputs are protected against damage due to electrostatic discharge by diodes to Vcc and ground.

Features

- TTL input compatible.
- Typical propagation delays: 8 ns.
- Typical output skew: 0.5 ns.
- Outputs won't load line when Vcc = 0V.
- Meets the requirements of EIA standard RS-422.
- Operation from single 5V supply.
- TRI-STATE outputs for connection to system buses.
- Low quiescent current.



Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
DS34C87N	DIP-16	DS34C87	TUBE	1000pcs/box
DS34C87M/TR	SOP-16	DS34C87	REEL	2500pcs/reel
DS34C87MT/TR	TSSOP-16	34C87	REEL	2500pcs/reel

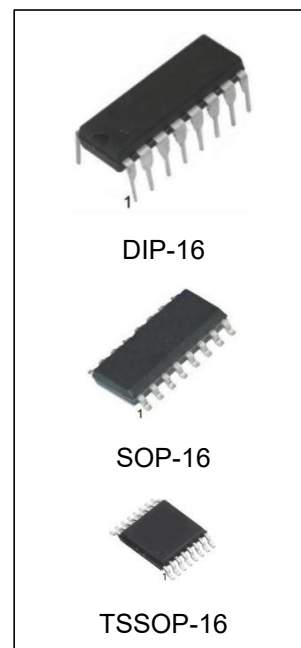

Connection and Logic Diagrams

DIP-16/SOP-16/TSSOP-16

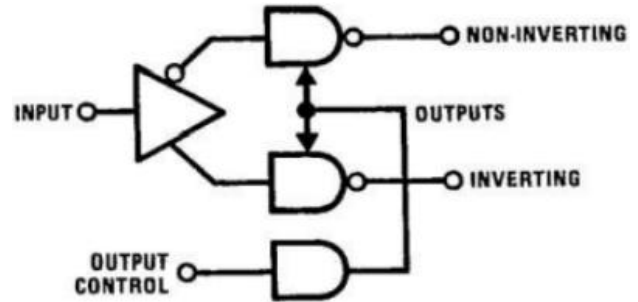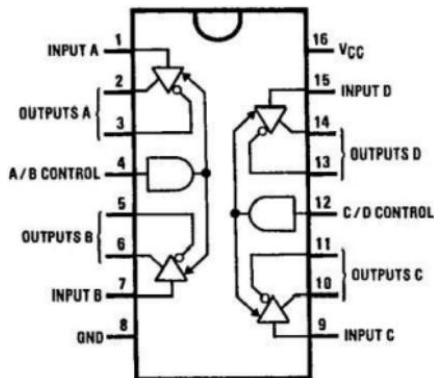

Truth Table

INPUT	CONTROL INPUT	NON-INVERTING OUTPUT	INVERTING OUTPUT
H	H	H	L
L	H	L	H
X	L	Z	Z

L=Low logic state

H= High logic state

X=Irrelevant

Z= TRI-STATE(high impedance)

Absolute Maximum Ratings (Notes1&2)

PARAMETER	LIMITS
Supply Voltage (V_{CC})	-0.5 to 7.0V
DC Voltage (V_{IN})	-1.5V to $V_{CC}+1.5V$
DC Output Voltage (V_{OUT})	-0.5V to 7V
Clamp Diode Current(I_{IK}, I_{OK})	± 20 mA
DC Output Current, Per Pin(I_{OUT})	± 150 mA
DC V_{CC} OR GND Current (I_{CC})	± 150 mA
Storage Temperature Range(T_{STG})	-65°C to +150°C
Power Dissipation(note3)(P_O)	500 mW
lead temperature(T_L)(soldering 10 sec)	260°C

Operating Conditions

	MIN	MAX	UNITS
Supply Voltage(V_{CC})	4.50	5.50	V
DC Input or Output Voltage(V_{IN} V_{OUT})	0	V_{CC}	V
Operating Temperature Range (t_A)	-40	+85	°C
Input Rise Or Fall Times (t_r, t_f)		500	ns

DC Electrical Characteristics $V_{CC} = 5V \pm 10\%$ (Unless Otherwise Specified) (Note4)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{IH}	High Level Input Voltage		2.0			V
V_{IL}	Low Level Input Voltage				0.8	V
V_{OH}	High Level Output Voltage	$V_{IN} = V_{IH}$ OR V_{IL} , $I_{OUT} = -20$ MA	2.5			V
V_{OL}	Low Level Output Voltage	$V_{IN} = V_I$ OR V_L $I_{OUT} = 48$ MA			0.5	V
V_T	Differential Output Voltage	$R_L = 100\Omega$ (NOTE 5)	2.0			V
$ V_{T1} - V_{T2} $	Difference In Differential Output	$R_L = 100\Omega$ (NOTE 5)			0.4	V
V_{OS}	Common Mode Output Voltage	$R_L = 100\Omega$ (NOTE 5)			3.0	V
$ V_{OS1} - V_{OS2} $	Difference In Common Mode Output	$R_L = 100\Omega$ (NOTE 5)			0.4	V
I_{IN}	Input Current	$V_{IN} = V_{CC}, GND, V_{IH},$ OR V_{IL}			± 10	μA
I_{CC}	Quiescent Supply Current	$I_{OUT} = 0\mu A$, $V_{IN} = V_{CC}$ OR GND $V_{IN} = 2.4V$ OR $0.5V$ (NOTE 6)		200 0.8		μA MA
I_{OZ}	Tri-State Output Leakage Current	$V_{OUT} = V_{CC}$ OR GND CONTROL = V_{IL}		± 0.5	± 0.5	μA
I_{SC}	Output Short Circuit Current	$V_{IN} = V_{CC}$ OR GND (NOTE 7)	-30		-150	MA
I_{DFF}	Output Leakage Current Power Off	$V_{CC} = 0V$ $V_{OUT} = 6V$ $V_{OUT} = -0.25V$			100 -100	μA μA

Note1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured.

Note 2: Unless otherwise specified, all voltages are referenced to ground. all currents into device pins are positive; all currents out of device pins are negative.

Note3: Power Dissipation Temperature Derating "N" Package: -12 mW/ $^{\circ}C$ From $65^{\circ}C$ To $85^{\circ}C$.

"M" Package: -12 mW/ $^{\circ}C$ From $100^{\circ}C$ To $125^{\circ}C$.

Note4: Unless Otherwise Specified Min/Max Limits Apply Across The $-40^{\circ}C$ To $85^{\circ}C$ Temperature Range. All Typicals Are Given For $V_{CC} = 5V$ And $T_a = 25^{\circ}C$.

Note 5: See EIA Specification RS-422 For Exact Test Conditions.

Note 6: Measured per input. All other inputs at V_{CC} or gnd .

Note 7: Only one output at a time should be shorted.

Switching Characteristics $V_{CC}=5V\pm 10\%$, $t_r = t_f = 6ns$ (Figures 1, 2, 3, and 4) (Note 4)


SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
T_{PLH}, T_{PHL}	Propagation delay input to output	S1 Open		8		ns
SKEW	(note 8)	S1 Open		0.5		ns
T_{TLH}, T_{THL}	Differential output rise and fall times	S1 Open		8		ns
T_{PZH}	Output enable time	S1 Closed		13		ns
T_{PZL}	Output enable time	S1 Closed		15		ns
T_{PHZ}	Output disable time (note9)	S1 Closed		9		ns
T_{PLZ}	Output disable time (note9)	S1 Closed		10		ns
C_{PD}	Power dissipation capacitance (note 10)			100		pF
C_{IN}	Input capacitance			10		pF

Note 8:Skew is defined as the difference in propagation delays between complementary outputs at the 50% point.

Note9:Output isable time is the delay from ENABLE or $\overline{ENAB\bar{E}}$ being switched to the output transistors turning off. The actual disable times are less than indicated due to the delay added by the RC time constant of the load.

Note 10: C_{PD} determines the no load dynamic power consumption, $P_{DC} = C_{PD} V^2 ccf + I_{CC} V_{CC}$ and the no load dynamic current consumption, $I_s = C_{PD} V_{CC} f + I_{CC}$.

AC Test Circuit and Switching Time Waveforms

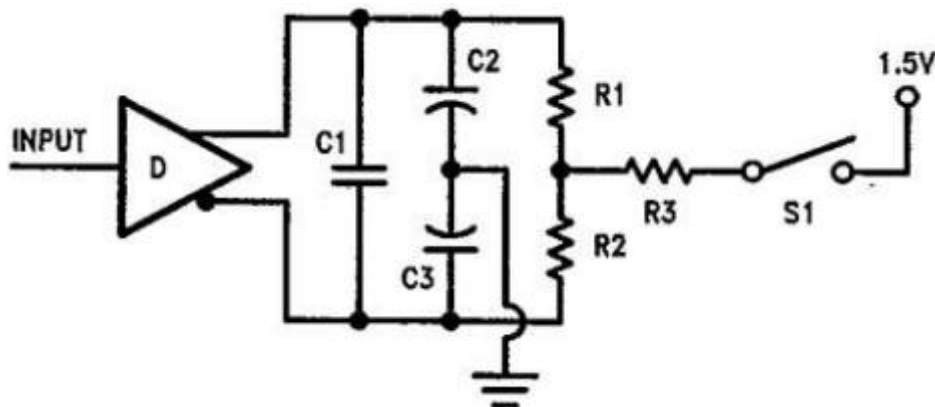

Note: $C1=C2=C3=40pF$, $R1=R2=50N$, $R3=5000\Omega$

FIGURE 1.AC Test Circuit

AC Test Circuit and Switching Time Waveforms (Continued)

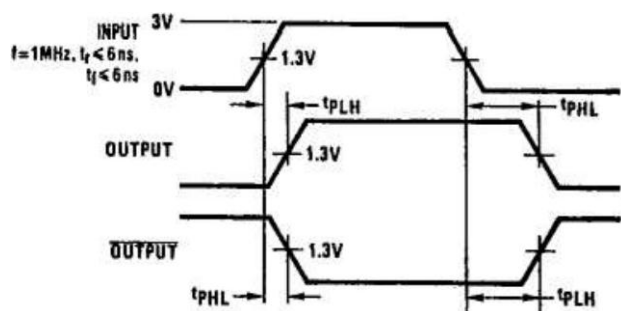


FIGURE 2. Propagation Delays

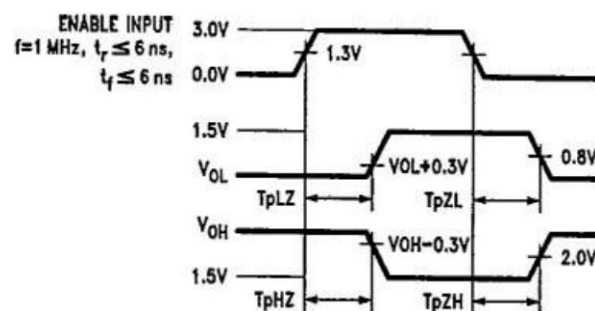


FIGURE 3. Enable and Disable Times


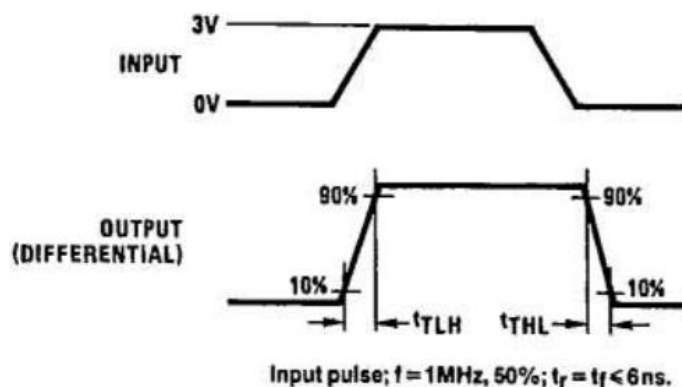


FIGURE 4. Differential Rise and Fall Times


Typical Applications

Two-Wire Balanced System, RS-422

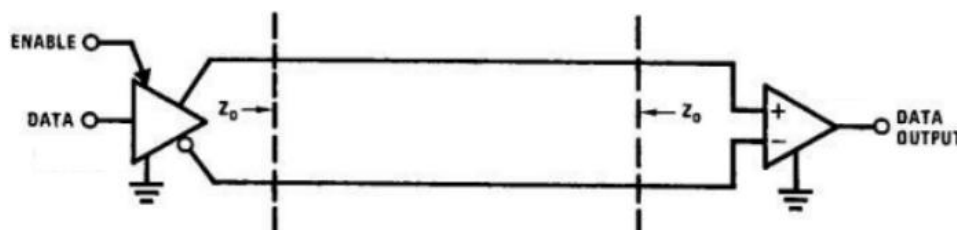


Physical Dimensions

DIP-16

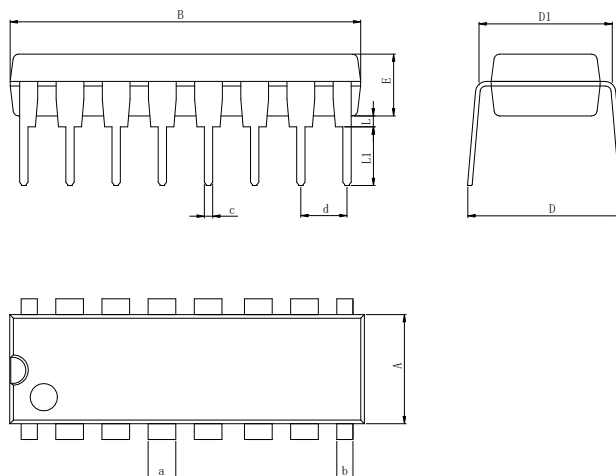

Dimensions In Millimeters(DIP-16)											
Symbol:	A	B	D	D1	E	L	L1	a	b	c	d
Min:	6.10	18.94	8.10	7.42	3.10	0.50	3.00	1.50	0.85	0.40	2.54 BSC
Max:	6.68	19.56	10.9	7.82	3.55	0.70	3.60	1.55	0.90	0.50	


SOP-16

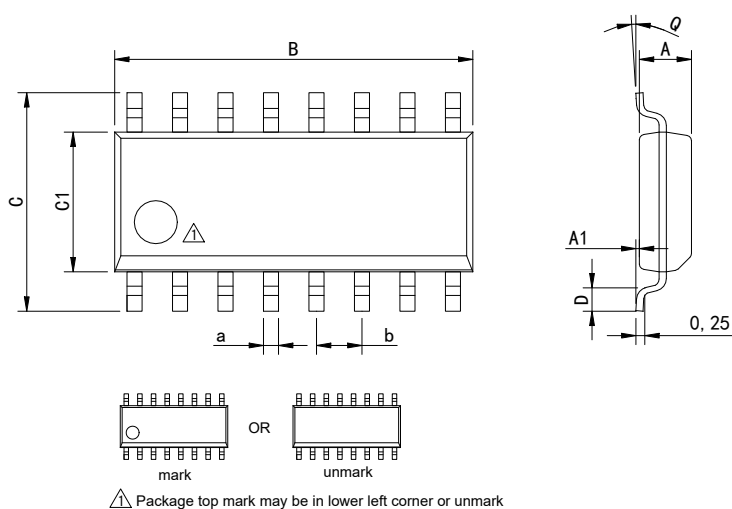

Dimensions In Millimeters(SOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	9.80	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	10.0	6.20	4.00	0.80	8°	0.45	

Physical Dimensions

TSSOP-16

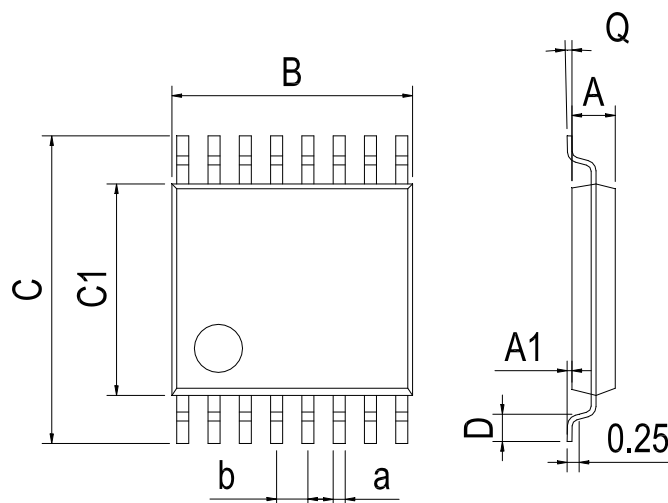

Dimensions In Millimeters(TSSOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	0.85	0.05	4.90	6.20	4.30	0.40	0°	0.20	0.65 BSC
Max:	0.95	0.20	5.10	6.60	4.50	0.80	8°	0.25	

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2017-1	New	1-9
V1.1	2019-9	Modify the package dimension diagramTSSOP-16、 Updated DIP-16 dimension、 Add annotation for Maximum Ratings.	2、 6、 8
V1.2	2022-6	Update encapsulation type	1
V1.3	2024-10	Update Lead Temperature	2
V1.4	2025-11	Update important statements、 Update SOP-16 Dimension drawing	6、 9

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.