


MMBT2907A

PNP SILICON TRANSISTOR

DESCRIPTION

This MMBT2907A is designed for use as a general purpose amplifier and switch requiring collector currents to 600 mA.




FEATURES

- * Epitaxial planar die construction
- * Complementary NPN Type available(MMBT2222A)

1. BASE
2. EMITTER
3. COLLECTOR

MARKING

Type Code: Marking: 2F



ABSOLUTE MAXIMUM RATINGS (Tc=25°C, unless otherwise specified)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CB0}	Collector-base voltage	-60	V
V _{CE0}	Collector-emitter voltage	-60	V
V _{EB0}	Emitter-base voltage	-5	V
I _c	Collector current	-0.6	A
P _c	Collector Power Dissipation	0.25	W
T _j	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-60~150	°C
R _{θJA}	Thermal Resistance From Junction To Ambient	500	°C/W

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

MMBT2907A

PNP SILICON TRANSISTOR

ELECTRICAL CHARACTERISTICS (Tc=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=-10\mu A, I_E=0$	-60		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}^*$	$I_C=-10mA, I_B=0$	-60		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-10\mu A, I_C=0$	-5		V
Collector cutoff current	I_{CBO}	$V_{CB}=-50V, I_E=0$		-20	nA
Collector cut-off current	I_{CEX}	$V_{CE}=-30V, V_{BE}=-0.5V$		-50	nA
Emitter cut-off current	I_{EBO}	$V_{EB}=-3V, I_C=0$		-10	nA
DC Current Gain	h_{FE1}	$V_{CE}=-10V, I_C=-150mA$	100	300	
	h_{FE2}	$V_{CE}=-10V, I_C=-0.1mA$	75		
	h_{FE3}	$V_{CE}=-10V, I_C=-1mA$	100		
	h_{FE4}	$V_{CE}=-10V, I_C=-10mA$	100		
	h_{FE5}	$V_{CE}=-10V, I_C=-500mA$	50		
Collector-emitter saturation voltage	$V_{CE(sat)}^*$	$I_C=-150mA, I_B=-15mA$		-0.4	V
		$I_C=-500mA, I_B=-50mA$		-1.6	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}^*$	$I_C=-150mA, I_B=-15mA$		-1.3	V
		$I_C=-500mA, I_B=-50mA$		-2.6	V
Transition frequency	f_T	$V_{CE}=-20V, I_C=-50mA, f=100MHz$	200		MHz
Delay time	t_d	$V_{CE}=-30V, I_C=-150mA$		10	ns
Rise time	t_r	$I_{B1}=-15mA$		25	ns
Storage time	t_s	$V_{CC}=-6V, I_C=-150mA$		225	ns
Fall time	t_f	$I_{B1}=I_{B2}=-15mA$		60	ns

*note:Pulse Test: Pulse Width $\leq 300ms$, Duty Cycle $\leq 2.0\%$

TEST CIRCUITS

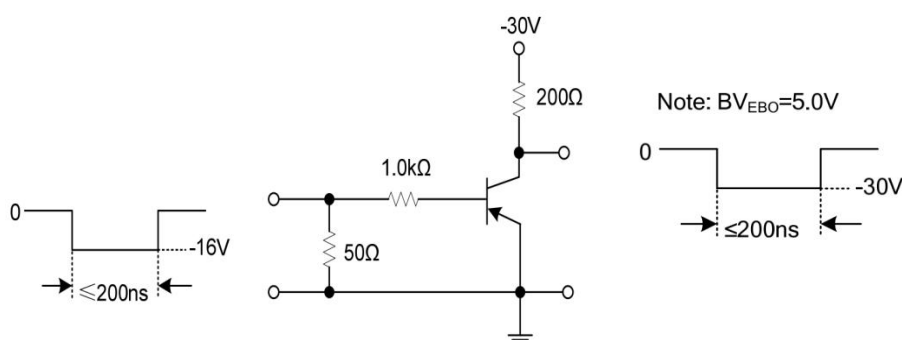


Fig 1. Saturated Turn-On Switching Time Test Circuit

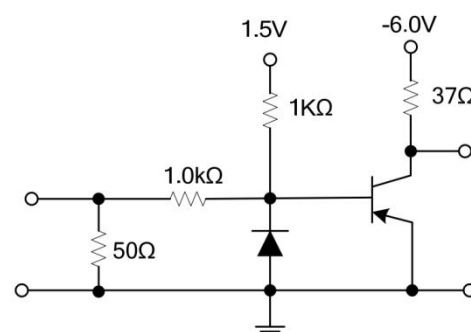



Fig 2. Saturated Turn-Off Switching Time Test Circuit



MMBT2907A

PNP SILICON TRANSISTOR


TYPICAL CHARACTERISTICS

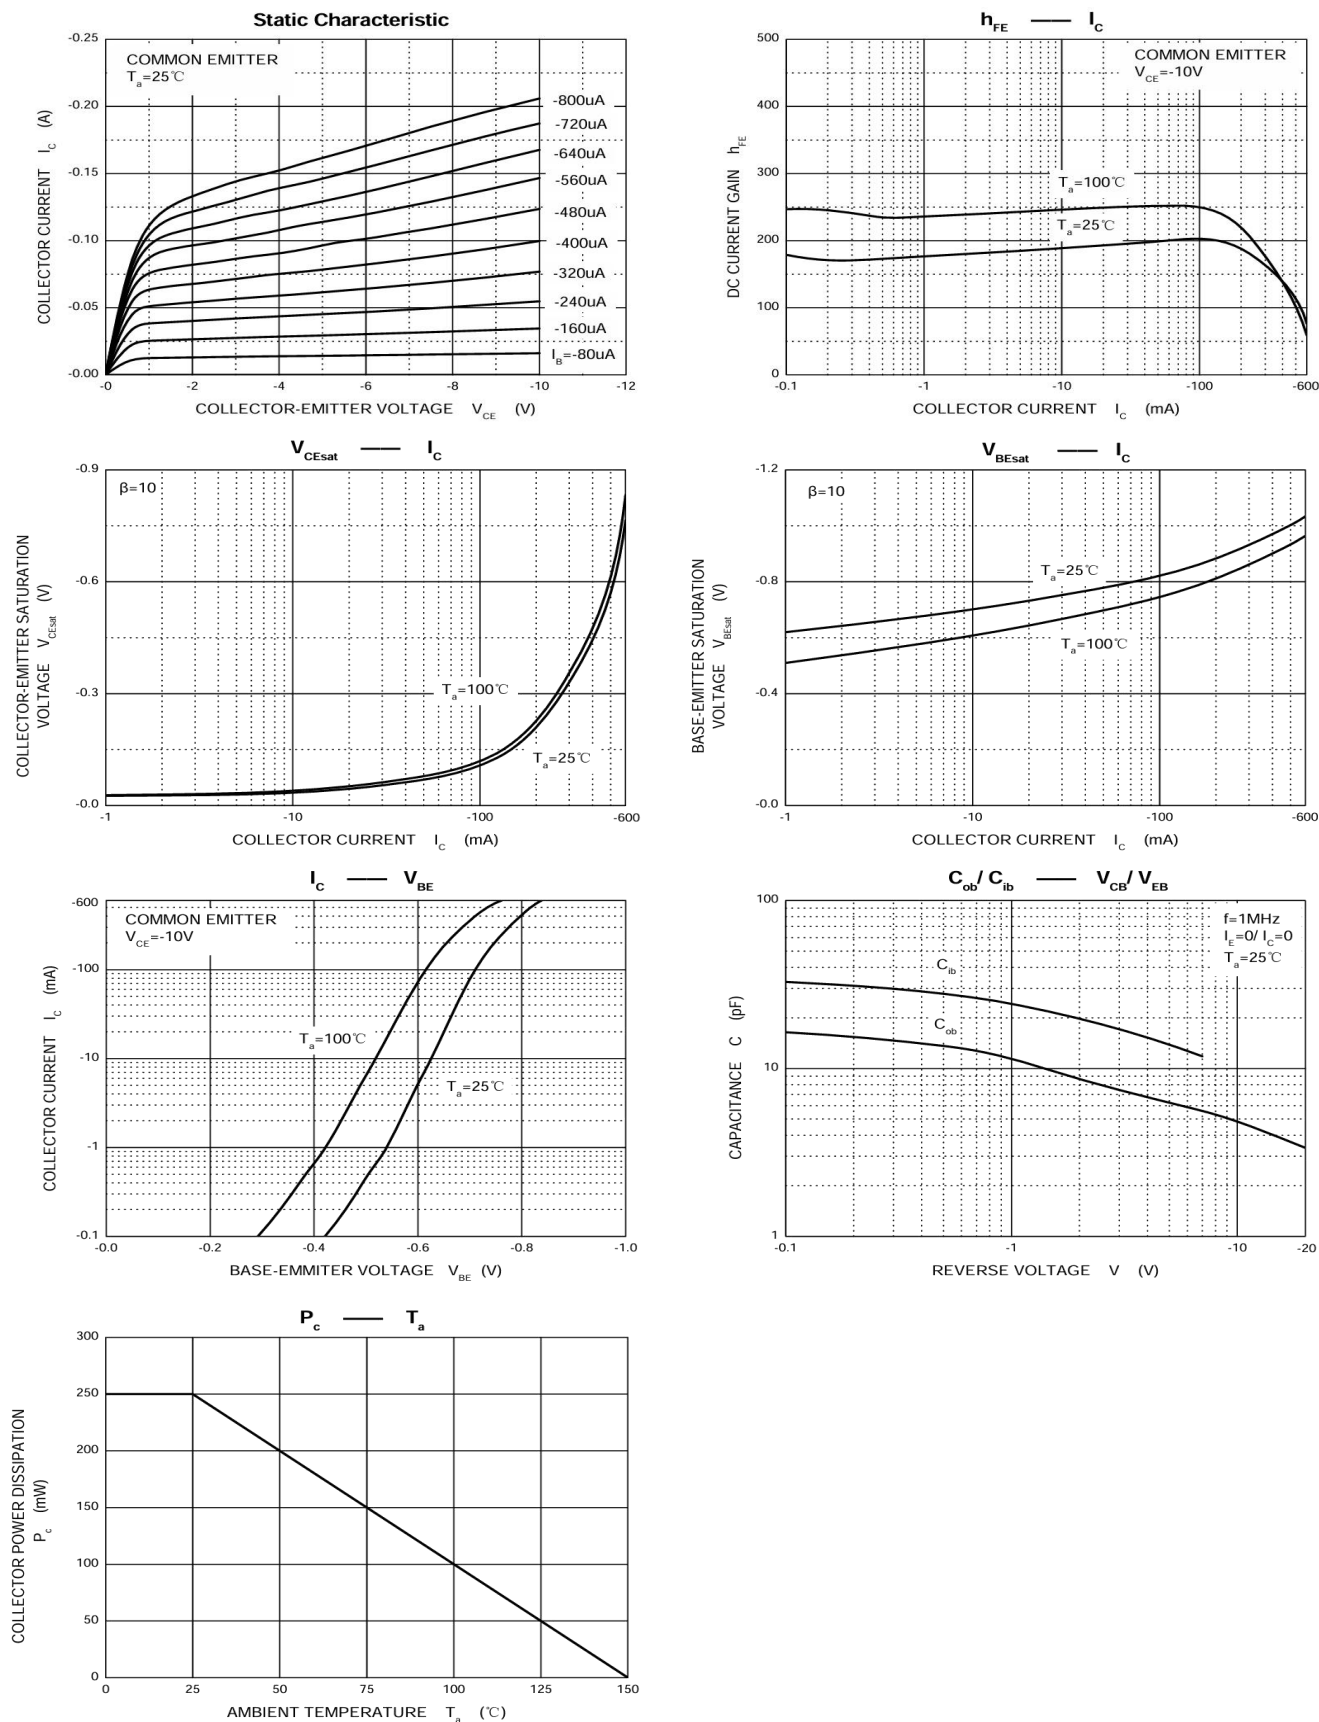


MMBT2907A

PNP SILICON TRANSISTOR

SOT23 PACKAGE OUTLINE DIMENSIONS

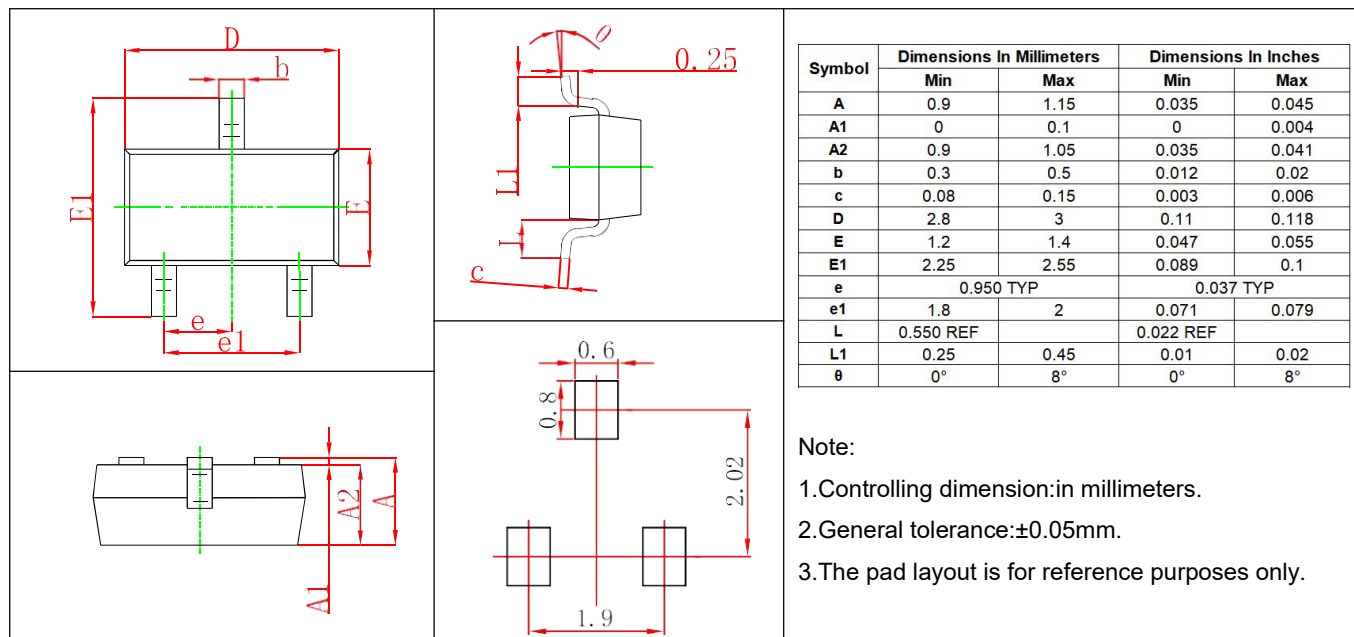

REEL PACKING

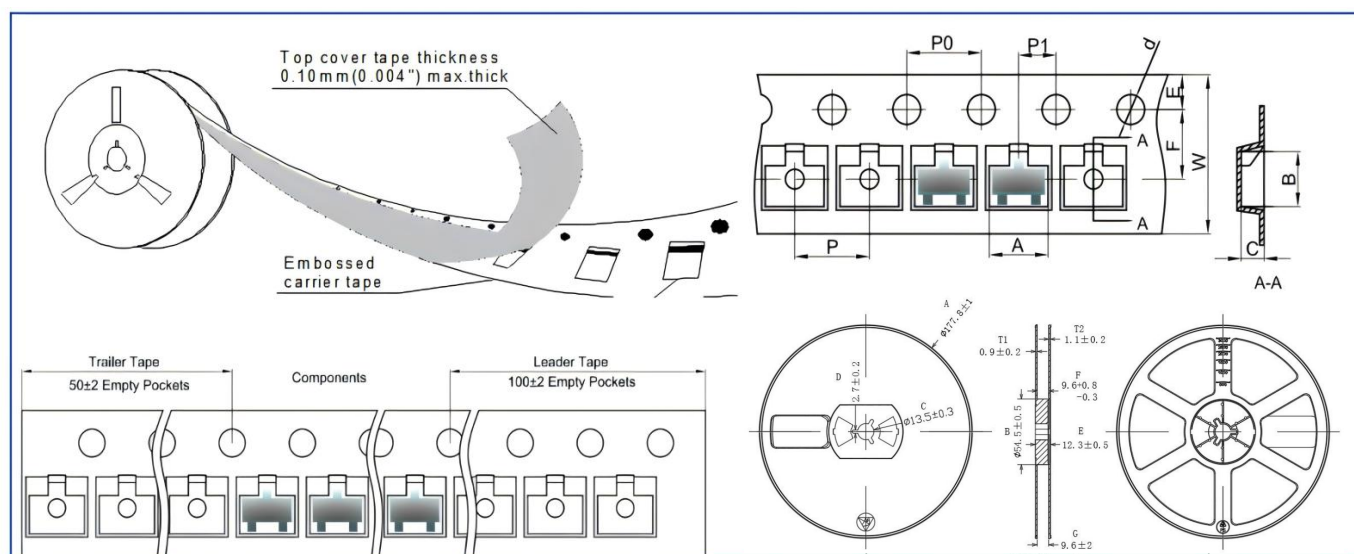

Dimensions are in millimeter										
PKG TYPE	A	B	C	d	E	F	Po	P	P1	W
SOT-23	3.17	2.77	1.22	Φ1.55	1.75	3.50	4.00	4.00	2.00	8.00
Reel Option	A	B	C	D	E	F	G	T1	T2	Q.TY PER REEL
7" Dia	Φ177.8	Φ54.5	Φ13.5	2.7	12.3	9.6	9.6	0.9	1.1	3000PCS